

CONTENTS

	PAGE
PREFACE	vii
FRONTISPIECE	viii
INTRODUCTION	1
METHOD OF ANALYSIS.....	1
RESULTS	2
Effect of Poisson's Ratio	2
ACCURACY OF METHOD OF ANALYSIS	3
APPENDIX I.....	41
An application to a Design Problem.....	41
APPENDIX II.....	46
The Finite Difference Method	46
Introduction	46
General Mathematical Relations	46
Application of Plate Fixed Along Three Edges and Free Along the Fourth.....	49
LIST OF REFERENCES.....	52

LIST OF FIGURES

Number	Page
1 Plate fixed along three edges, moment and reaction coefficients, Load I, uniform load	5
2 Plate fixed along three edges, moment and reaction coefficients, Load II, 2/3 uniform load	6
3 Plate fixed along three edges, moment and reaction coefficients, Load III, 1/3 uniform load	7
4 Plate fixed along three edges, moment and reaction coefficients, Load IV, uniformly varying load	8
5 Plate fixed along three edges, moment and reaction coefficients, Load V, 2/3 uniformly varying load.....	9
6 Plate fixed along three edges, moment and reaction coefficients, Load VI, 1/3 uniformly varying load.....	10
7 Plate fixed along three edges, moment and reaction coefficients, Load VII, 1/6 uniformly varying load.....	11
8 Plate fixed along three edges, moment and reaction coefficients, Load VIII, moment at free edge.....	12
9 Plate fixed along three edges, moment and reaction coefficients, Load IX, line load at free edge	13

Number		Page
10	Plate fixed along three edges -- Hinged along one edge, moment and reaction coefficients, Load I, uniform load	14
11	Plate fixed along three edges -- Hinged along one edge, moment and reaction coefficients, Load II, 2/3 uniform load	15
12	Plate fixed along three edges -- Hinged along one edge, moment and reaction coefficients, Load III, 1/3 uniform load	16
13	Plate fixed along three edges -- Hinged along one edge, moment and reaction coefficients, Load IV, uniformly varying load	17
14	Plate fixed along three edges -- Hinged along one edge, moment and reaction coefficients, Load V, 2/3 uniformly varying load	18
15	Plate fixed along three edges -- Hinged along one edge, moment and reaction coefficients, Load VI, 1/3 uniformly varying load	19
16	Plate fixed along three edges -- Hinged along one edge, moment and reaction coefficients, Load VII, 1/6 uniformly varying load	20
17	Plate fixed along three edges -- Hinged along one edge, moment and reaction coefficients, Load VIII, moment at hinged edge	21
18	Plate fixed along one edge -- Hinged along two opposite edges, moment and reaction coefficients, Load I, uniform load	22
19	Plate fixed along one edge -- Hinged along two opposite edges, moment and reaction coefficients, Load III, 2/3 uniform load	23
20	Plate fixed along one edge -- Hinged along two opposite edges, moment and reaction coefficients, Load III 1/3 uniform load	24
21	Plate fixed along one edge -- Hinged along two opposite edges, moment and reaction coefficients, Load IV, uniformly varying load	25
22	Plate fixed along one edge -- Hinged along two opposite edges, moment and reaction coefficients, Load V, 2/3 uniformly varying load	26
23	Plate fixed along one edge -- Hinged along two opposite edges, moment and reaction coefficients, Load VI, 1/3 uniformly varying load	27
24	Plate fixed along one edge -- Hinged along two opposite edges, moment and reaction coefficients, Load VII, 1/6 uniformly varying load	28

Number	Page
25	Plate fixed along one edge -- Hinged along two opposite edges, moment and reaction coefficients, Load VIII, moment at free edge 29
26	Plate fixed along one edge -- Hinged along two opposite edges, moment and reaction coefficients, Load IX, line load at free edge..... 30
27	Plate fixed along two adjacent edges, moment and reaction coefficients, Load I, uniform load 31
28	Plate fixed along two adjacent edges, moment and reaction coefficients, Load II, 2/3 uniform load 32
29	Plate fixed along two adjacent edges, moment and reaction coefficients, Load III, 1/3 uniform load 33
30	Plate fixed along two adjacent edges, moment and reaction coefficients, Load IV, uniformly varying load 34
31	Plate fixed along two adjacent edges, moment and reaction coefficients, Load V, 2/3 uniformly varying load..... 35
32	Plate fixed along two adjacent edges, moment and reaction coefficients, Load VI, 1/3 uniformly varying load 36
33	Plate fixed along two adjacent edges, moment and reaction coefficients, Load VII, 1/6 uniformly varying load..... 37
34	Plate fixed along four edges, moment and reaction coefficients, Load I, uniform load 38
35	Plate fixed along four edges, moment and reaction coefficients, Load X, uniformly varying load, $p = 0$ along $y = b/2$ 39
36	Plate fixed along four edges, moment and reaction coefficients, Load XI, uniformly varying load, $p = 0$ along $x = a/2$ 40
37	Counterfort wall, design example 45
38	Grid point designation system and notation 53
39	Load-deflection relations, Sheet I 54
40	Load-deflection relations, Sheet II 55
41	Load-deflection relations, Sheet III 56
42	Load-deflection relations, Sheet IV 57
43	Load-deflection relations, vertical spacing : 3 at h : 1 at $h/2$, Sheet V 58
44	Load-deflection relations, vertical spacing : 2 at h : 2 at $h/2$, Sheet VI 59
45	Load-deflection relations, vertical spacing : 2 at h : 1 at $h/2$: 1 at $h/4$, Sheet VII 60

Number	Page
46	Load-deflection relations, vertical spacing : 1 at h: 3 at h/2, Sheet VII 61
47	Load-deflection relations, vertical spacing : 1 at h: 1 at h/2: 2 at h/4, Sheet IX 62
48	Load-deflection relations, vertical spacing : 1 each at h, h/2, h/4 and h/8, Sheet X..... 63
49	Load-deflection relations, vertical spacing : 4 at h/2, Sheet XI 64
50	Load-deflection relations, vertical spacing: 1 at h/2: 3 at h/4, Sheet XII 65
51	Load-deflection relations, vertical spacing : 1 at h/2: 1 at h/4: 2 at h/8, Sheet XIII 66
52	Load-deflection relations, vertical spacing: 4 at h/4, Sheet XIV 67
53	Load-deflection relations, vertical spacing: 1 at h/4: 3 at h/8, Sheet XV 68
54	Load-deflection relations, vertical spacing: 4 at h/8, Sheet XVI 69
55	Load-deflection relations, horizontal spacing: 4 at rh/2, Sheet XVII..... 70
56	Load-deflection relations, horizontal spacing: 3 at rh/2, 1 at rh, Sheet XVIII..... 71
57	Load-deflection relations, horizontal spacing: 2 at rh/2, 2 at rh, Sheet XIX..... 72
58	Load-deflection relations, horizontal spacing: 1 at rh/2: 3 at rh, Sheet XX 73
59	Load-deflection relations, horizontal spacing: 4 at rh, Sheet XXI 74
60	Moment-deflection relations..... 75
61	Moment-deflection relations, various point spacings 76
62	Shear-deflection relations, Sheet I 77
63	Shear-deflection relations, Sheet II 78
64	Shear-deflection relations, Sheet III 79
65	Load-deflection coefficients, $r=1/4$, $\mu = 0.2$ 80
66	Plate fixed along three edges -- 30 equations for determining unknown deflections. $a/b = 1/4$ 81
67	Plate fixed along three edges, deflection coefficients. $a/b = 1/4$. Various loadings..... 82
68	Plate fixed along three edges -- 20 equations for determining unknown deflections. $a/b = 1/4$ 83
69	Numerical values of typical moment and reaction arrays, $r = 1/4$, $\mu = 0.2$ 84

Number	Page
70	Plate fixed along three edges, deflections--reactions-- bending moments, Load I. $a/b = 1 / 4$, $\mu = 0.2$ 85


LIST OF TABLES

Number	Page
I	Effect of Poisson's Ratio (μ) on Coefficients of Maximum Bending Moment at the Center of a Uniformly Loaded Rectangular Plate Fixed along Four Edges 4
II	Comparison of Coefficients of Maximum Bending Moment at the Center of a Uniformly Loaded Rectangular Plate Fixed along Four Edges..... 4
III	M_x for Heel Slab at Supports..... 41
IV	M_y for Heel Slab at Supports..... 42
V	M_x for Wall Slab at Supports..... 43
VI	M_y for Wall Slab at Supports..... 44


PREFACE

This monograph presents a series of tables containing computed data for use in the design of components of structures which can be idealized as rectangular plates or slabs. Typical examples are wall and footing panels of counterfort retaining walls. The tables provide the designer with a rapid and economical means of analyzing the structures at representative points. The data presented, as indicated in the accompanying figure on page viii, were computed for five sets of boundary conditions, nine ratios of lateral dimensions, and eleven loadings typical of those encountered in design.

As supplementary guides to the use and development of the data compiled in this monograph, two appendixes are included. The first appendix presents an example of application of the data to a typical structure. The second appendix explains the basic mathematical considerations and develops the application of the finite difference method to the solution of plate problems. A series of drawings in the appendixes presents basic relations which will aid in application of the method to other problems. Other drawings illustrate application of the method to one of the specific cases and lateral dimension ratios included in the monograph.

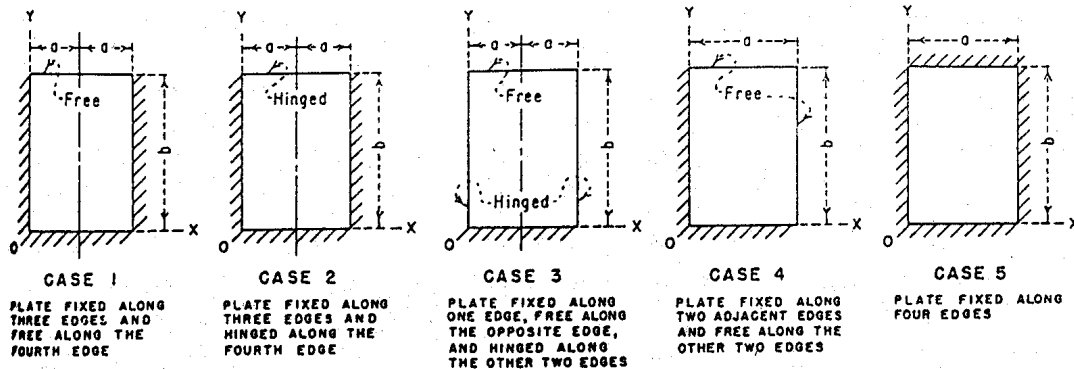

BOUNDARY CONDITIONS

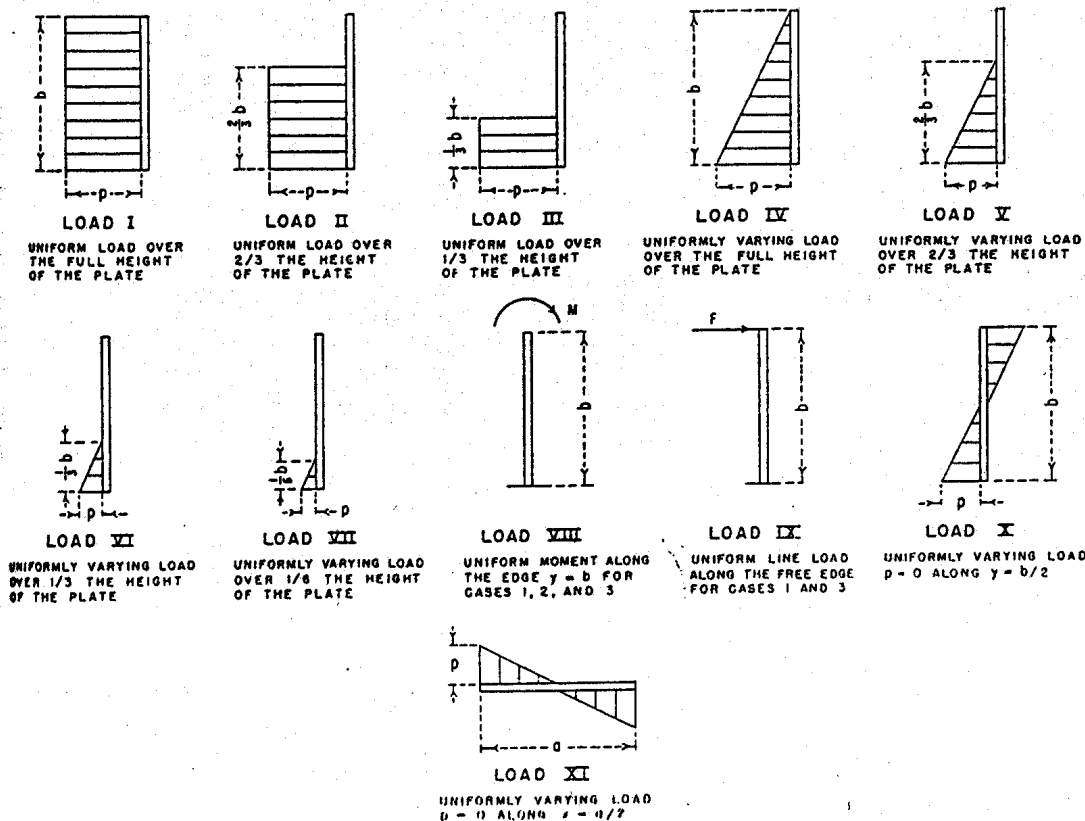

LOADING CONDITIONS

NOTES

The various cases are analyzed for the indicated ratios of a/b .

Cases 1, 2, and 3: $1/8, 1/4, 3/8, 1/2, 3/4, 1$, and $3/2$.

Case 4: $1/8, 1/4, 3/8, 1/2, 3/4$, and 1 .

Case 5: $3/8, 1/2, 5/8, 3/4, 7/8$, and 1 .

All results are based on a Poisson's ratio of 0.2.

INDEX OF BOUNDARY AND LOADING CONDITIONS

FRONTISPIECE

INTRODUCTION

Certain components of many structures may be logically idealized as laterally loaded, rectangular plates or slabs having various conditions of edge support. This monograph presents tables of coefficients which can be used to determine moments and reactions in such structures for various loading conditions and for several ratios of lateral dimensions.

The finite difference method was used in the analysis of the structures and in the development of the tables. This method, de-

scribed in Appendix II of this monograph, makes possible the analysis of rectangular plates for any of the usual types of edge conditions, and in addition it can readily take into account virtually all types of loading. An inherent disadvantage of the method lies in the great amount of work required in solution of the large number of simultaneous equations to which it gives rise. However, such equations can be readily systematized and solved by an electronic calculator, thus largely offsetting this disadvantage.

METHOD OF ANALYSIS

The finite difference method is based on the usual approximate theory for the bending of thin plates subjected to lateral loads.^{1*} The customary assumptions are made, therefore, with regard to homogeneity, isotropy, conformance with Hooke's law, and relative magnitudes of deflections, thickness, and lateral dimensions. (See Appendix II.)

Solution by finite differences provides a means of determining a set of deflections for discrete points of a plate subjected to given loading and edge conditions. The deflections are determined in such a manner that the deflection of any point, together with those of certain nearby points, satisfy finite difference relations which correspond to the differential expressions of the usual plate theory. These expressions relate coordinates and deflections to load and edge conditions.

In this study, for each load and ratio of lateral dimensions, deflections were determined at 30 or more grid points by solution of an equal number of simultaneous equations. A relatively closer spacing of points was used in some instances near fixed boundaries to attain the desired accuracy in this region of high curvature. For the a/b ratios $1/4$ and $1/8$, one and two additional sets, respectively, of five deflections were determined in the vicinity of the x axis. Owing to the limitations on computer capacity, these deflections were computed by solution of supplementary sets of 20 equations whose right-hand members were functions of certain of the initially computed deflections as well as of the loads. In each case, the solution of the equations was made through the use of an electronic calculator.

Computations of moments and reactions were made using desk calculators and the appropriate finite difference relations. The finite difference relations used are discussed in Appendix II.

* Numbers in superscript refer to publications in List of References on page 52.

RESULTS

Figures 1 through 36 present the results of these studies as tables of dimensionless coefficients for the rectangular components of bending moment and for reactions at the supports. The studies were carried out for the following edge, or boundary, conditions:

- Case 1: Plate fixed along three edges and free along the fourth edge
- Case 2: Plate fixed along three edges and hinged along the fourth edge
- Case 3: Plate fixed along one edge, free along the opposite edge, and hinged along the other two edges
- Case 4: Plate fixed along two adjacent edges and free along the other two edges
- Case 5: Plate fixed along four edges

The loads, selected because they are representative of conditions frequently encountered in structures, are:

- Load I: Uniform load over the full height of the plate
- Load II: Uniform load over $2/3$ the height of the plate
- Load III: Uniform load over $1/3$ the height of the plate
- Load IV: Uniformly varying load over the full height of the plate
- Load V: Uniformly varying load over $2/3$ the height of the plate
- Load VI: Uniformly varying load over $1/3$ the height of the plate
- Load VII: Uniformly varying load over $1/6$ the height of the plate
- Load VIII: Uniform moment along the edge $y = b$ of the plate for Cases 1, 2, and 3
- Load IX: Uniform line load along the free edge of the plate for Cases 1 and 3
- Load X: Uniformly varying load, $p = 0$ along $y = b/2$
- Load XI: Uniformly varying load, $p = 0$ along $x = a/2$

Plates with the following ratios of lateral dimensions, a , to height b , were studied for the first four cases: $1/8$, $1/4$, $3/8$, $1/2$, $3/4$, 1 , $3/2$. The analysis was carried out for these cases using Loads I through IX and all dimension ratios, except that Load IX was omitted from Case 2 for obvious reasons, and Loads VIII and IX and the ratio $a/b = 3/2$ were omitted from Case 4. It will be noted that for the first three cases, which have symmetry about a vertical axis, the dimension a denotes one-half of the plate width, and for the fourth, unsymmetrical case, a denotes the full width. For Case 5, lateral dimension ratios of $3/8$, $1/2$, $5/8$, $3/4$, $7/8$ and 1 were studied, subjected to Loads I, X, and XI. For this case, a and b denote the full lateral dimensions. All numerical results are based on a value of Poisson's ratio of 0.2 .

The arrangement of the tables is such that each coefficient, both for reaction and moment, appears in the tables at a point which corresponds geometrically to its location in the plate as shown in each accompanying sketch.

Effect of Poisson's Ratio

A question which frequently arises is: What effect does Poisson's ratio have on the bending moments in a plate? For the plate fixed along four sides, a clear understanding of this effect can be determined easily, since the deflections computed from finite difference theory are independent of Poisson's ratio. Furthermore, the bending moments at, and normal to, the fixed edges are unaffected by this factor. It is reasonable then to conclude that insofar as the moments which are most important in design are concerned, the maximum effect for this case will occur at the center of the slab.

Table I shows a comparison of maximum bending moment coefficients at the center of a uniformly loaded plate for several values of μ and for each ratio of a/b for which Case 5 was computed. For a change in Poisson's ratio from 0.2 to 0.3 it is noted that the maximum effect on the bending moment coefficient occurs at $a/b = 1$, where the change in the coefficient is less than 8 percent.

ACCURACY OF METHOD OF ANALYSIS

The finite difference method is inherently approximate. A factor directly affecting its accuracy is the closeness of spacing, hence the number, of grid points. In obtaining the solutions presented in this monograph, a maximum number of points was used, consistent with the objectives of the study and the capacity of the available electronic calculator.

A few instances may be found where there appear to be irregularities in the orderly progression of the coefficients as the ratio a/b changes. Such instances are most likely to occur in the low values of the ratio where, to gain accuracy, the number of points used in the analysis was increased as a/b decreased. Although these inconsistencies are undesirable from an academic standpoint, they are not of sufficient magnitude to affect materially the usefulness of the results.

As a general check on the finite difference method, problems for which "exact" solutions are known have been computed. The results indicate that for spacings comparable to those

used in this study, errors in the maximum moments may be of the order of five percent. Such accuracy is considered to be satisfactory for design purposes. Percentage errors for small numerical values of the coefficients may, of course, be somewhat higher.

For Case 5 a comparison is given in Table II between values found on page 228 of Reference 1 and directly equivalent values obtained by the method of this monograph. In this particular case, the relative differences are, for the most part, less than one percent.

Comparisons have also been made with other existing results² for full uniformly varying load and certain ratios of a/b . These indicated very good agreement.

All coefficients have been computed to four decimal places for consistency and to indicate significant figures for many conditions which would have no significance to three decimal places. This should not be taken as an indication that the percentage accuracy is greater than noted above.

ACKNOWLEDGMENTS

The writer was assisted in the numerical computations by W. S. Young, J. R. Brizzolara, and D. Misterek. H. J. Kahm assisted in the computations and in checking the results obtained. The figures were pre-

pared by H. E. Willmann.

Solutions of the simultaneous equations were performed using an electronic calculator under the direction of F. E. Swain.

TABLE I

Effect of Poisson's Ratio (μ) on Coefficients of Maximum Bending Moment at the Center of a Uniformly Loaded Rectangular Plate Fixed along Four Edges

Values of M_x/pa^2				
μ a/b	0	0.1	0.2	0.3
0.375	-0.0423	-0.0424	-0.0424	-0.0425
0.5	-0.0403	-0.0407	-0.0411	-0.0415
0.625	-0.0358	-0.0367	-0.0376	-0.0384
0.75	-0.0298	-0.0311	-0.0324	-0.0337
0.875	-0.0235	-0.0251	-0.0267	-0.0283
1.0	-0.0177	-0.0195	-0.0213	-0.0230

TABLE II


Comparison of Coefficients of Maximum Bending Moment at the Center of a Uniformly Loaded Rectangular Plate Fixed along Four Edges

b/a	Values of M_x/pa^2 from	
	Timoshenko ^{1/}	Method of this Monograph ^{2/}
1.1	-0.0264	-0.0269
1.2	-0.0299	-0.0301
1.3	-0.0327	-0.0329
1.4	-0.0349	-0.0352
1.6	-0.0381	-0.0384
1.7	-0.0392	-0.0395
1.8	-0.0401	-0.0404
1.9	-0.0407	-0.0410

^{1/} These values taken directly from page 228, Reference 1 with due regard for difference in sign conventions.

^{2/} These values interpolated from the column for $\mu = 0.3$ of the preceding table.

	y/b	x/a	M _x						M _y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
a/b = 1/8	1.0	+1.249	+0.052	+0.024	+0.002	-0.014	-0.024	-0.027	0	0	0	0	0	0
	0.8	+1.248	+0.051	+0.023	+0.002	-0.014	-0.023	-0.026	+0.010	+0.005	+0.000	-0.003	-0.005	-0.005
	0.6	+1.247	+0.052	+0.023	+0.002	-0.014	-0.023	-0.027	+0.010	+0.005	+0.000	-0.003	-0.005	-0.005
	0.4	+1.250	+0.051	+0.023	+0.001	-0.014	-0.023	-0.027	+0.010	+0.005	+0.000	-0.003	-0.005	-0.006
	0.2	+1.185	+0.048	+0.021	+0.001	-0.013	-0.021	-0.024	+0.010	+0.004	-0.001	-0.004	-0.006	-0.007
	0	+0.504	0	+0.001	+0.003	+0.005	+0.006	+0.007	0	+0.006	+0.016	+0.025	+0.031	+0.033
a/b = 1/4	R _x	R _y	+0.504	+0.116	+0.058	+0.089	+0.104	+0.111						
	1.0	+2.483	+0.209	+0.096	+0.007	-0.057	-0.096	-0.109	0	0	0	0	0	0
	0.8	+2.523	+0.206	+0.093	+0.006	-0.056	-0.093	-0.105	+0.041	+0.019	+0.002	-0.009	-0.016	-0.019
	0.6	+2.513	+0.205	+0.093	+0.006	-0.056	-0.093	-0.105	+0.041	+0.018	+0.000	-0.013	-0.021	-0.023
	0.4	+2.512	+0.196	+0.085	+0.003	-0.054	-0.088	-0.099	+0.039	+0.016	-0.004	-0.018	-0.027	-0.030
	0.2	+1.905	+0.137	+0.053	-0.003	-0.039	-0.059	-0.065	+0.027	+0.007	-0.011	-0.024	-0.032	-0.034
a/b = 3/8	0	+0.295	0	+0.005	+0.013	+0.020	+0.025	+0.027	0	+0.023	+0.063	+0.101	+0.126	+0.135
	R _x	R _y	+0.295	+0.236	+0.113	+0.179	+0.217	+0.230						
	1.0	+3.711	+0.476	+0.219	+0.016	-0.130	-0.218	-0.247	0	0	0	0	0	0
	0.8	+3.896	+0.466	+0.208	+0.012	-0.126	-0.208	-0.235	+0.093	+0.042	+0.004	-0.022	-0.038	-0.043
	0.6	+3.757	+0.442	+0.193	+0.007	-0.122	-0.198	-0.223	+0.088	+0.036	-0.007	-0.039	-0.059	-0.065
	0.4	+3.541	+0.379	+0.155	-0.003	-0.107	-0.167	-0.186	+0.076	+0.024	-0.021	-0.054	-0.075	-0.082
a/b = 1/2	0.2	+2.133	+0.210	+0.075	-0.009	-0.059	-0.085	-0.093	+0.042	+0.009	-0.017	-0.034	-0.044	-0.047
	0	-0.015	0	+0.010	+0.027	+0.043	+0.054	+0.058	0	+0.050	+0.135	+0.215	+0.269	+0.288
	R _x	R _y	-0.015	+0.303	+0.166	+0.264	+0.320	+0.340						
	1.0	+5.101	+0.852	+0.384	+0.022	-0.233	-0.383	-0.432	0	0	0	0	0	0
	0.8	+5.331	+0.807	+0.349	+0.013	-0.218	-0.353	-0.397	+0.161	+0.068	-0.001	-0.049	-0.077	-0.086
	0.6	+4.805	+0.712	+0.298	-0.000	-0.199	-0.313	-0.350	+0.142	+0.051	-0.026	-0.084	-0.120	-0.132
a/b = 3/4	0.4	+4.148	+0.545	+0.209	-0.014	-0.156	-0.233	-0.258	+0.109	+0.026	-0.043	-0.094	-0.125	-0.135
	0.2	+1.928	+0.250	+0.087	-0.009	-0.063	-0.089	-0.096	+0.050	+0.015	-0.003	-0.008	-0.008	-0.007
	0	-0.294	0	+0.019	+0.050	+0.080	+0.100	+0.107	0	+0.094	+0.252	+0.399	+0.499	+0.534
	R _x	R _y	-0.294	+0.482	+0.223	+0.359	+0.432	+0.457						
	1.0	+8.592	+1.788	+0.716	-0.010	-0.471	-0.726	-0.807	0	0	0	0	0	0
	0.8	+7.864	+1.552	+0.607	-0.020	-0.414	-0.630	-0.698	+0.310	+0.112	-0.027	-0.119	-0.172	-0.190
a/b = 1	0.6	+5.989	+1.207	+0.460	-0.033	-0.336	-0.498	-0.549	+0.241	+0.071	-0.067	-0.166	-0.225	-0.245
	0.4	+4.378	+0.786	+0.280	-0.033	-0.214	-0.306	-0.333	+0.157	+0.036	-0.049	-0.100	-0.127	-0.135
	0.2	+1.185	+0.289	+0.109	+0.009	-0.034	-0.049	-0.053	+0.058	+0.060	+0.115	+0.186	+0.241	+0.262
	0	-0.0694	0	+0.042	+0.115	+0.182	+0.227	+0.242	0	+0.212	+0.576	+0.911	+1.135	+1.212
	R _x	R _y	-0.0694	+0.806	+0.338	+0.527	+0.636	+0.672						
	1.0	+1.2115	+0.2613	+0.0883	-0.0105	-0.0654	-0.0927	-0.1008	0	0	0	0	0	0
a/b = 3/2	0.8	+0.9558	+0.2146	+0.0727	-0.0097	-0.0551	-0.0774	-0.0840	+0.0429	+0.0134	-0.0051	-0.0464	-0.0224	-0.0243
	0.6	+0.6250	+0.1547	+0.0325	-0.0083	-0.0411	-0.0566	-0.0611	+0.0309	+0.0090	-0.0069	-0.0169	-0.0222	-0.0238
	0.4	+0.3984	+0.0916	+0.0305	-0.0043	-0.0216	-0.0290	-0.0310	+0.0183	+0.0069	+0.0029	+0.0030	+0.0045	+0.0053
	0.2	+0.0434	+0.0303	+0.0127	+0.0047	+0.0033	+0.0042	+0.0048	+0.0061	+0.0149	+0.0339	+0.0542	+0.0689	+0.0742
	0	-0.0939	0	+0.0074	+0.0199	+0.0311	+0.0384	+0.0409	0	+0.0369	+0.0996	+0.1556	+0.1919	+0.2043
	R _x	R _y	-0.0939	+0.1167	+0.4453	+0.6760	+0.8043	+0.8450						

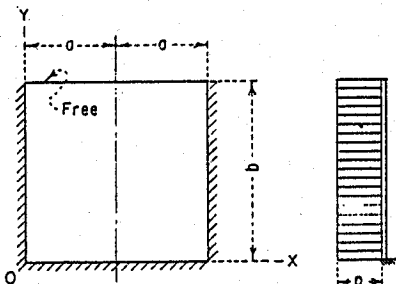

Moment = (Coefficient) (pb²)

Reaction = (Coefficient) (pb)






FIGURE 1 - Plate fixed along three edges, moment and reaction coefficients, Load 1, uniform load.

	y/b	R_x	x/a	M_x						M_y					
				0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	-0.0005	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000	-0.0000	0	0	0	0	0	0
	0.8	+0.0074	+0.0005	+0.0003	+0.0001	-0.0001	-0.0002	-0.0003	-0.0003	+0.0001	+0.0001	+0.0001	+0.0001	+0.0001	+0.0001
	0.6	+0.0965	+0.0039	+0.0017	+0.0001	-0.0011	-0.0017	-0.0020	-0.0020	+0.0008	+0.0003	-0.0000	-0.0003	-0.0004	-0.0005
	0.4	+0.1252	+0.0051	+0.0023	+0.0001	-0.0014	-0.0023	-0.0026	-0.0026	+0.0010	+0.0004	-0.0000	-0.0003	-0.0005	-0.0006
	0.2	+0.1185	+0.0048	+0.0021	+0.0001	-0.0013	-0.0021	-0.0024	-0.0024	+0.0010	+0.0004	-0.0001	-0.0004	-0.0006	-0.0007
	0	+0.0503	0	+0.0001	+0.0003	+0.0005	+0.0005	+0.0007	+0.0007	0	+0.0006	+0.0016	+0.0025	+0.0031	+0.0033
	R_x/R_y	+0.0503	+0.0116	+0.0568	+0.0893	+0.1082	+0.1149								
$a/b = 1/4$	1.0	-0.0088	+0.0005	+0.0006	+0.0002	-0.0002	-0.0005	-0.0007	-0.0007	0	0	0	0	0	0
	0.8	+0.0265	+0.0039	+0.0022	+0.0005	-0.0009	-0.0019	-0.0022	-0.0022	+0.0008	+0.0007	+0.0007	+0.0007	+0.0007	+0.0008
	0.6	+0.1886	+0.0142	+0.0060	+0.0001	-0.0040	-0.0064	-0.0071	-0.0071	+0.0028	+0.0010	-0.0005	-0.0016	-0.0022	-0.0025
	0.4	+0.2495	+0.0184	+0.0077	-0.0000	-0.0052	-0.0082	-0.0092	-0.0092	+0.0037	+0.0013	-0.0008	-0.0024	-0.0034	-0.0037
	0.2	+0.1917	+0.0136	+0.0051	-0.0004	-0.0039	-0.0059	-0.0065	-0.0065	+0.0027	+0.0006	-0.0012	-0.0026	-0.0034	-0.0037
	0	+0.0299	0	+0.0005	+0.0013	+0.0020	+0.0025	+0.0027	+0.0027	0	+0.0024	+0.0063	+0.0100	+0.0126	+0.0134
	R_x/R_y	+0.0299	+0.0241	+0.1138	+0.1792	+0.2177	+0.2304								
$a/b = 3/8$	1.0	-0.0257	+0.0038	+0.0035	+0.0012	-0.0014	-0.0032	-0.0039	-0.0039	0	0	0	0	0	0
	0.8	+0.0694	+0.0127	+0.0068	+0.0012	-0.0033	-0.0061	-0.0071	-0.0071	+0.0025	+0.0018	+0.0014	+0.0011	+0.0009	+0.0008
	0.6	+0.2724	+0.0282	+0.0113	-0.0004	-0.0081	-0.0124	-0.0138	-0.0138	+0.0056	+0.0015	-0.0020	-0.0047	-0.0064	-0.0070
	0.4	+0.3440	+0.0330	+0.0123	-0.0013	-0.0097	-0.0142	-0.0156	-0.0156	+0.0066	+0.0013	-0.0036	-0.0073	-0.0096	-0.0104
	0.2	+0.2181	+0.0201	+0.0067	-0.0013	-0.0058	-0.0080	-0.0087	-0.0087	+0.0040	+0.0005	-0.0025	-0.0046	-0.0058	-0.0062
	0	+0.0016	0	+0.0010	+0.0026	+0.0041	+0.0051	+0.0055	+0.0055	0	+0.0050	+0.0131	+0.0206	+0.0256	+0.0274
	R_x/R_y	+0.0016	+0.0367	+0.1705	+0.2632	+0.3165	+0.3338								
$a/b = 1/2$	1.0	-0.0272	+0.0130	+0.0096	+0.0025	-0.0043	-0.0089	-0.0106	-0.0106	0	0	0	0	0	0
	0.8	+0.1263	+0.0257	+0.0128	+0.0015	-0.0070	-0.0122	-0.0139	-0.0139	+0.0051	+0.0030	+0.0013	-0.0000	-0.0009	-0.0012
	0.6	+0.3370	+0.0419	+0.0154	-0.0017	-0.0123	-0.0181	-0.0199	-0.0199	+0.0084	+0.0013	-0.0049	-0.0097	-0.0126	-0.0136
	0.4	+0.3937	+0.0433	+0.0138	-0.0034	-0.0130	-0.0178	-0.0193	-0.0193	+0.0086	+0.0001	-0.0075	-0.0132	-0.0167	-0.0178
	0.2	+0.2072	+0.0227	+0.0064	-0.0021	-0.0062	-0.0078	-0.0083	-0.0083	+0.0045	+0.0002	-0.0027	-0.0044	-0.0052	-0.0054
	0	-0.0203	0	+0.0018	+0.0046	+0.0071	+0.0087	+0.0092	+0.0092	0	+0.0090	+0.0230	+0.0354	+0.0434	+0.0461
	R_x/R_y	-0.0203	+0.0680	+0.2337	+0.3439	+0.4048	+0.4241								
$a/b = 3/4$	1.0	+0.0479	+0.0445	+0.0243	+0.0028	-0.0134	-0.0230	-0.0261	-0.0261	0	0	0	0	0	0
	0.8	+0.2273	+0.0541	+0.0232	+0.0002	-0.0150	-0.0236	-0.0263	-0.0263	+0.0108	+0.0046	-0.0006	-0.0046	-0.0072	-0.0080
	0.6	+0.3991	+0.0617	+0.0190	-0.0051	-0.0185	-0.0251	-0.0271	-0.0271	+0.0123	-0.0007	-0.0116	-0.0194	-0.0240	-0.0255
	0.4	+0.4133	+0.0528	+0.0124	-0.0069	-0.0158	-0.0196	-0.0206	-0.0206	+0.0106	-0.0030	-0.0137	-0.0206	-0.0243	-0.0254
	0.2	+0.1705	+0.0234	+0.0048	-0.0024	-0.0044	-0.0047	-0.0046	-0.0046	+0.0047	+0.0008	-0.0008	-0.0027	-0.0046	-0.0054
	0	-0.0441	0	+0.0038	+0.0090	+0.0133	+0.0158	+0.0167	+0.0167	0	+0.0191	+0.0452	+0.0663	+0.0792	+0.0835
	R_x/R_y	-0.0441	+0.1382	+0.3413	+0.4628	+0.5249	+0.5438								
$a/b = 1$	1.0	+0.1608	+0.0753	+0.0324	-0.0005	-0.0209	-0.0314	-0.0346	-0.0346	0	0	0	0	0	0
	0.8	+0.2896	+0.0757	+0.0274	-0.0032	-0.0205	-0.0290	-0.0315	-0.0315	+0.0151	+0.0051	-0.0027	-0.0083	-0.0115	-0.0125
	0.6	+0.4033	+0.0722	+0.0183	-0.0083	-0.0211	-0.0267	-0.0282	-0.0282	+0.0144	-0.0030	-0.0160	-0.0241	-0.0284	-0.0296
	0.4	+0.3959	+0.0548	+0.0094	-0.0086	-0.0153	-0.0175	-0.0180	-0.0180	+0.0110	-0.0055	-0.0155	-0.0201	-0.0217	-0.0221
	0.2	+0.1392	+0.0222	+0.0036	-0.0011	-0.0010	-0.0001	+0.0003	+0.0003	+0.0044	+0.0031	+0.0086	+0.0160	+0.0217	+0.0237
	0	-0.0523	0	+0.0061	+0.0136	+0.0192	+0.0226	+0.0237	+0.0237	0	+0.0307	+0.0680	+0.0962	+0.1129	+0.1184
	R_x/R_y	-0.0523	+0.2041	+0.4214	+0.5401	+0.5977	+0.6149								
$a/b = 3/2$	1.0	+0.3060	+0.1036	+0.0271	-0.0103	-0.0247	-0.0290	-0.0298	-0.0298	0	0	0	0	0	0
	0.8	+0.3324	+0.0922	+0.0204	-0.0111	-0.0221	-0.0248	-0.0252	-0.0252	+0.0184	+0.0035	-0.0055	-0.0099	-0.0116	-0.0120
	0.6	+0.3934	+0.0759	+0.0100	-0.0131	-0.0194	-0.0202	-0.0200	-0.0200	+0.0152	-0.0071	-0.0184	-0.0221	-0.0227	-0.0226
	0.4	+0.3615	+0.0511	+0.0028	-0.0092	-0.0104	-0.0093	-0.0087	-0.0087	+0.0102	-0.0075	-0.0107	-0.0073	-0.0034	-0.0018
	0.2	+0.1087	+0.0189	+0.0026	-0.0030	+0.0064	+0.0090	+0.0099	+0.0099	+0.0038	+0.0105	+0.0290	+0.0465	+0.0579	+0.0617
	0	-0.0489	0	+0.0112	+0.0220	+0.0292	+0.0351	+0.0344	+0.0344	0	+0.0558	+0.1100	+0.1460	+0.1657	+0.1719
	R_x/R_y	-0.0489	+0.3190	+0.5306	+0.6247	+0.6632	+0.6737								

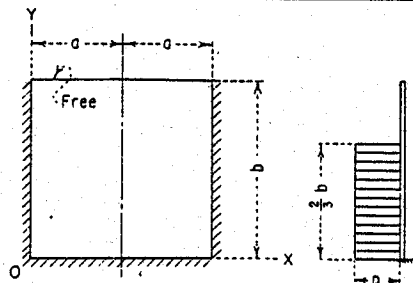

$$\text{Moment} = (\text{Coefficient})(pb^2)$$


$$\text{Reaction} = (\text{Coefficient})(pb)$$




POSITIVE SIGN CONVENTION

FIGURE 2 - Plate fixed along three edges, moment and reaction coefficients, Load II, 2/3 uniform load.

	y/b	x/a	M _x						M _y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
			R _x	R _y										
a/b = 1/8	1.0	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	0	0	0	0	0	0
	0.8	-0.0001	-0.0000	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	-0.0002	+0.0001	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0001
	0.4	+0.0286	+0.0013	+0.0006	+0.0001	-0.0003	-0.0006	-0.0007	+0.0003	+0.0001	+0.0001	-0.0000	-0.0000	-0.0001
	0.2	+0.1109	+0.0044	+0.0019	+0.0000	-0.0012	-0.0019	-0.0022	+0.0009	+0.0003	-0.0001	-0.0005	-0.0007	-0.0008
	0	+0.0505	0	+0.0001	+0.0003	+0.0005	+0.0006	+0.0007	0	+0.0006	+0.0016	+0.0025	+0.0031	+0.0033
		R _x R _y	+0.0505	+0.0125	+0.0570	+0.0893	+0.1083	+0.1145						
a/b = 1/4	1.0	-0.0013	-0.0001	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	0	0	0	0	0	0
	0.8	-0.0009	+0.0001	+0.0001	+0.0001	-0.0000	-0.0001	-0.0001	+0.0000	+0.0000	+0.0001	+0.0001	+0.0002	+0.0002
	0.6	+0.0039	+0.0011	+0.0007	+0.0002	-0.0003	-0.0006	-0.0007	+0.0002	+0.0002	+0.0003	+0.0004	+0.0004	+0.0004
	0.4	+0.0653	+0.0055	+0.0025	+0.0001	-0.0015	-0.0025	-0.0028	+0.0011	+0.0005	+0.0000	-0.0004	-0.0006	-0.0007
	0.2	+0.1703	+0.0105	+0.0034	-0.0008	-0.0032	-0.0044	-0.0047	+0.0021	+0.0001	-0.0017	-0.0032	-0.0040	-0.0043
	0	+0.0354	0	+0.0004	+0.0011	+0.0017	+0.0021	+0.0023	0	+0.0022	+0.0057	+0.0087	+0.0107	+0.0114
		R _x R _y	+0.0354	+0.0344	+0.1162	+0.1704	+0.2004	+0.2099						
a/b = 3/8	1.0	-0.0075	-0.0001	+0.0002	+0.0002	-0.0000	-0.0002	-0.0003	0	0	0	0	0	0
	0.8	+0.0020	+0.0012	+0.0008	+0.0003	-0.0003	-0.0006	-0.0008	+0.0002	+0.0003	+0.0004	+0.0005	+0.0005	+0.0006
	0.6	+0.0167	+0.0035	+0.0022	+0.0004	-0.0010	-0.0019	-0.0022	+0.0008	+0.0007	+0.0006	+0.0006	+0.0005	+0.0005
	0.4	+0.0947	+0.0103	+0.0039	-0.0004	-0.0030	-0.0044	-0.0048	+0.0021	+0.0006	-0.0008	-0.0019	-0.0027	-0.0029
	0.2	+0.1940	+0.0140	+0.0031	-0.0025	-0.0043	-0.0049	-0.0051	+0.0028	-0.0009	-0.0042	-0.0061	-0.0072	-0.0076
	0	+0.0171	0	+0.0008	+0.0020	+0.0029	+0.0035	+0.0037	0	+0.0041	+0.0099	+0.0146	+0.0175	+0.0184
		R _x R _y	+0.0171	+0.0623	+0.1653	+0.2211	+0.2485	+0.2567						
a/b = 1/2	1.0	-0.0135	+0.0008	+0.0011	+0.0004	-0.0004	-0.0010	-0.0012	0	0	0	0	0	0
	0.8	+0.0103	+0.0032	+0.0019	+0.0005	-0.0008	-0.0017	-0.0020	+0.0006	+0.0005	+0.0005	+0.0005	+0.0005	+0.0005
	0.6	+0.0305	+0.0068	+0.0033	+0.0003	-0.0019	-0.0031	-0.0035	+0.0014	+0.0009	+0.0004	-0.0001	-0.0004	-0.0005
	0.4	+0.1090	+0.0125	+0.0039	-0.0011	-0.0038	-0.0050	-0.0053	+0.0025	+0.0002	-0.0021	-0.0039	-0.0050	-0.0054
	0.2	+0.1846	+0.0131	+0.0015	-0.0027	-0.0040	-0.0043	-0.0043	+0.0026	-0.0019	-0.0052	-0.0071	-0.0081	-0.0083
	0	+0.0093	0	+0.0013	+0.0029	+0.0040	+0.0047	+0.0049	0	+0.0066	+0.0144	+0.0202	+0.0236	+0.0247
		R _x R _y	+0.0093	+0.1028	+0.2064	+0.2593	+0.2836	+0.2905						
a/b = 3/4	1.0	-0.0086	+0.0053	+0.0036	+0.0007	-0.0017	-0.0033	-0.0038	0	0	0	0	0	0
	0.8	+0.0270	+0.0079	+0.0038	+0.0003	-0.0022	-0.0036	-0.0041	+0.0016	+0.0009	+0.0004	-0.0001	-0.0005	-0.0006
	0.6	+0.0439	+0.0107	+0.0040	-0.0006	-0.0031	-0.0043	-0.0047	+0.0021	+0.0009	-0.0006	-0.0019	-0.0028	-0.0031
	0.4	+0.1131	+0.0140	+0.0025	-0.0024	-0.0042	-0.0048	-0.0050	+0.0028	-0.0011	-0.0044	-0.0066	-0.0078	-0.0082
	0.2	+0.1738	+0.0114	-0.0006	-0.0030	-0.0031	-0.0029	-0.0027	+0.0023	-0.0036	-0.0063	-0.0070	-0.0070	-0.0069
	0	+0.0046	0	+0.0024	+0.0045	+0.0058	+0.0065	+0.0067	0	+0.0119	+0.0225	+0.0291	+0.0326	+0.0336
		R _x R _y	+0.0046	+0.1652	+0.2588	+0.2967	+0.3116	+0.3156						
a/b = 1	1.0	+0.0066	+0.0100	+0.0050	+0.0002	-0.0030	-0.0047	-0.0052	0	0	0	0	0	0
	0.8	+0.0374	+0.0113	+0.0046	-0.0003	-0.0031	-0.0045	-0.0049	+0.0023	+0.0011	+0.0001	-0.0008	-0.0014	-0.0015
	0.6	+0.0459	+0.0126	+0.0035	-0.0013	-0.0035	-0.0044	-0.0046	+0.0025	+0.0006	-0.0015	-0.0031	-0.0040	-0.0043
	0.4	+0.1081	+0.0136	+0.0010	-0.0029	-0.0039	-0.0041	-0.0041	+0.0027	-0.0022	-0.0057	-0.0074	-0.0081	-0.0082
	0.2	+0.1696	+0.0095	-0.0016	-0.0026	-0.0021	-0.0017	-0.0016	+0.0019	-0.0046	-0.0058	-0.0051	-0.0042	-0.0039
	0	+0.0083	0	+0.0034	+0.0058	+0.0071	+0.0078	+0.0080	0	+0.0168	+0.0288	+0.0355	+0.0389	+0.0399
		R _x R _y	+0.0083	+0.2073	+0.2860	+0.3134	+0.3239	+0.3267						
a/b = 3/2	1.0	+0.0281	+0.0146	+0.0043	-0.0014	-0.0037	-0.0043	-0.0045	0	0	0	0	0	0
	0.8	+0.0453	+0.0140	+0.0034	-0.0017	-0.0034	-0.0038	-0.0038	+0.0028	+0.0009	-0.0005	-0.0013	-0.0016	-0.0017
	0.6	+0.0409	+0.0130	+0.0017	-0.0023	-0.0032	-0.0032	-0.0031	+0.0026	-0.0002	-0.0023	-0.0033	-0.0035	-0.0036
	0.4	+0.0980	+0.0116	-0.0009	-0.0029	-0.0028	-0.0025	-0.0024	+0.0023	-0.0039	-0.0060	-0.0061	-0.0056	-0.0054
	0.2	+0.1801	+0.0067	-0.0021	-0.0015	-0.0006	-0.0001	+0.0000	+0.0013	-0.0048	-0.0030	-0.0004	+0.0014	+0.0020
	0	+0.0221	0	+0.0049	+0.0075	+0.0088	+0.0095	+0.0097	0	+0.0247	+0.0375	+0.0441	+0.0473	+0.0483
		R _y	+0.0221	+0.2561	+0.3114	+0.3277	+0.3334	+0.3349						

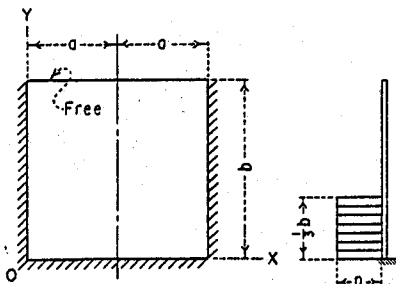


Moment = (Coefficient) (pb²)
Reaction = (Coefficient) (pb)



POSITIVE SIGN CONVENTION

FIGURE 3 - Plate fixed along three edges, moment and reaction coefficients, Load III, 1/3 uniform load.

	y/b	R _x \ x/a	M _x							M _y						
			0	0.2	0.4	0.6	0.8	1.0		0	0.2	0.4	0.6	0.8	1.0	
a/b = 1/8	1.0	+ .0082	+ .0004	+ .0002	+ .0000	- .0001	- .0002	- .0002		0	0	0	0	0	0	
	0.8	+ .0251	+ .0011	+ .0005	+ .0000	- .0003	- .0005	- .0005		+ .0002	+ .0001	+ .0000	- .0000	- .0001	- .0001	
	0.6	+ .0496	+ .0021	+ .0009	+ .0001	- .0006	- .0009	- .0011		+ .0004	+ .0002	+ .0000	- .0001	- .0002	- .0002	
	0.4	+ .0751	+ .0031	+ .0014	+ .0001	- .0008	- .0014	- .0016		+ .0006	+ .0003	+ .0000	- .0002	- .0003	- .0003	
	0.2	+ .0942	+ .0038	+ .0016	+ .0000	- .0010	- .0017	- .0019		+ .0008	+ .0003	- .0000	- .0003	- .0005	- .0005	
	0	+ .0460	0	+ .0001	+ .0003	+ .0005	+ .0006	+ .0006		0	+ .0005	+ .0014	+ .0023	+ .0028	+ .0030	
	R _x \ R _y	+ .0460	+ .0136	+ .0543	+ .0839	+ .1004	+ .1056									
a/b = 1/4	1.0	+ .0147	+ .0022	+ .0012	+ .0002	- .0006	- .0012	- .0014		0	0	0	0	0	0	
	0.8	+ .0523	+ .0046	+ .0022	+ .0002	- .0012	- .0021	- .0024		+ .0009	+ .0005	+ .0002	- .0000	- .0002	- .0002	
	0.6	+ .1015	+ .0083	+ .0037	+ .0002	- .0023	- .0038	- .0042		+ .0017	+ .0007	- .0000	- .0005	- .0009	- .0010	
	0.4	+ .1514	+ .0114	+ .0049	+ .0001	- .0032	- .0051	- .0057		+ .0023	+ .0008	- .0004	- .0013	- .0019	- .0021	
	0.2	+ .1494	+ .0102	+ .0037	- .0004	- .0030	- .0043	- .0047		+ .0020	+ .0004	- .0011	- .0022	- .0029	- .0031	
	0	+ .0304	0	+ .0004	+ .0010	+ .0016	+ .0020	+ .0021		0	+ .0020	+ .0032	+ .0081	+ .0100	+ .0107	
	R _x \ R _y	+ .0304	+ .0309	+ .1052	+ .1563	+ .1856	+ .1950									
a/b = 3/8	1.0	+ .0189	+ .0066	+ .0040	+ .0008	- .0020	- .0039	- .0045		0	0	0	0	0	0	
	0.8	+ .0885	+ .0117	+ .0056	+ .0006	- .0031	- .0054	- .0062		+ .0023	+ .0012	+ .0004	- .0002	- .0005	- .0007	
	0.6	+ .1541	+ .0176	+ .0075	+ .0001	- .0049	- .0079	- .0088		+ .0035	+ .0013	- .0006	- .0020	- .0029	- .0032	
	0.4	+ .2107	+ .0208	+ .0079	- .0007	- .0061	- .0090	- .0099		+ .0042	+ .0009	- .0019	- .0042	- .0056	- .0061	
	0.2	+ .1691	+ .0145	+ .0045	- .0012	- .0042	- .0057	- .0061		+ .0029	+ .0001	- .0022	- .0039	- .0048	- .0051	
	0	+ .0102	0	+ .0008	+ .0020	+ .0030	+ .0038	+ .0040		0	+ .0039	+ .0099	+ .0152	+ .0188	+ .0200	
	R _x \ R _y	+ .0102	+ .0474	+ .1488	+ .2154	+ .2526	+ .2645									
a/b = 1/2	1.0	+ .0326	+ .0151	+ .0088	+ .0015	- .0046	- .0084	- .0097		0	0	0	0	0	0	
	0.8	+ .1315	+ .0216	+ .0099	+ .0007	- .0059	- .0099	- .0112		+ .0043	+ .0020	+ .0002	- .0011	- .0019	- .0022	
	0.6	+ .1972	+ .0273	+ .0108	- .0005	- .0079	- .0119	- .0132		+ .0055	+ .0015	- .0020	- .0047	- .0064	- .0070	
	0.4	+ .2421	+ .0277	+ .0092	- .0019	- .0082	- .0115	- .0125		+ .0055	+ .0004	- .0042	- .0076	- .0097	- .0104	
	0.2	+ .1607	+ .0160	+ .0041	- .0017	- .0044	- .0055	- .0058		+ .0032	- .0002	- .0026	- .0039	- .0044	- .0046	
	0	- .0045	0	+ .0014	+ .0033	+ .0050	+ .0061	+ .0065		0	+ .0068	+ .0167	+ .0252	+ .0307	+ .0325	
	R _x \ R _y	- .0045	+ .0744	+ .1942	+ .2699	+ .3108	+ .3236									
a/b = 3/4	1.0	+ .1061	+ .0406	+ .0196	+ .0013	- .0115	- .0190	- .0214		0	0	0	0	0	0	
	0.8	+ .2077	+ .0433	+ .0177	- .0003	- .0119	- .0184	- .0205		+ .0087	+ .0031	- .0012	- .0042	- .0061	- .0067	
	0.6	+ .2408	+ .0426	+ .0145	- .0026	- .0124	- .0174	- .0189		+ .0085	+ .0010	- .0055	- .0102	- .0130	- .0139	
	0.4	+ .2542	+ .0349	+ .0091	- .0039	- .0102	- .0130	- .0138		+ .0070	- .0011	- .0075	- .0115	- .0137	- .0143	
	0.2	+ .1337	+ .0163	+ .0031	- .0017	- .0031	- .0033	- .0033		+ .0033	+ .0001	- .0000	+ .0014	+ .0029	+ .0035	
	0	- .0196	0	+ .0028	+ .0064	+ .0093	+ .0111	+ .0117		0	+ .0139	+ .0320	+ .0465	+ .0554	+ .0584	
	R _x \ R _y	- .0196	+ .1256	+ .2666	+ .3496	+ .3923	+ .4055									
a/b = 1	1.0	+ .1985	+ .0644	+ .0253	- .0013	- .0172	- .0252	- .0276		0	0	0	0	0	0	
	0.8	+ .2564	+ .0601	+ .0210	- .0028	- .0161	- .0226	- .0245		+ .0120	+ .0034	- .0026	- .0065	- .0088	- .0095	
	0.6	+ .2485	+ .0515	+ .0149	- .0047	- .0145	- .0189	- .0201		+ .0103	+ .0003	- .0075	- .0125	- .0151	- .0159	
	0.4	+ .2411	+ .0372	+ .0078	- .0049	- .0100	- .0118	- .0122		+ .0074	- .0021	- .0076	- .0099	- .0106	- .0107	
	0.2	+ .1108	+ .0154	+ .0025	- .0006	- .0006	- .0000	+ .0003		+ .0031	+ .0018	+ .0060	+ .0116	+ .0160	+ .0175	
	0	- .0241	0	+ .0044	+ .0096	+ .0137	+ .0161	+ .0169		0	+ .0220	+ .0482	+ .0683	+ .0804	+ .0845	
	R _x \ R _y	- .0241	+ .1691	+ .3199	+ .4038	+ .4457	+ .4584									
a/b = 3/2	1.0	+ .3127	+ .0857	+ .0207	- .0087	- .0199	- .0232	- .0238		0	0	0	0	0	0	
	0.8	+ .2929	+ .0730	+ .0158	- .0086	- .0172	- .0194	- .0198		+ .0146	+ .0023	- .0042	- .0072	- .0082	- .0085	
	0.6	+ .2352	+ .0560	+ .0094	- .0083	- .0134	- .0142	- .0141		+ .0112	- .0013	- .0077	- .0096	- .0096	- .0094	
	0.4	+ .2148	+ .0359	+ .0038	- .0053	- .0065	- .0057	- .0053		+ .0072	- .0021	- .0023	+ .0012	+ .0046	+ .0059	
	0.2	+ .0897	+ .0132	+ .0021	+ .0025	+ .0050	+ .0069	+ .0076		+ .0026	+ .0077	+ .0220	+ .0356	+ .0444	+ .0474	
	0	- .0204	0	+ .0079	+ .0158	+ .0212	+ .0243	+ .0252		0	+ .0396	+ .0791	+ .1062	+ .1214	+ .1262	
	R _y	- .0204	+ .2452	+ .3964	+ .4668	+ .4966	+ .5047									

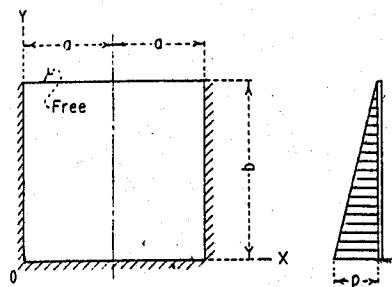

Moment = (Coefficient)(pb²)
Reaction = (Coefficient)(pb)





FIGURE 4 - Plate fixed along three edges, moment and reaction coefficients, Load IV, uniformly varying load.

	y/b	x/a	M_x						M_y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	R_x	-0.0000	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000	0	0	0	0	0
	0.8	R_x	+0.0002	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	R_x	+0.0142	+0.0006	+0.0003	+0.0000	-0.0002	-0.0003	-0.0003	+0.0001	+0.0001	+0.0000	-0.0000	-0.0000
	0.4	R_x	+0.0499	+0.0021	+0.0009	+0.0001	-0.0006	-0.0009	-0.0011	+0.0004	+0.0002	+0.0000	-0.0001	-0.0002
	0.2	R_x	+0.0818	+0.0032	+0.0014	+0.0000	-0.0009	-0.0014	-0.0016	+0.0006	+0.0003	-0.0001	-0.0003	-0.0004
	0	R_x	+0.0437	0	+0.0001	+0.0003	+0.0004	+0.0003	+0.0006	0	+0.0005	+0.0014	+0.0021	+0.0028
		R_y	+0.0437	+0.0145	+0.0537	+0.0810	+0.0959	+0.1015						
$a/b = 1/4$	1.0	R_x	-0.0026	+0.0000	+0.0001	+0.0000	-0.0000	-0.0001	-0.0001	0	0	0	0	0
	0.8	R_x	+0.0019	+0.0006	+0.0004	+0.0001	-0.0001	-0.0003	-0.0004	+0.0001	+0.0001	+0.0002	+0.0003	+0.0003
	0.6	R_x	+0.0323	+0.0031	+0.0015	+0.0002	-0.0008	-0.0014	-0.0017	+0.0006	+0.0004	+0.0002	+0.0001	-0.0000
	0.4	R_x	+0.1011	+0.0075	+0.0031	-0.0000	-0.0021	-0.0033	-0.0037	+0.0015	+0.0005	-0.0003	-0.0010	-0.0014
	0.2	R_x	+0.1286	+0.0084	+0.0030	-0.0005	-0.0025	-0.0035	-0.0038	+0.0017	+0.0002	-0.0010	-0.0020	-0.0027
	0	R_x	+0.0308	0	+0.0004	+0.0009	+0.0014	+0.0018	+0.0019	0	+0.0019	+0.0047	+0.0071	+0.0088
		R_y	+0.0308	+0.0345	+0.1011	+0.1450	+0.1695	+0.1773						
$a/b = 3/8$	1.0	R_x	-0.0104	+0.0005	+0.0007	+0.0003	-0.0002	-0.0006	-0.0008	0	0	0	0	0
	0.8	R_x	+0.0107	+0.0027	+0.0017	+0.0004	-0.0007	-0.0014	-0.0016	+0.0005	+0.0005	+0.0005	+0.0006	+0.0006
	0.6	R_x	+0.0558	+0.0074	+0.0034	+0.0002	-0.0020	-0.0034	-0.0038	+0.0015	+0.0008	+0.0001	-0.0004	-0.0007
	0.4	R_x	+0.1388	+0.0131	+0.0047	-0.0006	-0.0039	-0.0056	-0.0061	+0.0026	+0.0004	-0.0015	-0.0031	-0.0041
	0.2	R_x	+0.1457	+0.0114	+0.0031	-0.0012	-0.0034	-0.0043	-0.0046	+0.0023	-0.0002	-0.0023	-0.0038	-0.0047
	0	R_x	+0.0155	0	+0.0007	+0.0016	+0.0024	+0.0030	+0.0032	0	+0.0033	+0.0081	+0.0122	+0.0149
		R_y	+0.0155	+0.0549	+0.1389	+0.1907	+0.2183	+0.2269						
$a/b = 1/2$	1.0	R_x	-0.0155	+0.0025	+0.0023	+0.0007	-0.0009	-0.0021	-0.0025	0	0	0	0	0
	0.8	R_x	+0.0258	+0.0063	+0.0034	+0.0006	-0.0017	-0.0031	-0.0036	+0.0013	+0.0009	+0.0006	+0.0005	+0.0003
	0.6	R_x	+0.0763	+0.0118	+0.0049	-0.0001	-0.0034	-0.0052	-0.0058	+0.0024	+0.0009	-0.0005	-0.0016	-0.0024
	0.4	R_x	+0.1515	+0.0165	+0.0049	-0.0016	-0.0050	-0.0067	-0.0072	+0.0033	-0.0001	-0.0033	-0.0056	-0.0071
	0.2	R_x	+0.1429	+0.0119	+0.0023	-0.0018	-0.0034	-0.0040	-0.0041	+0.0024	-0.0008	-0.0032	-0.0045	-0.0052
	0	R_x	+0.0062	0	+0.0011	+0.0026	+0.0037	+0.0045	+0.0047	0	+0.0056	+0.0129	+0.0187	+0.0223
		R_y	+0.0062	+0.0833	+0.1758	+0.2283	+0.2546	+0.2625						
$a/b = 3/4$	1.0	R_x	-0.0005	+0.0108	+0.0065	+0.0010	-0.0034	-0.0060	-0.0069	0	0	0	0	0
	0.8	R_x	+0.0542	+0.0143	+0.0065	+0.0003	-0.0040	-0.0064	-0.0072	+0.0029	+0.0014	+0.0002	-0.0008	-0.0014
	0.6	R_x	+0.0961	+0.0178	+0.0059	-0.0013	-0.0053	-0.0072	-0.0078	+0.0036	+0.0005	-0.0024	-0.0046	-0.0060
	0.4	R_x	+0.1629	+0.0190	+0.0036	-0.0031	-0.0058	-0.0068	-0.0071	+0.0038	-0.0017	-0.0061	-0.0089	-0.0104
	0.2	R_x	+0.1277	+0.0111	+0.0007	-0.0021	-0.0026	-0.0025	-0.0024	+0.0022	-0.0016	-0.0031	-0.0031	-0.0028
	0	R_x	-0.0003	0	+0.0021	+0.0044	+0.0060	+0.0069	+0.0072	0	+0.0107	+0.0220	+0.0300	+0.0345
		R_y	-0.0003	+0.1334	+0.2277	+0.2736	+0.2945	+0.3005						
$a/b = 1$	1.0	R_x	+0.0284	+0.0191	+0.0088	+0.0001	-0.0055	-0.0084	-0.0093	0	0	0	0	0
	0.8	R_x	+0.0718	+0.0202	+0.0077	-0.0007	-0.0059	-0.0079	-0.0086	+0.0040	+0.0016	-0.0003	-0.0019	-0.0028
	0.6	R_x	+0.0990	+0.0208	+0.0055	-0.0023	-0.0060	-0.0075	-0.0079	+0.0042	-0.0001	-0.0038	-0.0063	-0.0076
	0.4	R_x	+0.1570	+0.0189	+0.0021	-0.0037	-0.0055	-0.0060	-0.0061	+0.0038	-0.0031	-0.0074	-0.0094	-0.0102
	0.2	R_x	+0.1191	+0.0098	-0.0002	-0.0017	-0.0014	-0.0010	-0.0008	+0.0020	-0.0017	-0.0014	+0.0004	+0.0020
	0	R_x	+0.0011	0	+0.0032	+0.0060	+0.0079	+0.0089	+0.0092	0	+0.0158	+0.0300	+0.0393	+0.0445
		R_y	+0.0011	+0.1712	+0.2595	+0.2983	+0.3153	+0.3202						
$a/b = 3/2$	1.0	R_x	+0.0673	+0.0270	+0.0075	-0.0026	-0.0066	-0.0078	-0.0080	0	0	0	0	0
	0.8	R_x	+0.0843	+0.0249	+0.0057	-0.0030	-0.0060	-0.0067	-0.0068	+0.0050	+0.0013	-0.0012	-0.0025	-0.0030
	0.6	R_x	+0.0922	+0.0217	+0.0028	-0.0038	-0.0055	-0.0056	-0.0055	+0.0043	-0.0014	-0.0048	-0.0062	-0.0064
	0.4	R_x	+0.1461	+0.0168	-0.0004	-0.0038	-0.0039	-0.0035	-0.0033	+0.0034	-0.0047	-0.0069	-0.0065	-0.0055
	0.2	R_x	+0.1183	+0.0075	-0.0007	-0.0003	+0.0009	+0.0016	+0.0019	+0.0015	-0.0005	+0.0040	+0.0087	+0.0118
	0	R_x	+0.0110	0	+0.0051	+0.0086	+0.0107	+0.0118	+0.0122	0	+0.0253	+0.0430	+0.0536	+0.0591
		R_y	+0.0110	+0.2226	+0.2954	+0.3224	+0.3329	+0.3356						

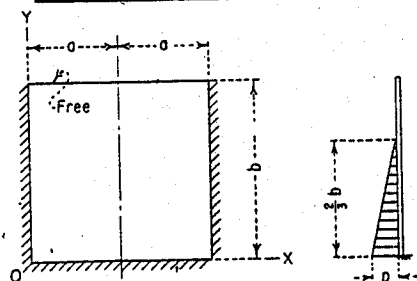

Moment = (Coefficient)(pb^2)
Reaction = (Coefficient)(pb)






FIGURE 5 - Plate fixed along three edges, moment and reaction coefficients, Load V, $2/3$ uniformly varying load.

	y/b	$R_x \searrow x/a$	M_x						M_y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	- .0000	- .0000	- .0000	- .0000	+ .0000	+ .0000	+ .0000	0	0	0	0	0	0
	0.8	- .0000	- .0000	+ .0000	+ .0000	+ .0000	+ .0000	+ .0000	- .0000	+ .0000	+ .0000	+ .0000	+ .0000	+ .0000
	0.6	- .0003	+ .0000	+ .0000	+ .0000	- .0000	- .0000	- .0000	+ .0000	+ .0000	+ .0000	+ .0000	+ .0000	+ .0000
	0.4	+ .0038	+ .0002	+ .0001	+ .0000	- .0001	- .0001	- .0001	+ .0000	+ .0000	+ .0000	+ .0000	+ .0000	+ .0000
	0.2	+ .0458	+ .0017	+ .0007	+ .0000	- .0005	- .0007	- .0008	+ .0003	+ .0001	- .0000	- .0001	- .0002	- .0002
	0	+ .0370	0	+ .0001	+ .0002	+ .0004	+ .0004	+ .0005	0	+ .0005	+ .0012	+ .0018	+ .0022	+ .0023
	$R_x \searrow R_y$		+ .0370	+ .0173	+ .0509	+ .0719	+ .0838	+ .0883						
$a/b = 1/4$	1.0	- .0003	- .0000	- .0000	+ .0000	+ .0000	+ .0000	+ .0000	0	0	0	0	0	0
	0.8	- .0004	+ .0000	+ .0000	+ .0000	+ .0000	- .0000	- .0000	+ .0000	+ .0000	+ .0000	+ .0000	+ .0000	+ .0000
	0.6	+ .0004	+ .0002	+ .0002	+ .0001	- .0001	- .0001	- .0002	+ .0000	+ .0001	+ .0001	+ .0001	+ .0001	+ .0001
	0.4	+ .0127	+ .0014	+ .0007	+ .0001	- .0004	- .0006	- .0007	+ .0003	+ .0002	+ .0001	+ .0001	+ .0000	+ .0000
	0.2	+ .0693	+ .0040	+ .0013	- .0003	- .0012	- .0016	- .0018	+ .0008	+ .0001	- .0006	- .0012	- .0015	- .0016
	0	+ .0297	0	+ .0003	+ .0006	+ .0009	+ .0011	+ .0012	0	+ .0014	+ .0032	+ .0046	+ .0055	+ .0058
	$R_x \searrow R_y$		+ .0297	+ .0415	+ .0868	+ .1127	+ .1256	+ .1296						
$a/b = 3/8$	1.0	- .0022	- .0000	+ .0000	+ .0000	+ .0000	- .0000	- .0001	0	0	0	0	0	0
	0.8	+ .0002	+ .0003	+ .0002	+ .0001	- .0001	- .0002	- .0002	+ .0001	+ .0001	+ .0001	+ .0001	+ .0002	+ .0002
	0.6	+ .0036	+ .0010	+ .0006	+ .0001	- .0002	- .0005	- .0006	+ .0002	+ .0002	+ .0002	+ .0002	+ .0002	+ .0002
	0.4	+ .0216	+ .0028	+ .0012	- .0000	- .0008	- .0012	- .0013	+ .0006	+ .0003	- .0000	- .0003	- .0005	- .0005
	0.2	+ .0788	+ .0051	+ .0011	- .0008	- .0016	- .0018	- .0019	+ .0010	- .0003	- .0014	- .0022	- .0027	- .0029
	0	+ .0228	0	+ .0004	+ .0009	+ .0013	+ .0015	+ .0016	0	+ .0020	+ .0044	+ .0063	+ .0075	+ .0078
	$R_x \searrow R_y$		+ .0228	+ .0615	+ .1076	+ .1314	+ .1428	+ .1461						
$a/b = 1/2$	1.0	- .0041	+ .0002	+ .0003	+ .0001	- .0001	- .0002	- .0003	0	0	0	0	0	0
	0.8	+ .0024	+ .0008	+ .0005	+ .0001	- .0002	- .0004	- .0005	+ .0002	+ .0001	+ .0002	+ .0002	+ .0002	+ .0002
	0.6	+ .0074	+ .0018	+ .0009	+ .0001	- .0005	- .0008	- .0009	+ .0004	+ .0003	+ .0002	+ .0001	- .0000	- .0000
	0.4	+ .0258	+ .0036	+ .0012	- .0003	- .0010	- .0014	- .0015	+ .0007	+ .0002	- .0004	- .0008	- .0012	- .0013
	0.2	+ .0769	+ .0050	+ .0004	- .0011	- .0015	- .0018	- .0015	+ .0010	- .0007	- .0020	- .0028	- .0032	- .0033
	0	+ .0203	0	+ .0006	+ .0013	+ .0017	+ .0019	+ .0020	0	+ .0031	+ .0063	+ .0085	+ .0097	+ .0101
	$R_x \searrow R_y$		+ .0203	+ .0811	+ .1252	+ .1449	+ .1532	+ .1555						
$a/b = 3/4$	1.0	- .0032	+ .0013	+ .0009	+ .0002	- .0004	- .0009	- .0010	0	0	0	0	0	0
	0.8	+ .0068	+ .0021	+ .0010	+ .0001	- .0006	- .0010	- .0011	+ .0004	+ .0003	+ .0001	- .0000	- .0001	- .0001
	0.6	+ .0112	+ .0029	+ .0011	- .0001	- .0008	- .0012	- .0013	+ .0005	+ .0003	- .0001	- .0004	- .0007	- .0007
	0.4	+ .0270	+ .0040	+ .0008	- .0007	- .0012	- .0013	- .0014	+ .0008	- .0001	- .0010	- .0016	- .0020	- .0021
	0.2	+ .0733	+ .0042	- .0004	- .0012	- .0012	- .0010	- .0010	+ .0008	- .0015	- .0026	- .0029	- .0030	- .0030
	0	+ .0214	0	+ .0010	+ .0018	+ .0023	+ .0025	+ .0025	0	+ .0052	+ .0092	+ .0113	+ .0124	+ .0127
	$R_x \searrow R_y$		+ .0214	+ .1090	+ .1446	+ .1568	+ .1612	+ .1623						
$a/b = 1$	1.0	+ .0007	+ .0026	+ .0013	+ .0001	- .0008	- .0012	- .0014	0	0	0	0	0	0
	0.8	+ .0096	+ .0030	+ .0012	- .0001	- .0008	- .0012	- .0013	+ .0006	+ .0003	+ .0000	- .0002	- .0003	- .0004
	0.6	+ .0119	+ .0034	+ .0010	- .0004	- .0010	- .0012	- .0012	+ .0007	+ .0002	- .0003	- .0008	- .0010	- .0011
	0.4	+ .0254	+ .0039	+ .0003	- .0008	- .0011	- .0011	- .0011	+ .0008	- .0004	- .0014	- .0019	- .0021	- .0021
	0.2	+ .0726	+ .0034	- .0008	- .0010	- .0008	- .0007	- .0007	+ .0007	- .0019	- .0026	- .0025	- .0022	- .0022
	0	+ .0257	0	+ .0014	+ .0022	+ .0026	+ .0028	+ .0029	0	+ .0071	+ .0111	+ .0132	+ .0141	+ .0144
	$R_x \searrow R_y$		+ .0257	+ .1258	+ .1535	+ .1615	+ .1643	+ .1651						
$a/b = 3/2$	1.0	+ .0063	+ .0038	+ .0012	- .0004	- .0010	- .0011	- .0012	0	0	0	0	0	0
	0.8	+ .0118	+ .0037	+ .0009	- .0004	- .0009	- .0010	- .0010	+ .0007	+ .0003	- .0001	- .0003	- .0004	- .0004
	0.6	+ .0107	+ .0035	+ .0004	- .0006	- .0008	- .0008	- .0008	+ .0007	+ .0000	- .0006	- .0008	- .0009	- .0009
	0.4	+ .0216	+ .0033	- .0003	- .0008	- .0008	- .0007	- .0006	+ .0007	+ .0009	- .0015	- .0016	- .0015	- .0014
	0.2	+ .0789	+ .0023	- .0009	- .0007	- .0004	- .0003	- .0002	+ .0005	- .0022	- .0019	- .0012	- .0008	- .0006
	0	+ .0352	0	+ .0019	+ .0027	+ .0031	+ .0033	+ .0033	0	+ .0097	+ .0137	+ .0155	+ .0164	+ .0166
	$R_x \searrow R_y$		+ .0352	+ .1434	+ .1609	+ .1653	+ .1668	+ .1671						

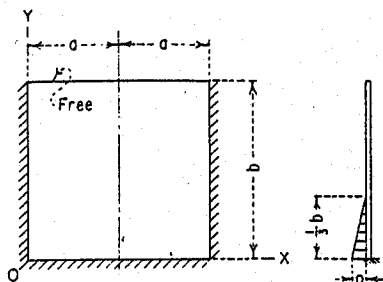


Moment = (Coefficient)(pb²)
Reaction = (Coefficient)(pb)



POSITIVE SIGN CONVENTION

FIGURE 6 - Plate fixed along three edges, moment and reaction coefficients, Load VI, 1/3 uniformly varying load.

	y/b	x/a	M_x						M_y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	-0.0000	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	0	0	0	0	0	0
	0.8	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.4	-0.0003	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.2	+0.0115	+0.0004	+0.0002	+0.0000	-0.0001	-0.0002	-0.0002	+0.0001	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0	+0.0235	0	+0.0001	+0.0002	+0.0002	+0.0003	+0.0003	0	+0.0003	+0.0008	+0.0011	+0.0014	+0.0014
	R_x	R_y	+0.0235	+0.0207	+0.0430	+0.0559	+0.0624	+0.0650						
$a/b = 1/4$	1.0	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	0	0	0	0	0	0
	0.8	-0.0001	-0.0000	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	-0.0001	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.4	+0.0009	+0.0002	+0.0001	+0.0000	-0.0000	-0.0001	-0.0001	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.2	+0.0174	+0.0009	+0.0003	-0.0001	-0.0002	-0.0003	-0.0004	+0.0002	+0.0001	-0.0001	-0.0001	-0.0002	-0.0002
	0	+0.0214	0	+0.0002	+0.0003	+0.0004	+0.0005	+0.0005	0	+0.0008	+0.0016	+0.0021	+0.0024	+0.0025
	R_x	R_y	+0.0214	+0.0406	+0.0623	+0.0720	+0.0759	+0.0771						
$a/b = 3/8$	1.0	-0.0004	-0.0000	-0.0000	+0.0000	+0.0000	-0.0000	-0.0000	0	0	0	0	0	0
	0.8	-0.0001	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0001
	0.6	+0.0004	+0.0002	+0.0001	+0.0000	-0.0000	-0.0001	-0.0001	+0.0000	+0.0000	+0.0000	+0.0001	+0.0001	+0.0001
	0.4	+0.0028	+0.0005	+0.0002	+0.0000	-0.0001	-0.0002	-0.0003	+0.0001	+0.0001	+0.0001	+0.0000	-0.0000	-0.0000
	0.2	+0.0219	+0.0013	+0.0003	-0.0002	-0.0004	-0.0004	-0.0004	+0.0003	+0.0000	-0.0002	-0.0004	-0.0005	-0.0006
	0	+0.0196	0	+0.0002	+0.0003	+0.0004	+0.0005	+0.0005	0	+0.0008	+0.0016	+0.0022	+0.0026	+0.0027
	R_x	R_y	+0.0196	+0.0516	+0.0685	+0.0758	+0.0789	+0.0797						
$a/b = 1/2$	1.0	-0.0008	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000	0	0	0	0	0	0
	0.8	+0.0003	+0.0001	+0.0001	+0.0000	-0.0000	-0.0001	-0.0001	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	+0.0010	+0.0003	+0.0002	+0.0000	-0.0001	-0.0001	-0.0002	+0.0001	+0.0001	+0.0000	+0.0000	+0.0000	+0.0000
	0.4	+0.0036	+0.0007	+0.0003	-0.0000	-0.0002	-0.0003	-0.0003	+0.0001	+0.0001	-0.0000	-0.0001	-0.0001	-0.0002
	0.2	+0.0214	+0.0012	+0.0001	-0.0003	-0.0003	-0.0003	-0.0003	+0.0002	-0.0001	-0.0004	-0.0006	-0.0007	-0.0007
	0	+0.0202	0	+0.0002	+0.0004	+0.0006	+0.0006	+0.0006	0	+0.0011	+0.0022	+0.0028	+0.0031	+0.0032
	R_x	R_y	+0.0202	+0.0594	+0.0740	+0.0792	+0.0811	+0.0816						
$a/b = 3/4$	1.0	-0.0008	+0.0002	+0.0002	+0.0000	-0.0001	-0.0001	-0.0002	0	0	0	0	0	0
	0.8	+0.0010	+0.0003	+0.0002	+0.0000	-0.0001	-0.0002	-0.0002	+0.0001	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000
	0.6	+0.0017	+0.0005	+0.0002	-0.0000	-0.0001	-0.0002	-0.0002	+0.0001	+0.0001	+0.0000	-0.0000	-0.0001	-0.0001
	0.4	+0.0039	+0.0008	+0.0002	-0.0001	-0.0002	-0.0002	-0.0002	+0.0002	+0.0000	-0.0001	-0.0002	-0.0003	-0.0003
	0.2	+0.0206	+0.0010	-0.0001	-0.0003	-0.0003	-0.0002	-0.0002	+0.0002	-0.0003	-0.0005	-0.0006	-0.0007	-0.0007
	0	+0.0233	0	+0.0004	+0.0006	+0.0007	+0.0007	+0.0007	0	+0.0019	+0.0029	+0.0034	+0.0036	+0.0037
	R_x	R_y	+0.0233	+0.0690	+0.0791	+0.0817	+0.0825	+0.0827						
$a/b = 1$	1.0	-0.0002	+0.0004	+0.0002	+0.0000	-0.0001	-0.0002	-0.0002	+0.0001	+0.0001	+0.0000	-0.0000	-0.0000	-0.0001
	0.8	+0.0015	+0.0005	+0.0002	-0.0000	-0.0001	-0.0002	-0.0002	+0.0001	+0.0001	-0.0000	-0.0001	-0.0002	-0.0002
	0.6	+0.0019	+0.0006	+0.0002	-0.0001	-0.0002	-0.0002	-0.0002	+0.0001	+0.0001	-0.0000	-0.0001	-0.0002	-0.0003
	0.4	+0.0036	+0.0007	+0.0001	-0.0001	-0.0002	-0.0002	-0.0002	+0.0001	-0.0000	-0.0002	-0.0003	-0.0003	-0.0003
	0.2	+0.0206	+0.0008	-0.0002	-0.0002	-0.0002	-0.0002	-0.0001	+0.0002	-0.0004	-0.0006	-0.0006	-0.0005	-0.0005
	0	+0.0270	0	+0.0005	+0.0007	+0.0008	+0.0008	+0.0008	0	+0.0023	+0.0033	+0.0038	+0.0039	+0.0040
	R_x	R_y	+0.0270	+0.0740	+0.0811	+0.0826	+0.0830	+0.0831						
$a/b = 3/2$	1.0	+0.0007	+0.0006	+0.0002	-0.0001	-0.0002	-0.0002	-0.0002	0	0	0	0	0	0
	0.8	+0.0019	+0.0006	+0.0001	-0.0001	-0.0001	-0.0002	-0.0002	+0.0001	+0.0000	-0.0000	-0.0000	-0.0001	-0.0001
	0.6	+0.0017	+0.0006	+0.0001	-0.0001	-0.0001	-0.0001	-0.0001	+0.0001	+0.0000	-0.0001	-0.0001	-0.0001	-0.0001
	0.4	+0.0028	+0.0006	-0.0001	-0.0001	-0.0001	-0.0001	-0.0001	+0.0001	-0.0001	-0.0002	-0.0002	-0.0002	-0.0002
	0.2	+0.0228	+0.0005	-0.0002	-0.0002	-0.0001	-0.0001	-0.0001	+0.0001	-0.0005	-0.0005	-0.0004	-0.0003	-0.0003
	0	+0.0352	0	+0.0006	+0.0008	+0.0008	+0.0009	+0.0009	0	+0.0030	+0.0038	+0.0042	+0.0043	+0.0043
	R_x	R_y	+0.0352	+0.0786	+0.0825	+0.0831	+0.0834	+0.0834						

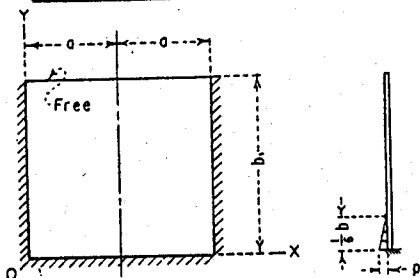

Moment = (Coefficient)(pb^2)
Reaction = (Coefficient)(pb)






FIGURE 7 - Plate fixed along three edges, moment and reaction coefficients, Load VII, 1/6 uniformly varying load.

	y/b	$\frac{x}{a}$	M_x							M_y					
			0	0.2	0.4	0.6	0.8	1.0		0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	R_x	+6.1755	+4.233	+2.932	+2.014	+1.406	+1.058	+0.947	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000
	0.8		-3.0424	-1.024	-0.398	+0.027	+0.299	+0.452	+0.500	-0.205	-0.047	+0.096	+0.208	+0.280	+0.304
	0.6		-0.473	-0.072	-0.047	+0.014	+0.016	+0.037	+0.044	-0.014	-0.016	-0.021	-0.026	-0.029	-0.030
	0.4		+0.0069	-0.001	-0.002	-0.002	+0.000	+0.001	+0.002	-0.000	-0.001	-0.002	-0.003	-0.004	-0.004
	0.2		+0.0006	+0.000	+0.000	-0.000	-0.000	-0.000	-0.000	+0.000	+0.000	-0.000	-0.000	-0.000	-0.000
	0		+0.0000	0	+0.000	+0.000	+0.000	+0.000	+0.000	0	+0.000	+0.000	+0.000	+0.000	+0.000
		R_y	+0.000	-0.000	-0.000	-0.000	+0.001	+0.001	+0.001						
$a/b = 1/4$	1.0	R_x	+11.3102	+8.269	+4.129	+1.755	+0.432	-0.233	-0.435	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000
	0.8		-5.0373	-2.113	-0.432	+0.373	+0.733	+0.877	+0.914	-0.423	+0.215	+0.849	+1.151	+1.666	+1.773
	0.6		-6.075	-0.707	-0.357	-0.041	+0.193	+0.333	+0.379	-0.141	-0.096	-0.051	-0.007	+0.026	+0.038
	0.4		-0.291	-0.132	-0.092	-0.031	+0.028	+0.069	+0.084	-0.026	-0.032	-0.045	-0.057	-0.066	-0.069
	0.2		+0.0114	-0.013	-0.014	-0.008	+0.000	+0.007	+0.010	-0.003	-0.007	-0.014	-0.021	-0.026	-0.028
	0		+0.0051	0	+0.000	-0.000	-0.001	-0.001	-0.001	0	+0.001	-0.000	-0.003	-0.005	-0.006
		R_y	+0.0051	+0.001	+0.006	+0.008	+0.008	+0.016	+0.010						
$a/b = 3/8$	1.0	R_x	+14.6908	+11.461	+4.532	+1.309	-0.194	-0.856	-1.043	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000
	0.8		-5.6047	-1.840	+0.279	+0.825	+0.850	+0.767	+0.727	-0.368	+0.867	+2.039	+2.901	+3.411	+3.578
	0.6		-1.4017	-1.521	-0.544	+0.106	+0.481	+0.665	+0.720	-0.304	-0.070	+0.220	+0.490	+0.676	+0.743
	0.4		-3.181	-0.623	-0.331	-0.049	+0.167	+0.299	+0.343	-0.125	-0.094	-0.067	-0.037	-0.013	-0.003
	0.2		+0.0070	-0.141	-0.107	-0.040	+0.026	+0.071	+0.086	-0.028	-0.044	-0.070	-0.093	-0.108	-0.113
	0		+0.0423	0	-0.0003	-0.014	-0.028	-0.039	-0.044	0	-0.016	-0.071	-0.141	-0.197	-0.218
		R_y	+0.0423	+0.075	+0.207	-0.593	-1.206	-1.433							
$a/b = 1/2$	1.0	R_x	+16.8462	+13.643	+4.497	+0.934	-0.518	-1.103	-1.262	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000
	0.8		-5.5284	-0.776	+1.137	+1.119	+0.749	+0.463	+0.362	-0.155	+1.650	+3.201	+4.235	+4.805	+4.985
	0.6		-1.9016	-1.823	-0.325	+0.393	+0.667	+0.744	+0.757	-0.365	+0.150	+0.787	+1.345	+1.710	+1.835
	0.4		-6.544	-1.073	-0.424	+0.048	+0.332	+0.473	+0.515	-0.215	-0.082	+0.088	+0.259	+0.384	+0.429
	0.2		-0.0091	-0.300	-0.187	-0.042	+0.065	+0.124	+0.142	-0.060	-0.088	-0.120	-0.139	-0.147	-0.149
	0		+0.0985	0	-0.0014	-0.056	-0.102	-0.136	-0.149	0	-0.072	-0.279	-0.511	-0.681	-0.743
		R_y	+0.0985	+1.413	-0.567	-2.627	-4.024	-4.506							
$a/b = 3/4$	1.0	R_x	+19.3123	+16.292	+4.248	+0.554	-0.813	-1.371	-1.528	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000
	0.8		-4.9334	+2.073	+2.534	+1.309	+0.345	-0.193	-0.363	+0.415	+3.154	+5.006	+6.026	+6.521	+6.669
	0.6		-2.1142	-0.937	+0.767	+0.923	+0.631	+0.354	+0.250	-0.187	+0.936	+2.172	+3.097	+3.637	+3.811
	0.4		-9.946	-1.049	+0.052	+0.434	+0.449	+0.367	+0.326	-0.210	+0.219	+0.788	+1.296	+1.628	+1.741
	0.2		-1.100	-0.387	-0.073	+0.090	+0.117	+0.096	+0.083	-0.077	-0.061	+0.020	+0.130	+0.217	+0.249
	0		+0.1491	0	-0.0054	-0.138	-0.195	-0.222	-0.229	0	-0.271	-0.689	-0.977	-1.111	-1.145
		R_y	+0.1491	+1.491	-0.424	-4.227	-6.344	-7.143	-7.315						
$a/b = 1$	1.0	R_x	+20.8157	+17.779	+4.269	-1.598	-2.961	-3.543	-3.712	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000
	0.8		-4.4625	+4.653	+3.317	+1.241	-0.007	-0.631	-0.819	+0.931	+4.346	+6.176	+7.031	+7.408	+7.515
	0.6		-1.9908	+0.543	+1.755	+1.153	+0.420	-0.044	-0.196	+0.109	+1.828	+3.423	+4.443	+4.975	+5.138
	0.4		-1.1509	-0.490	+0.715	+0.727	+0.431	+0.193	+0.110	-0.098	+0.728	+1.714	+2.487	+2.949	+3.101
	0.2		-2.816	-0.306	+0.179	+0.262	+0.215	+0.172	+0.158	-0.061	+0.155	+0.568	+1.011	+1.338	+1.457
	0		+0.1323	0	-0.0096	-0.122	-0.064	+0.008	+0.039	0	-0.480	-0.610	-0.321	+0.040	+0.0193
		R_y	+0.1323	-4.370	-7.216	-6.791	-5.624	-5.103							
$a/b = 3/2$	1.0	R_x	+22.7458	+17.980	+3.202	+0.139	-0.768	-1.026	-1.074	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000
	0.8		-4.4642	+7.153	+3.297	+0.851	-0.108	-0.413	-0.474	+1.431	+5.856	+7.500	+8.133	+8.395	+8.469
	0.6		-1.7648	+2.470	+2.360	+1.043	+0.345	+0.109	+0.063	+0.494	+3.354	+5.308	+6.348	+6.857	+7.012
	0.4		-1.3017	+0.457	+1.333	+0.872	+0.573	+0.498	+0.494	+0.091	+1.882	+3.610	+4.819	+5.524	+5.757
	0.2		-5.548	-0.061	+0.486	+0.523	+0.618	+0.737	+0.787	-0.012	+0.852	+2.247	+3.596	+4.521	+4.846
	0		+0.0256	0	-0.103	+0.169	+0.536	+0.801	+0.894	0	-0.515	+0.846	+2.679	+4.003	+4.469
		R_y	+0.0256	-9.662	-7.706	-3.660	-1.029	-0.180							



$$\text{Moment} = (\text{Coefficient})(M)$$


$$\text{Reaction} = (\text{Coefficient})\left(\frac{M}{b}\right)$$



POSITIVE SIGN CONVENTION

FIGURE 8 - Plate fixed along three edges, moment and reaction coefficients, Load VIII, moment at free edge.

		M_x							M_y							
		y/b	R_x	x/a	0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$		1.0	+1.2422	+0.471	+0.0203	+0.007	-0.0126	-0.0204	-0.0230	0	0	0	0	0	0	0
		0.8	+0.0073	+0.0025	+0.0018	+0.0006	-0.0005	-0.0013	-0.0015	+0.0005	+0.0007	+0.0011	+0.0014	+0.0017	+0.0018	+0.0018
		0.6	-0.0031	+0.0000	+0.0000	+0.0001	-0.0000	+0.0000	-0.0000	+0.0000	+0.0000	+0.0001	+0.0001	+0.0001	+0.0001	+0.0002
		0.4	+0.0005	-0.0000	-0.0000	+0.0000	-0.0000	+0.0000	+0.0000	-0.0000	-0.0000	+0.0000	-0.0000	+0.0000	+0.0000	+0.0000
		0.2	+0.0000	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000
		0	+0.0000	0	+0.0000	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	0	+0.0000	-0.0000	-0.0000	-0.0000	-0.0000
		R_x	R_y	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	-0.0000							
$a/b = 1/4$		1.0	+2.3750	+0.1522	+0.0587	-0.0018	-0.0395	-0.0601	-0.0667	0	0	0	0	0	0	0
		0.8	+0.1072	+0.0278	+0.0175	+0.0050	-0.0058	-0.0129	-0.0154	+0.0056	+0.0067	+0.0091	+0.0115	+0.0131	+0.0136	+0.0136
		0.6	-0.0306	+0.0024	+0.0027	+0.0015	-0.0002	-0.0015	-0.0019	+0.0005	+0.0012	+0.0024	+0.0035	+0.0043	+0.0046	+0.0046
		0.4	-0.0120	-0.0003	+0.0001	+0.0002	+0.0002	+0.0001	+0.0001	-0.0001	-0.0001	+0.0004	+0.0006	+0.0008	+0.0009	+0.0009
		0.2	-0.0020	-0.0002	-0.0001	+0.0000	+0.0001	+0.0001	+0.0001	-0.0000	-0.0000	+0.0000	+0.0001	+0.0001	+0.0001	+0.0001
		0	+0.0002	0	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	0	-0.0000	-0.0001	-0.0001	-0.0001	-0.0001	-0.0001
		R_x	R_y	+0.0002	+0.0005	-0.0004	-0.0011	-0.0013	-0.0017							
$a/b = 3/8$		1.0	+3.3048	+0.2723	+0.0947	-0.0084	-0.0681	-0.0996	-0.1094	0	0	0	0	0	0	0
		0.8	+0.3317	+0.0857	+0.0482	+0.0103	-0.0190	-0.0370	-0.0431	+0.0171	+0.0185	+0.0226	+0.0261	+0.0284	+0.0291	+0.0291
		0.6	-0.0370	+0.0189	+0.0154	+0.0064	-0.0031	-0.0099	-0.0123	+0.0038	+0.0064	+0.0107	+0.0147	+0.0174	+0.0184	+0.0184
		0.4	-0.0433	+0.0020	+0.0034	+0.0023	+0.0003	-0.0015	-0.0021	+0.0004	+0.0017	+0.0036	+0.0056	+0.0070	+0.0075	+0.0075
		0.2	-0.0150	-0.0004	+0.0004	+0.0006	+0.0004	+0.0001	-0.0000	-0.0001	+0.0003	+0.0010	+0.0017	+0.0022	+0.0022	+0.0024
		0	-0.0006	0	-0.0000	-0.0001	-0.0001	-0.0000	-0.0000	0	-0.0002	-0.0003	-0.0003	-0.0002	-0.0002	-0.0002
		R_x	R_y	-0.0006	-0.0032	-0.0087	-0.0101	-0.0095	-0.0091							
$a/b = 1/2$		1.0	+4.0661	+0.3938	+0.1268	-0.0162	-0.0957	-0.1369	-0.1497	0	0	0	0	0	0	0
		0.8	+0.6108	+0.1656	+0.0846	+0.0132	-0.0376	-0.0672	-0.0769	+0.0331	+0.0330	+0.0366	+0.0393	+0.0407	+0.0412	+0.0412
		0.6	+0.0095	+0.0555	+0.0391	+0.0130	-0.0109	-0.0268	-0.0324	+0.0111	+0.0161	+0.0238	+0.0306	+0.0349	+0.0364	+0.0364
		0.4	-0.0659	+0.0139	+0.0140	+0.0071	-0.0015	-0.0079	-0.0103	+0.0028	+0.0063	+0.0117	+0.0169	+0.0205	+0.0218	+0.0218
		0.2	-0.0470	+0.0012	+0.0036	+0.0028	+0.0009	-0.0008	-0.0014	+0.0002	+0.0022	+0.0053	+0.0085	+0.0107	+0.0116	+0.0116
		0	-0.0139	0	-0.0001	+0.0003	+0.0009	+0.0014	+0.0016	0	-0.0004	+0.0013	+0.0043	+0.0071	+0.0082	+0.0082
		R_x	R_y	-0.0139	-0.0341	-0.0344	-0.0141	+0.0069	+0.0154							
$a/b = 3/4$		1.0	+5.2885	+0.6266	+0.1803	-0.0331	-0.1463	-0.2036	-0.2213	0	0	0	0	0	0	0
		0.8	+1.1657	+0.3486	+0.1514	+0.0098	-0.0788	-0.1268	-0.1420	+0.0697	+0.0618	+0.0591	+0.0568	+0.0551	+0.0544	+0.0544
		0.6	+0.1509	+0.1613	+0.0957	+0.0218	-0.0346	-0.0682	-0.0791	+0.0323	+0.0421	+0.0546	+0.0633	+0.0679	+0.0694	+0.0694
		0.4	-0.1083	+0.0588	+0.0481	+0.0188	-0.0088	-0.0267	-0.0327	+0.0118	+0.0240	+0.0408	+0.0548	+0.0636	+0.0666	+0.0666
		0.2	-0.1770	+0.0096	+0.0170	+0.0116	+0.0050	+0.0009	-0.0005	+0.0019	+0.0146	+0.0328	+0.0503	+0.0627	+0.0672	+0.0672
		0	-0.0495	0	+0.0003	+0.0050	+0.0115	+0.0168	+0.0187	0	+0.0013	+0.0250	+0.0577	+0.0839	+0.0937	+0.0937
		R_x	R_y	-0.0495	-0.1823	-0.0848	+0.0815	+0.2120	+0.2598							
$a/b = 1$		1.0	+6.2523	+0.8094	+0.2040	-0.0548	-0.1818	-0.2421	-0.2601	0	0	0	0	0	0	0
		0.8	+1.5675	+0.5022	+0.1866	-0.0041	-0.1093	-0.1611	-0.1766	+0.1004	+0.0834	+0.0746	+0.0688	+0.0655	+0.0644	+0.0644
		0.6	+0.2160	+0.2571	+0.1333	+0.0199	-0.0529	-0.0906	-0.1021	+0.0514	+0.0697	+0.0873	+0.0978	+0.1030	+0.1046	+0.1046
		0.4	-0.1974	+0.1018	+0.0760	+0.0255	-0.0117	-0.0314	-0.0372	+0.0204	+0.0500	+0.0848	+0.1122	+0.1291	+0.1349	+0.1349
		0.2	-0.3370	+0.0189	+0.0304	+0.0218	+0.0168	+0.0158	+0.0160	+0.0038	+0.0381	+0.0860	+0.1321	+0.1547	+0.1764	+0.1764
		0	-0.1014	0	+0.0020	+0.0169	+0.0346	+0.0476	+0.0523	0	+0.0100	+0.0843	+0.1728	+0.2379	+0.2614	+0.2614
		R_x	R_y	-0.1014	-0.3394	-0.0539	+0.2910	+0.5246	+0.6042							
$a/b = 3/2$		1.0	+7.3629	+0.9388	+0.1505	-0.1029	-0.1904	-0.2162	-0.2210	0	0	0	0	0	0	0
		0.8	+1.8569	+0.6296	+0.1579	-0.0437	-0.1174	-0.1386	-0.1423	+0.1259	+0.1034	+0.0968	+0.0968	+0.0990	+0.1001	+0.1001
		0.6	+0.1702	+0.3478	+0.1299	-0.0015	-0.0515	-0.0639	-0.0654	+0.0696	+0.1150	+0.1507	+0.1765	+0.1936	+0.1997	+0.1997
		0.4	-0.3603	+0.1483	+0.0862	+0.0257	+0.0062	+0.0058	+0.0075	+0.0297	+0.1080	+0.1878	+0.2516	+0.2931	+0.3076	+0.3076
		0.2	-0.5823	+0.0330	+0.0427	+0.0420	+0.0546	+0.0673	+0.0722	+0.0066	+0.0996	+0.2246	+0.3374	+0.4121	+0.4378	+0.4378
		0	-0.1985	0	+0.0125	+0.0532	+0.0908	+0.1144	+0.1223	0	+0.0623	+0.2658	+0.4538	+0.5722	+0.6117	+0.6117
		R_y	-0.1985	-0.3944	+0.2295	+0.7018	+0.9426	+1.0130								

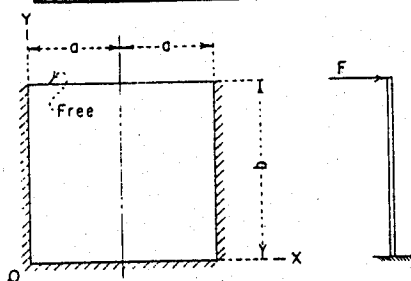

Moment : (Coefficient)(Fb)
Reaction : (Coefficient)(F)





FIGURE 9 - Plate fixed along three edges, moment and reaction coefficients, Load IX, line load at free edge.

	y/b	$x/a \rightarrow$	M_x						M_y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	$R_x \searrow R_y$		+0.063	+0.089	+0.096	+0.117	+0.120	+0.129						
	1.0	+0.063	0	0	0	0	0	0	0	0	0	0	0	0
	0.8	+0.1242	+0.049	+0.021	+0.001	-0.013	-0.022	-0.025	+0.010	+0.004	-0.001	-0.004	-0.006	-0.007
	0.6	+0.1254	+0.052	+0.023	+0.002	-0.014	-0.023	-0.027	+0.010	+0.005	+0.000	-0.003	-0.005	-0.006
	0.4	+0.1253	+0.051	+0.023	+0.002	-0.014	-0.023	-0.027	+0.010	+0.005	+0.000	-0.003	-0.005	-0.006
	0.2	+0.1185	+0.048	+0.021	+0.001	-0.013	-0.021	-0.025	+0.010	+0.004	-0.001	-0.004	-0.006	-0.007
$a/b = 1/4$	0	+0.0504	0	+0.001	+0.003	+0.005	+0.006	+0.007	0	+0.006	+0.016	+0.025	+0.031	+0.033
	$R_y \rightarrow$	+0.0104	+0.0120	+0.0163	+0.021	+0.027	+0.034	+0.041						
	$R_x \searrow R_y$	-0.0097	+0.0412	+0.1053	+0.1482	+0.1728	+0.1808							
	1.0	-0.0097	0	0	0	0	0	0	0	0	0	0	0	0
	0.8	+0.2366	+0.0165	+0.0067	-0.0002	-0.0047	-0.0073	-0.0081	+0.0033	+0.009	-0.0011	-0.0026	-0.0036	-0.0039
	0.6	+0.2557	+0.0201	+0.0088	+0.003	-0.0058	-0.0091	-0.0102	+0.0040	+0.016	-0.0003	-0.0018	-0.0027	-0.0030
$a/b = 3/8$	0.4	+0.2530	+0.0196	+0.0085	+0.0002	-0.0055	-0.0088	-0.0099	+0.0039	+0.015	-0.0004	-0.0019	-0.0029	-0.0032
	0.2	+0.1908	+0.0138	+0.0053	-0.0003	-0.0039	-0.0059	-0.0066	+0.0028	+0.007	-0.0011	-0.0024	-0.0032	-0.0035
	0	+0.0295	0	+0.005	+0.013	+0.020	+0.025	+0.027	0	+0.024	+0.063	+0.101	+0.126	+0.135
	$R_y \rightarrow$	+0.0295	+0.0235	+0.1131	+0.1788	+0.2176	+0.2304							
	$R_x \searrow R_y$	-0.0466	+0.0061	+0.1237	+0.1983	+0.2397	+0.2530							
	1.0	-0.0466	0	0	0	0	0	0	0	0	0	0	0	0
$a/b = 1/2$	0.8	+0.3265	+0.0301	+0.0109	-0.0013	-0.0089	-0.0130	-0.0143	+0.0060	+0.008	-0.0038	-0.0073	-0.0095	-0.0102
	0.6	+0.3819	+0.0403	+0.0161	-0.0007	-0.0116	-0.0177	-0.0197	+0.0081	+0.023	-0.0028	-0.0068	-0.0094	-0.0103
	0.4	+0.3624	+0.0374	+0.0148	-0.0008	-0.0108	-0.0163	-0.0181	+0.0075	+0.020	-0.0028	-0.0065	-0.0089	-0.0097
	0.2	+0.2164	+0.0211	+0.0075	-0.0010	-0.0059	-0.0085	-0.0092	+0.0042	+0.008	-0.0019	-0.0038	-0.0048	-0.0052
	0	-0.0013	0	+0.010	+0.027	+0.043	+0.054	+0.058	0	+0.051	+0.135	+0.215	+0.269	+0.288
	$R_y \rightarrow$	-0.0013	+0.0310	+0.1684	+0.2663	+0.3238	+0.3427							
$a/b = 3/4$	$R_x \searrow R_y$	-0.0902	-0.0050	+0.1570	+0.2529	+0.3034	+0.3192							
	1.0	-0.0902	0	0	0	0	0	0	0	0	0	0	0	0
	0.8	+0.3904	+0.0412	+0.0128	-0.0035	-0.0126	-0.0172	-0.0186	+0.0082	-0.0005	-0.0083	-0.0143	-0.0180	-0.0192
	0.6	+0.4751	+0.0572	+0.0197	-0.0036	-0.0172	-0.0242	-0.0263	+0.0114	+0.013	-0.0083	-0.0159	-0.0207	-0.0224
	0.4	+0.4302	+0.0508	+0.0173	-0.0033	-0.0152	-0.0212	-0.0230	+0.0102	+0.011	-0.0072	-0.0137	-0.0177	-0.0191
	0.2	+0.2047	+0.0246	+0.0078	-0.0017	-0.0065	-0.0086	-0.0092	+0.0049	+0.009	-0.0017	-0.0030	-0.0036	-0.0037
$a/b = 1$	0	-0.0270	0	+0.019	+0.050	+0.078	+0.096	+0.102	0	+0.094	+0.248	+0.388	+0.480	+0.512
	$R_y \rightarrow$	-0.0270	+0.0571	+0.2350	+0.3590	+0.4297	+0.4525							
	$R_x \searrow R_y$	-0.1465	+0.0482	+0.2410	+0.3343	+0.3758	+0.3874							
	1.0	-0.1465	0	0	0	0	0	0	0	0	0	0	0	0
	0.8	+0.4416	+0.0490	+0.0086	-0.0090	-0.0163	-0.0189	-0.0196	+0.0098	-0.0060	-0.0197	-0.0296	-0.0354	-0.0373
	0.6	+0.5465	+0.0695	+0.0142	-0.0116	-0.0225	-0.0265	-0.0274	+0.0139	-0.0054	-0.0233	-0.0366	-0.0447	-0.0473
$a/b = 3/2$	0.4	+0.4698	+0.0594	+0.0121	-0.0097	-0.0185	-0.0214	-0.0221	+0.0119	-0.0039	-0.0177	-0.0277	-0.0334	-0.0353
	0.2	+0.1759	+0.0257	+0.0053	-0.0029	-0.0051	-0.0052	-0.0050	+0.0051	+0.0013	+0.0009	+0.0021	+0.0034	+0.0040
	0	-0.0530	0	+0.0041	+0.0098	+0.0144	+0.0171	+0.0180	0	+0.0207	+0.0492	+0.0719	+0.0854	+0.0898
	$R_y \rightarrow$	-0.0530	+0.1403	+0.3658	+0.4989	+0.5644	+0.5837							
	$R_x \searrow R_y$	-0.1593	+0.1304	+0.3059	+0.3709	+0.3922	+0.3969							
	1.0	-0.1593	0	0	0	0	0	0	0	0	0	0	0	0
$a/b = 2$	0.8	+0.4456	+0.0465	+0.0014	-0.0129	-0.0164	-0.0166	-0.0164	+0.0093	-0.0125	-0.0294	-0.0403	-0.0461	-0.0479
	0.6	+0.5491	+0.0664	+0.0037	-0.0174	-0.0225	-0.0227	-0.0224	+0.0133	-0.0137	-0.0363	-0.0512	-0.0592	-0.0617
	0.4	+0.4658	+0.0562	+0.0031	-0.0142	-0.0176	-0.0172	-0.0168	+0.0112	-0.0101	-0.0265	-0.0367	-0.0418	-0.0434
	0.2	+0.1622	+0.0237	+0.0018	-0.0033	-0.0027	-0.0014	-0.0008	+0.0047	+0.0015	+0.0035	+0.0069	+0.0095	+0.0104
	0	-0.0584	0	+0.0067	+0.0139	+0.0187	+0.0211	+0.0219	0	+0.0334	+0.0697	+0.0934	+0.1056	+0.1093
	$R_y \rightarrow$	-0.0584	+0.2379	+0.4659	+0.5707	+0.6115	+0.6218							
$a/b = 3$	$R_x \searrow R_y$	-0.1387	+0.2509	+0.3666	+0.3870	+0.3870	+0.3859							
	1.0	-0.1387	0	0	0	0	0	0	0	0	0	0	0	0
	0.8	+0.4395	+0.0368	-0.0086	-0.0152	-0.0143	-0.0129	-0.0124	+0.0074	-0.0238	-0.0420	-0.0505	-0.0538	-0.0547
	0.6	+0.5302	+0.0531	-0.0110	-0.0207	-0.0191	-0.0169	-0.0162	+0.0106	-0.0289	-0.0533	-0.0648	-0.0693	-0.0704
	0.4	+0.4497	+0.0447	-0.0090	-0.0160	-0.0139	-0.0118	-0.0111	+0.0089	-0.0211	-0.0376	-0.0445	-0.0468	-0.0474
	0.2	+0.1588	+0.0184	-0.0020	-0.0018	+0.0007	+0.0021	+0.0026	+0.0037	+0.0028	+0.0082	+0.0125	+0.0147	+0.0153
$a/b = 4$	0	-0.0456	0	+0.0115	+0.0192	+0.0225	+0.0236	+0.0239	0	+0.0576	+0.0959	+0.1123	+0.1180	+0.1194
	$R_y \rightarrow$	-0.0456	+0.3937	+0.5702	+0.6160	+0.6244	+0.6252							

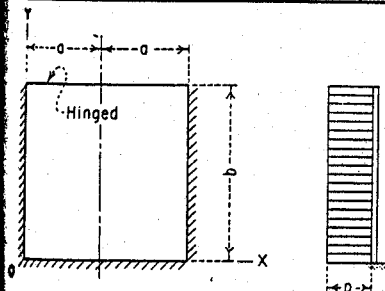

$$\text{Moment} = (\text{Coefficient})(pb^2)$$

$$\text{Reaction} = (\text{Coefficient})(pb)$$






FIGURE 10 - Plate fixed along three edges--Hinged along one edge, moment and reaction coefficients, Load I, uniform load.

	y/b	x/a →	M _x						M _y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
			R _x / R _y											
a/b = 1/8	1.0	0	-0.005	0	0	0	0	0	0	0	0	0	0	0
	0.8	0	+0.0076	+0.005	+0.003	+0.001	-0.001	-0.002	+0.001	+0.001	+0.001	+0.001	+0.001	+0.001
	0.6	0	+0.0967	+0.0039	+0.0017	+0.0001	+0.0011	-0.0017	-0.0020	+0.0008	+0.0003	-0.0000	-0.0003	-0.0004
	0.4	0	+0.1252	+0.0051	+0.0023	+0.0001	-0.0014	-0.0023	-0.0026	+0.0010	+0.0004	-0.0000	-0.0003	-0.0005
	0.2	0	+0.1186	+0.0048	+0.0021	+0.0001	-0.0013	-0.0021	-0.0024	+0.0010	+0.0004	-0.0001	-0.0004	-0.0006
	0	0	+0.0504	0	+0.0001	+0.0003	+0.0005	+0.0006	+0.0007	0	+0.0006	+0.0016	+0.0025	+0.0031
			R _y →	+0.0504	+0.0120	+0.0566	+0.0891	+0.1083	+0.1147					
a/b = 1/4	1.0	0	-0.0067	0	0	0	0	0	0	0	0	0	0	0
	0.8	0	+0.0259	+0.0037	+0.0021	+0.0004	-0.0009	-0.0018	-0.0021	+0.0007	+0.0006	+0.0006	+0.0006	+0.0007
	0.6	0	+0.1889	+0.0142	+0.0060	+0.0001	-0.0040	-0.0063	-0.0071	+0.0028	+0.0010	-0.0005	-0.0016	-0.0023
	0.4	0	+0.2496	+0.0185	+0.0077	-0.0000	-0.0052	-0.0082	-0.0092	+0.0037	+0.0013	-0.0008	-0.0024	-0.0034
	0.2	0	+0.1917	+0.0136	+0.0052	-0.0004	-0.0039	-0.0059	-0.0065	+0.0027	+0.0006	-0.0012	-0.0026	-0.0034
	0	0	+0.0299	0	+0.0005	+0.0013	+0.0020	+0.0025	+0.0027	0	+0.0024	+0.0063	+0.0100	+0.0126
			R _y →	+0.0299	+0.0241	+0.1138	+0.1792	+0.2177	+0.2303					
a/b = 3/8	1.0	0	-0.0266	0	0	0	0	0	0	0	0	0	0	0
	0.8	0	+0.0626	+0.0108	+0.0055	+0.0007	-0.0029	-0.0051	-0.0058	+0.0022	+0.0015	+0.0010	+0.0005	+0.0002
	0.6	0	+0.2728	+0.0277	+0.0109	-0.0006	-0.0080	-0.0121	-0.0135	+0.0055	+0.0014	-0.0023	-0.0051	-0.0068
	0.4	0	+0.3450	+0.0329	+0.0122	-0.0014	-0.0097	-0.0141	-0.0156	+0.0066	+0.0012	-0.0036	-0.0074	-0.0098
	0.2	0	+0.2185	+0.0201	+0.0067	-0.0013	-0.0058	-0.0080	-0.0087	+0.0040	+0.0005	-0.0025	-0.0046	-0.0058
	0	0	+0.0016	0	+0.0010	+0.0026	+0.0041	+0.0051	+0.0055	0	+0.0050	+0.0131	+0.0206	+0.0256
			R _y →	+0.0016	+0.0368	+0.1707	+0.2634	+0.3167	+0.3340					
a/b = 1/2	1.0	0	-0.0552	0	0	0	0	0	0	0	0	0	0	0
	0.8	0	+0.1009	+0.0184	+0.0081	+0.0001	-0.0052	-0.0082	-0.0091	+0.0037	+0.0019	-0.0000	-0.0018	-0.0030
	0.6	0	+0.3350	+0.0390	+0.0133	-0.0025	-0.0117	-0.0165	-0.0180	+0.0078	+0.0006	-0.0060	-0.0112	-0.0144
	0.4	0	+0.3964	+0.0425	+0.0131	-0.0038	-0.0129	-0.0173	-0.0187	+0.0085	-0.0002	-0.0081	-0.0140	-0.0177
	0.2	0	+0.2096	+0.0226	+0.0062	-0.0023	-0.0062	-0.0078	-0.0082	+0.0045	+0.0001	-0.0030	-0.0049	-0.0058
	0	0	-0.0198	0	+0.0018	+0.0046	+0.0070	+0.0086	+0.0091	0	+0.0091	+0.0229	+0.0351	+0.0429
			R _y →	-0.0198	+0.0699	+0.2354	+0.3444	+0.4041	+0.4229					
a/b = 3/4	1.0	0	-0.0982	0	0	0	0	0	0	0	0	0	0	0
	0.8	0	+0.1376	+0.0255	+0.0073	-0.0030	-0.0080	-0.0100	-0.0105	+0.0051	+0.0005	-0.0049	-0.0095	-0.0125
	0.6	0	+0.3850	+0.0472	+0.0096	-0.0079	-0.0153	-0.0180	-0.0187	+0.0094	-0.0040	-0.0161	-0.0250	-0.0304
	0.4	0	+0.4217	+0.0472	+0.0077	-0.0089	-0.0150	-0.0168	-0.0172	+0.0094	-0.0051	-0.0173	-0.0256	-0.0303
	0.2	0	+0.1871	+0.0224	+0.0032	-0.0035	-0.0049	-0.0047	-0.0045	+0.0045	-0.0005	-0.0023	-0.0022	-0.0015
	0	0	-0.0393	0	+0.0038	+0.0085	+0.0121	+0.0142	+0.0148	0	+0.0190	+0.0427	+0.0605	+0.0708
			R _y →	-0.0393	+0.1556	+0.3492	+0.4541	+0.5029	+0.5168					
a/b = 1	1.0	0	-0.1143	0	0	0	0	0	0	0	0	0	0	0
	0.8	0	+0.1415	+0.0254	+0.0034	-0.0057	-0.0083	-0.0086	-0.0086	+0.0051	-0.0021	-0.0098	-0.0157	-0.0191
	0.6	0	+0.3855	+0.0451	+0.0024	-0.0119	-0.0153	-0.0154	-0.0152	+0.0090	-0.0096	-0.0248	-0.0348	-0.0402
	0.4	0	+0.4165	+0.0438	+0.0006	-0.0120	-0.0141	-0.0136	-0.0132	+0.0088	-0.0106	-0.0245	-0.0326	-0.0365
	0.2	0	+0.1766	+0.0201	+0.0001	-0.0037	-0.0030	-0.0018	-0.0014	+0.0040	-0.0011	-0.0010	+0.0009	+0.0026
	0	0	-0.0412	0	+0.0059	+0.0117	+0.0152	+0.0170	+0.0175	0	+0.0297	+0.0585	+0.0762	+0.0850
			R _y →	-0.0412	+0.2427	+0.4284	+0.5063	+0.5347	+0.5416					
a/b = 3/2	1.0	0	-0.1143	0	0	0	0	0	0	0	0	0	0	0
	0.8	0	+0.1308	+0.0212	-0.0029	-0.0075	-0.0071	-0.0062	-0.0059	+0.0042	-0.0074	-0.0168	-0.0219	-0.0241
	0.6	0	+0.3762	+0.0361	-0.0075	-0.0141	-0.0129	-0.0115	-0.0110	+0.0072	-0.0198	-0.0362	-0.0439	-0.0469
	0.4	0	+0.4052	+0.0340	-0.0083	-0.0129	-0.0112	-0.0097	-0.0092	+0.0068	-0.0199	-0.0355	-0.0484	-0.0401
	0.2	0	+0.1778	+0.0151	-0.0028	-0.0023	-0.0004	+0.0007	+0.0010	+0.0030	-0.0011	+0.0018	+0.0046	+0.0061
	0	0	-0.0262	0	+0.0098	+0.0156	+0.0179	+0.0187	+0.0189	0	+0.0489	+0.0779	+0.0896	+0.0935
			R _y →	-0.0262	+0.3699	+0.5053	+0.5372	+0.5425	+0.5429					

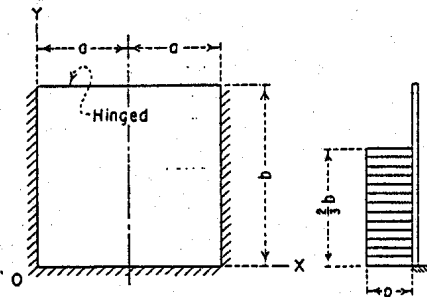

$$\text{Moment} = (\text{Coefficient})(pb^2)$$


$$\text{Reaction} = (\text{Coefficient})(pb)$$



POSITIVE SIGN CONVENTION

FIGURE 11 - Plate fixed along three edges--Hinged along one edge, moment and reaction coefficients, Load II, 2/3 uniform load.

	y/b	$x/a \rightarrow$	M_x						M_y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$		$R_x \searrow R_y$	-.0000	-.0000	-.0000	-.0000	-.0000	-.0000	0	0	0	0	0	0
	1.0		-.0000	0	0	0	0	0	+.0000	+.0000	+.0000	+.0000	+.0000	+.0000
	0.8		-.0001	+.0000	+.0000	+.0000	-.0000	-.0000	+.0000	+.0000	+.0000	+.0000	+.0000	+.0000
	0.6		+.0000	+.0001	+.0001	+.0001	-.0000	-.0000	+.0000	+.0000	+.0000	+.0000	+.0000	+.0000
	0.4		+.0286	+.0013	+.0006	+.0001	-.0003	-.0006	+.0003	+.0001	+.0001	-.0000	-.0000	-.0001
	0.2		+.1108	+.0044	+.0019	+.0000	-.0012	-.0019	+.0009	+.0003	-.0001	-.0005	-.0007	-.0008
	0		+.0507	0	+.0001	+.0003	+.0005	+.0006	0	+.0006	+.0016	+.0025	+.0031	+.0033
$a/b = 1/4$		$R_y \rightarrow$	+.0507	+.0124	+.0570	+.0892	+.1081	+.1143						
		$R_x \searrow R_y$	-.0002	-.0012	-.0008	-.0003	+.0001	+.0002	0	0	0	0	0	0
	1.0		-.0002	0	0	0	0	0	+.0000	+.0001	+.0001	+.0001	+.0002	+.0002
	0.8		-.0008	+.0001	+.0001	+.0001	-.0000	-.0001	+.0002	+.0002	+.0003	+.0004	+.0004	+.0005
	0.6		+.0040	+.0011	+.0007	+.0002	-.0003	-.0006	+.0011	+.0005	+.0000	-.0004	-.0006	-.0007
	0.4		+.0652	+.0055	+.0025	+.0001	-.0015	-.0025	+.0021	+.0001	-.0017	-.0032	-.0040	-.0043
	0.2		+.1703	+.0105	+.0034	-.0008	-.0032	-.0044	0	+.0022	+.0057	+.0087	+.0107	+.0114
$a/b = 3/8$		$R_y \rightarrow$	+.0354	+.0344	+.1161	+.1704	+.2004	+.2099						
		$R_x \searrow R_y$	-.0027	-.0071	-.0032	+.0005	+.0030	+.0039	0	0	0	0	0	0
	1.0		-.0027	0	0	0	0	0	+.0002	+.0003	+.0004	+.0004	+.0005	+.0005
	0.8		+.0019	+.0011	+.0007	+.0002	-.0002	-.0006	+.0021	+.0008	+.0007	+.0006	+.0005	+.0005
	0.6		+.0169	+.0038	+.0021	+.0004	-.0010	-.0018	+.0020	+.0006	-.0008	-.0019	-.0026	-.0029
	0.4		+.0953	+.0100	+.0038	-.0003	-.0029	-.0043	+.0026	-.0008	-.0037	-.0058	-.0070	-.0073
	0.2		+.1896	+.0132	+.0029	-.0019	-.0041	-.0049	0	+.0040	+.0095	+.0141	+.0170	+.0180
$a/b = 1/2$		$R_y \rightarrow$	+.0186	0	+.0008	+.0019	+.0028	+.0034	+.0036					
		$R_x \searrow R_y$	-.0077	-.0136	-.0037	+.0043	+.0093	+.0110						
	1.0		-.0077	0	0	0	0	0	+.0005	+.0005	+.0004	+.0004	+.0003	+.0003
	0.8		+.0082	+.0026	+.0015	+.0003	-.0007	-.0012	+.0013	+.0008	+.0003	-.0002	-.0006	-.0007
	0.6		+.0302	+.0055	+.0031	+.0002	-.0018	-.0029	+.0025	+.0001	-.0022	-.0040	-.0051	-.0055
	0.4		+.1092	+.0124	+.0038	-.0012	-.0038	-.0049	+.0026	-.0019	-.0052	-.0072	-.0081	-.0084
	0.2		+.1849	+.0131	+.0015	-.0027	-.0040	-.0043	0	+.0066	+.0144	+.0202	+.0236	+.0246
$a/b = 3/4$		$R_y \rightarrow$	+.0094	0	+.0013	+.0029	+.0040	+.0047	+.0049					
		$R_x \searrow R_y$	-.0163	-.0152	+.0023	+.0130	+.0185	+.0201						
	1.0		-.0163	0	0	0	0	0	+.0008	+.0004	-.0001	-.0008	-.0012	-.0014
	0.8		+.0159	+.0042	+.0016	-.0002	-.0013	-.0017	+.0018	+.0005	-.0012	-.0027	-.0037	-.0040
	0.6		+.0416	+.0088	+.0027	-.0010	-.0027	-.0033	+.0026	-.0014	-.0049	-.0073	-.0086	-.0091
	0.4		+.1141	+.0132	+.0018	-.0027	-.0041	-.0044	+.0023	-.0038	-.0067	-.0076	-.0078	-.0078
	0.2		+.1760	+.0113	-.0008	-.0032	-.0032	-.0029	0	+.0012	+.0222	+.0284	+.0314	+.0323
$a/b = 1$		$R_y \rightarrow$	+.0052	0	+.0024	+.0044	+.0057	+.0063	+.0065					
		$R_x \searrow R_y$	-.0199	-.0088	+.0095	+.0177	+.0206	+.0213						
	1.0		-.0199	0	0	0	0	0	+.0009	+.0002	-.0009	-.0018	-.0025	-.0027
	0.8		+.0176	+.0044	+.0010	-.0008	-.0014	-.0015	+.0018	-.0003	-.0027	-.0046	-.0057	-.0060
	0.6		+.0425	+.0088	+.0012	-.0019	-.0027	-.0027	+.0024	-.0030	-.0070	-.0092	-.0102	-.0105
	0.4		+.1110	+.0120	-.0003	-.0034	-.0038	-.0035	+.0018	-.0051	-.0072	-.0073	-.0070	-.0068
	0.2		+.1749	+.0092	-.0021	-.0030	-.0024	-.0020	0	+.0167	+.0274	+.0326	+.0348	+.0354
$a/b = 3/2$		$R_y \rightarrow$	+.0099	0	+.0033	+.0055	+.0065	+.0070	+.0071					
		$R_x \searrow R_y$	-.0211	+.0038	+.0172	+.0198	+.0197	+.0195						
	1.0		-.0211	0	0	0	0	0	+.0008	-.0006	-.0021	-.0030	-.0034	-.0036
	0.8		+.0170	+.0039	-.0002	-.0012	-.0010	-.0009	+.0015	-.0019	-.0049	-.0065	-.0071	-.0072
	0.6		+.0385	+.0073	-.0010	-.0024	-.0022	-.0019	+.0018	-.0056	-.0093	-.0106	-.0110	-.0111
	0.4		+.1044	+.0091	-.0026	-.0035	-.0030	-.0026	+.0013	-.0065	-.0070	-.0065	-.0062	-.0061
	0.2		+.1900	+.0062	-.0029	-.0023	-.0016	-.0014	0	+.0237	+.0329	+.0358	+.0367	+.0369

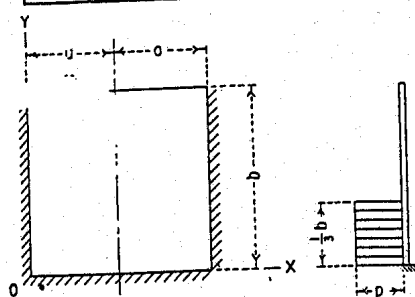

Moment = (Coefficient)(pb^2)
Reaction = (Coefficient)(pb)







FIGURE 12 - Plate fixed along three edges--Hinged along one edge, moment and reaction coefficients, Load III, 1/3 uniform load.

	y/b	$x/a \rightarrow$	M_x						M_y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$		$R_x \searrow R_y \nearrow$	-.0003	+.0024	+.0064	+.0092	+.0109	+.0114						
	1.0		-.0003	0	0	0	0	0	0	0	0	0	0	0
	0.8		+.0250	+.0010	+.0005	+.0000	-.0003	-.0005	+.0002	+.0001	+.0000	-.0001	-.0001	-.0001
	0.6		+.0500	+.0021	+.0009	+.0001	-.0006	-.0009	+.0004	+.0002	+.0000	-.0001	-.0002	-.0002
	0.4		+.0752	+.0031	+.0014	+.0001	-.0008	-.0014	+.0006	+.0003	+.0000	-.0002	-.0003	-.0003
	0.2		+.0941	+.0038	+.0016	+.0000	-.0010	-.0017	+.0008	+.0003	+.0000	-.0003	-.0005	-.0006
	0		+.0459	0	+.0001	+.0003	+.0005	+.0006	0	+.0005	+.0014	+.0023	+.0028	+.0030
$a/b = 1/4$		$R_y \rightarrow$	+.0459	+.0139	+.0546	+.0835	+.1003	+.1058						
		$R_x \searrow R_y \nearrow$	-.0061	-.0102	+.0056	+.0169	+.0237	+.0260						
	1.0		-.0061	0	0	0	0	0	0	0	0	0	0	0
	0.8		+.0505	+.0042	+.0019	+.0001	-.0011	-.0018	+.0008	+.0004	+.0000	-.0002	-.0004	-.0005
	0.6		+.1020	+.0082	+.0037	+.0002	-.0023	-.0037	+.0016	+.0007	+.0000	-.0006	-.0010	-.0011
	0.4		+.1517	+.0114	+.0049	+.0000	-.0032	-.0051	+.0023	+.0009	+.0004	-.0013	-.0019	-.0021
	0		+.1495	+.0102	+.0037	+.0004	-.0030	-.0043	+.0020	+.0004	+.0000	-.0011	-.0022	-.0031
$a/b = 3/8$		$R_y \rightarrow$	+.0304	0	+.0004	+.0010	+.0016	+.0020	0	+.0020	+.0052	+.0081	+.0100	+.0107
		$R_x \searrow R_y \nearrow$	-.0205	-.0283	+.0070	+.0313	+.0455	+.0502						
	1.0		-.0205	0	0	0	0	0	0	0	0	0	0	0
	0.8		+.0788	+.0091	+.0039	+.0001	-.0026	-.0041	+.0018	+.0007	+.0003	-.0010	-.0015	-.0016
	0.6		+.1550	+.0170	+.0070	+.0001	-.0048	-.0075	+.0034	+.0011	+.0009	-.0025	-.0035	-.0038
	0.4		+.2120	+.0207	+.0078	+.0008	-.0061	-.0089	+.0041	+.0009	+.0021	-.0044	-.0058	-.0063
	0		+.1696	+.0145	+.0045	+.0012	-.0042	-.0057	+.0029	+.0001	+.0023	-.0039	-.0049	-.0052
$a/b = 1/2$		$R_y \rightarrow$	+.0102	0	+.0008	+.0020	+.0030	+.0038	0	+.0039	+.0099	+.0153	+.0188	+.0200
		$R_x \searrow R_y \nearrow$	-.0396	-.0396	+.0153	+.0508	+.0704	+.0767						
	1.0		-.0396	0	0	0	0	0	0	0	0	0	0	0
	0.8		+.1042	+.0139	+.0053	+.0005	-.0041	-.0060	+.0028	+.0006	+.0014	-.0030	-.0040	-.0044
	0.6		+.1956	+.0245	+.0087	+.0013	-.0073	-.0104	+.0049	+.0008	+.0031	-.0062	-.0082	-.0089
	0.4		+.2450	+.0269	+.0085	+.0023	-.0081	-.0110	+.0054	+.0001	+.0048	-.0085	-.0108	-.0116
	0		+.1632	+.0159	+.0039	+.0019	-.0044	-.0054	+.0032	+.0003	+.0029	-.0043	-.0050	-.0052
$a/b = 3/4$		$R_y \rightarrow$	-.0040	0	+.0014	+.0033	+.0050	+.0060	0	+.0068	+.0167	+.0250	+.0302	+.0320
		$R_x \searrow R_y \nearrow$	-.0671	-.0671	+.0454	+.0834	+.1010	+.1061						
	1.0		-.0671	0	0	0	0	0	0	0	0	0	0	0
	0.8		+.1275	+.0181	+.0044	+.0026	-.0058	-.0071	+.0036	+.0008	+.0051	-.0085	-.0106	-.0113
	0.6		+.2274	+.0301	+.0065	+.0048	-.0097	-.0115	+.0060	+.0019	+.0094	-.0150	-.0185	-.0196
	0.4		+.2616	+.0302	+.0051	+.0055	-.0095	-.0107	+.0060	+.0030	+.0106	-.0158	-.0188	-.0198
	0		+.1479	+.0155	+.0017	+.0027	-.0035	-.0033	+.0031	+.0011	+.0027	-.0027	-.0023	-.0021
$a/b = 1$		$R_y \rightarrow$	-.0155	0	+.0028	+.0060	+.0083	+.0097	0	+.0138	+.0299	+.0417	+.0484	+.0505
		$R_x \searrow R_y \nearrow$	-.0764	+.0024	+.0716	+.0989	+.1081	+.1102						
	1.0		-.0764	0	0	0	0	0	0	0	0	0	0	0
	0.8		+.1300	+.0177	+.0016	+.0043	+.0060	+.0062	+.0035	+.0028	+.0086	+.0127	+.0150	+.0158
	0.6		+.2289	+.0289	+.0019	+.0074	+.0097	+.0098	+.0058	+.0054	+.0149	+.0213	+.0248	+.0259
	0.4		+.2583	+.0280	+.0006	+.0076	+.0089	+.0086	+.0056	+.0064	+.0152	+.0203	+.0228	+.0235
	0		+.1417	+.0137	+.0003	+.0027	+.0015	+.0012	+.0027	+.0016	+.0019	+.0008	+.0003	+.0007
$a/b = 3/2$		$R_y \rightarrow$	-.0149	0	+.0042	+.0081	+.0104	+.0115	0	+.0211	+.0403	+.0519	+.0576	+.0593
		$R_x \searrow R_y \nearrow$	-.0743	+.0499	+.0971	+.1058	+.1058	+.1053						
	1.0		-.0743	0	0	0	0	0	0	0	0	0	0	0
	0.8		+.1257	+.0145	+.0025	+.0055	+.0052	+.0046	+.0029	+.0067	+.0134	+.0169	+.0183	+.0187
	0.6		+.2208	+.0232	+.0046	+.0089	+.0081	+.0072	+.0046	+.0118	+.0223	+.0273	+.0292	+.0297
	0.4		+.2503	+.0219	+.0052	+.0082	+.0071	+.0061	+.0044	+.0123	+.0207	+.0240	+.0251	+.0253
	0		+.1461	+.0101	+.0022	+.0018	+.0005	+.0002	+.0004	+.0020	+.0019	+.0002	+.0011	+.0029




Moment = (Coefficient)(pb^2)
Reaction = (Coefficient)(pb)



POSITIVE SIGN CONVENTION

FIGURE 13 - Plate fixed along three edges--Hinged along one edge, moment and reaction coefficients, Load IV, uniformly varying load.

	y/b	x/a	M_x						M_y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
			$R_x \backslash R_y$											
$a/b = 1/8$	1.0	0	-0.0000	0	0	0	0	0	0	0	0	0	0	0
	0.8	+0.0003	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	+0.0145	+0.0006	+0.0003	+0.0000	-0.0002	-0.0003	-0.0003	+0.0001	+0.0001	+0.0000	-0.0000	-0.0000	-0.0000
	0.4	+0.0502	+0.0021	+0.0009	+0.0001	-0.0006	-0.0009	-0.0011	+0.0004	+0.0002	+0.0000	-0.0001	-0.0002	-0.0002
	0.2	+0.0819	+0.0032	+0.0014	+0.0000	-0.0009	-0.0014	-0.0016	+0.0006	+0.0003	-0.0001	-0.0003	-0.0004	-0.0005
	0	+0.0437	0	+0.0001	+0.0003	+0.0004	+0.0005	+0.0006	0	+0.0005	+0.0014	+0.0021	+0.0026	+0.0028
	$R_y \rightarrow$		+0.0437	+0.0148	+0.0536	+0.0807	+0.0963	+0.1014						
$a/b = 1/4$	1.0	0	-0.0011	0	0	0	0	0	0	0	0	0	0	0
	0.8	+0.0019	+0.0006	+0.0004	+0.0001	-0.0001	-0.0003	-0.0004	+0.0001	+0.0001	+0.0002	+0.0002	+0.0003	+0.0003
	0.6	+0.0323	+0.0031	+0.0015	+0.0002	-0.0008	-0.0014	-0.0016	+0.0006	+0.0004	+0.0002	+0.0001	-0.0000	-0.0000
	0.4	+0.1011	+0.0075	+0.0031	-0.0000	-0.0021	-0.0033	-0.0037	+0.0015	+0.0005	-0.0003	-0.0010	-0.0014	-0.0015
	0.2	+0.1286	+0.0084	+0.0030	-0.0005	-0.0025	-0.0035	-0.0038	+0.0017	+0.0002	-0.0010	-0.0020	-0.0027	-0.0029
	0	+0.0308	0	+0.0004	+0.0009	+0.0014	+0.0018	+0.0019	0	+0.0019	+0.0047	+0.0071	+0.0088	+0.0093
	$R_y \rightarrow$		+0.0308	+0.0345	+0.1011	+0.1451	+0.1693	+0.1773						
$a/b = 3/8$	1.0	0	-0.0060	0	0	0	0	0	0	0	0	0	0	0
	0.8	+0.0096	+0.0024	+0.0014	+0.0003	-0.0006	-0.0012	-0.0014	+0.0005	+0.0004	+0.0005	+0.0005	+0.0005	+0.0005
	0.6	+0.0558	+0.0073	+0.0033	+0.0002	-0.0020	-0.0033	-0.0037	+0.0015	+0.0007	+0.0001	-0.0004	-0.0007	-0.0009
	0.4	+0.1389	+0.0131	+0.0047	-0.0006	-0.0039	-0.0056	-0.0061	+0.0026	+0.0004	-0.0015	-0.0031	-0.0041	-0.0044
	0.2	+0.1458	+0.0114	+0.0031	-0.0012	-0.0034	-0.0043	-0.0046	+0.0023	-0.0002	-0.0023	-0.0038	-0.0047	-0.0050
	0	+0.0155	0	+0.0007	+0.0016	+0.0024	+0.0030	+0.0032	0	+0.0033	+0.0081	+0.0122	+0.0149	+0.0158
	$R_y \rightarrow$		+0.0155	+0.0549	+0.1390	+0.1907	+0.2183	+0.2269						
$a/b = 1/2$	1.0	0	-0.0143	0	0	0	0	0	0	0	0	0	0	0
	0.8	+0.0205	+0.0048	+0.0024	+0.0002	-0.0013	-0.0022	-0.0025	+0.0010	+0.0007	+0.0004	+0.0001	-0.0001	-0.0002
	0.6	+0.0757	+0.0112	+0.0044	-0.0003	-0.0032	-0.0048	-0.0053	+0.0022	+0.0007	-0.0007	-0.0020	-0.0028	-0.0031
	0.4	+0.1573	+0.0163	+0.0048	-0.0016	-0.0050	-0.0066	-0.0070	+0.0033	-0.0002	-0.0034	-0.0058	-0.0073	-0.0078
	0.2	+0.1415	+0.0119	+0.0022	-0.0019	-0.0034	-0.0039	-0.0040	+0.0024	-0.0008	-0.0032	-0.0046	-0.0054	-0.0056
	0	+0.0064	0	+0.0011	+0.0026	+0.0037	+0.0044	+0.0047	0	+0.0056	+0.0129	+0.0187	+0.0222	+0.0234
	$R_y \rightarrow$		+0.0064	+0.0837	+0.1762	+0.2284	+0.2544	+0.2622						
$a/b = 3/4$	1.0	0	-0.0276	0	0	0	0	0	0	0	0	0	0	0
	0.8	+0.0322	+0.0072	+0.0024	-0.0006	-0.0022	-0.0029	-0.0030	+0.0014	+0.0004	-0.0008	-0.0020	-0.0028	-0.0031
	0.6	+0.0919	+0.0142	+0.0035	-0.0020	-0.0045	-0.0054	-0.0056	+0.0028	-0.0003	-0.0035	-0.0060	-0.0077	-0.0082
	0.4	+0.1649	+0.0176	+0.0024	-0.0036	-0.0056	-0.0061	-0.0062	+0.0035	-0.0022	-0.0070	-0.0102	-0.0119	-0.0125
	0.2	+0.1319	+0.0109	+0.0003	-0.0024	-0.0027	-0.0025	-0.0024	+0.0022	-0.0020	-0.0039	-0.0044	-0.0043	-0.0043
	0	+0.0010	0	+0.0021	+0.0043	+0.0057	+0.0065	+0.0067	0	+0.0106	+0.0214	+0.0285	+0.0323	+0.0335
	$R_y \rightarrow$		+0.0010	+0.1378	+0.2297	+0.2714	+0.2888	+0.2935						
$a/b = 1$	1.0	0	-0.0329	0	0	0	0	0	0	0	0	0	0	0
	0.8	+0.0341	+0.0073	+0.0013	-0.0015	-0.0023	-0.0025	-0.0025	+0.0015	-0.0001	-0.0021	-0.0038	-0.0048	-0.0051
	0.6	+0.0928	+0.0138	+0.0013	-0.0033	-0.0045	-0.0045	-0.0045	+0.0028	-0.0018	-0.0060	-0.0091	-0.0107	-0.0113
	0.4	+0.1623	+0.0161	-0.0002	-0.0046	-0.0052	-0.0049	-0.0048	+0.0032	-0.0044	-0.0097	-0.0127	-0.0141	-0.0145
	0.2	+0.1289	+0.0093	-0.0011	-0.0024	-0.0019	-0.0014	-0.0013	+0.0019	-0.0028	-0.0039	-0.0035	-0.0031	-0.0029
	0	+0.0040	0	+0.0031	+0.0055	+0.0068	+0.0074	+0.0076	0	+0.0155	+0.0275	+0.0341	+0.0371	+0.0380
	$R_y \rightarrow$		+0.0040	+0.1813	+0.2613	+0.2894	+0.2987	+0.3008						
$a/b = 3/2$	1.0	0	-0.0339	0	0	0	0	0	0	0	0	0	0	0
	0.8	+0.0319	+0.0063	-0.0006	-0.0021	-0.0020	-0.0017	-0.0016	+0.0013	-0.0015	-0.0042	-0.0057	-0.0063	-0.0065
	0.6	+0.0878	+0.0112	-0.0019	-0.0041	-0.0037	-0.0032	-0.0031	+0.0022	-0.0047	-0.0095	-0.0119	-0.0129	-0.0131
	0.4	+0.1577	+0.0123	-0.0034	-0.0048	-0.0041	-0.0036	-0.0034	+0.0025	-0.0080	-0.0129	-0.0147	-0.0153	-0.0154
	0.2	+0.1365	+0.0065	-0.0021	-0.0017	-0.0009	-0.0006	-0.0005	+0.0013	-0.0035	-0.0032	-0.0024	-0.0019	-0.0018
	0	+0.0169	0	+0.0047	+0.0069	+0.0077	+0.0080	+0.0080	0	+0.0235	+0.0346	+0.0386	+0.0399	+0.0402
	$R_y \rightarrow$		+0.0169	+0.2361	+0.2888	+0.2992	+0.3007	+0.3008						

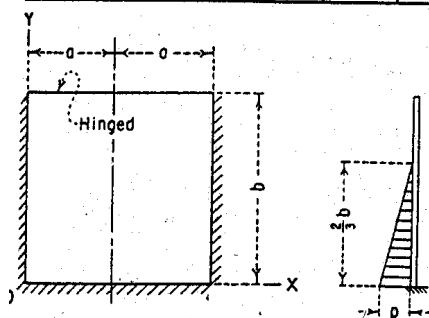

Moment = (Coefficient)(pb^2)
Reaction = (Coefficient)(pb)





FIGURE 14 - Plate fixed along three edges--Hinged along one edge, moment and reaction coefficients, Load V , $2/3$ uniformly varying load.

	y/b	$x/a \rightarrow$	M_x						M_y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
			$R_x \nearrow$	$R_y \rightarrow$										
$a/b = 1/8$	1.0	0	+0.0000	0	0	0	0	0	0	0	0	0	0	0
	0.8	0	-0.0000	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	0	-0.0001	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.4	0	+0.0040	+0.0002	+0.0001	+0.0000	-0.0001	-0.0001	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.2	0	+0.0459	+0.0017	+0.0007	+0.0000	-0.0003	-0.0008	+0.0003	+0.0001	-0.0001	-0.0001	-0.0002	-0.0002
	0	0	+0.0369	0	+0.0001	+0.0002	+0.0004	+0.0004	0	+0.0005	+0.0012	+0.0018	+0.0022	+0.0023
		$R_y \rightarrow$	+0.0369	+0.0176	+0.0505	+0.0722	+0.0841	+0.0879						
$a/b = 1/4$	1.0	0	-0.0000	0	0	0	0	0	0	0	0	0	0	0
	0.8	0	-0.0003	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	0	+0.0004	+0.0002	+0.0002	+0.0001	-0.0001	-0.0001	+0.0001	+0.0001	+0.0001	+0.0001	+0.0001	+0.0001
	0.4	0	+0.0126	+0.0014	+0.0007	+0.0001	-0.0004	-0.0006	+0.0003	+0.0002	+0.0001	+0.0001	+0.0000	+0.0000
	0.2	0	+0.0693	+0.0040	+0.0013	-0.0003	-0.0012	-0.0016	+0.0008	+0.0001	-0.0006	-0.0012	-0.0015	-0.0016
	0	0	+0.0297	0	+0.0003	+0.0006	+0.0009	+0.0011	0	+0.0014	+0.0032	+0.0046	+0.0055	+0.0058
		$R_y \rightarrow$	+0.0297	+0.0415	+0.0869	+0.1126	+0.1256	+0.1295						
$a/b = 3/8$	1.0	0	-0.0007	0	0	0	0	0	0	0	0	0	0	0
	0.8	0	+0.0002	+0.0003	+0.0002	+0.0001	-0.0001	-0.0002	+0.0001	+0.0001	+0.0001	+0.0001	+0.0002	+0.0002
	0.6	0	+0.0036	+0.0010	+0.0006	+0.0001	-0.0002	-0.0005	+0.0002	+0.0002	+0.0002	+0.0002	+0.0002	+0.0002
	0.4	0	+0.0216	+0.0028	+0.0012	-0.0000	-0.0009	-0.0012	+0.0006	+0.0003	-0.0000	-0.0003	-0.0005	-0.0005
	0.2	0	+0.0788	+0.0051	+0.0010	-0.0008	-0.0016	-0.0018	+0.0010	-0.0003	-0.0014	-0.0022	-0.0027	-0.0029
	0	0	+0.0228	0	+0.0004	+0.0009	+0.0013	+0.0015	0	+0.0020	+0.0044	+0.0063	+0.0075	+0.0078
		$R_y \rightarrow$	+0.0228	+0.0615	+0.1076	+0.1314	+0.1428	+0.1461						
$a/b = 1/2$	1.0	0	-0.0020	0	0	0	0	0	0	0	0	0	0	0
	0.8	0	+0.0019	+0.0007	+0.0004	+0.0001	-0.0002	-0.0003	+0.0001	+0.0001	+0.0001	+0.0001	+0.0001	+0.0001
	0.6	0	+0.0073	+0.0018	+0.0009	+0.0001	-0.0005	-0.0008	+0.0004	+0.0003	+0.0002	+0.0000	-0.0000	-0.0001
	0.4	0	+0.0258	+0.0035	+0.0012	-0.0003	-0.0010	-0.0014	+0.0007	+0.0002	-0.0004	-0.0009	-0.0012	-0.0013
	0.2	0	+0.0769	+0.0050	+0.0004	-0.0013	-0.0015	-0.0016	+0.0010	-0.0007	-0.0020	-0.0028	-0.0032	-0.0033
	0	0	+0.0203	0	+0.0006	+0.0013	+0.0017	+0.0019	0	+0.0031	+0.0063	+0.0085	+0.0097	+0.0101
		$R_y \rightarrow$	+0.0203	+0.0812	+0.1252	+0.1449	+0.1532	+0.1554						
$a/b = 3/4$	1.0	0	-0.0044	0	0	0	0	0	0	0	0	0	0	0
	0.8	0	+0.0040	+0.0011	+0.0005	-0.0000	-0.0003	-0.0005	+0.0002	+0.0001	-0.0000	-0.0002	-0.0003	-0.0003
	0.6	0	+0.0106	+0.0024	+0.0008	-0.0002	-0.0007	-0.0009	+0.0005	+0.0002	-0.0002	-0.0006	-0.0009	-0.0010
	0.4	0	+0.0273	+0.0038	+0.0006	-0.0007	-0.0012	-0.0012	+0.0008	-0.0002	-0.0011	-0.0018	-0.0022	-0.0023
	0.2	0	+0.0739	+0.0041	-0.0005	-0.0012	-0.0012	-0.0010	+0.0008	-0.0015	-0.0027	-0.0031	-0.0032	-0.0032
	0	0	+0.0216	0	+0.0010	+0.0018	+0.0022	+0.0024	0	+0.0052	+0.0091	+0.0111	+0.0121	+0.0124
		$R_y \rightarrow$	+0.0216	+0.1096	+0.1449	+0.1565	+0.1604	+0.1613						
$a/b = 1$	1.0	0	-0.0054	0	0	0	0	0	0	0	0	0	0	0
	0.8	0	+0.0045	+0.0012	+0.0003	-0.0002	-0.0004	-0.0004	+0.0002	+0.0001	-0.0002	-0.0005	-0.0006	-0.0007
	0.6	0	+0.0110	+0.0024	+0.0004	-0.0005	-0.0007	-0.0007	+0.0005	-0.0000	-0.0006	-0.0011	-0.0015	-0.0016
	0.4	0	+0.0262	+0.0035	-0.0000	-0.0010	-0.0010	-0.0009	+0.0007	-0.0006	-0.0017	-0.0023	-0.0026	-0.0027
	0.2	0	+0.0740	+0.0033	-0.0009	-0.0011	-0.0009	-0.0008	+0.0007	-0.0021	-0.0029	-0.0030	-0.0030	-0.0029
	0	0	+0.0261	0	+0.0014	+0.0022	+0.0025	+0.0026	0	+0.0070	+0.0108	+0.0124	+0.0131	+0.0133
		$R_y \rightarrow$	+0.0261	+0.1273	+0.1538	+0.1603	+0.1619	+0.1623						
$a/b = 3/2$	1.0	0	-0.0058	0	0	0	0	0	0	0	0	0	0	0
	0.8	0	+0.0044	+0.0011	-0.0000	-0.0003	-0.0003	-0.0003	+0.0002	-0.0001	-0.0005	-0.0008	-0.0009	-0.0009
	0.6	0	+0.0101	+0.0021	-0.0002	-0.0007	-0.0006	-0.0005	+0.0004	-0.0004	-0.0012	-0.0017	-0.0018	-0.0019
	0.4	0	+0.0232	+0.0027	-0.0007	-0.0010	-0.0008	-0.0007	+0.0005	-0.0014	-0.0024	-0.0028	-0.0029	-0.0029
	0.2	0	+0.0815	+0.0021	-0.0011	-0.0009	-0.0007	-0.0006	+0.0004	-0.0026	-0.0030	-0.0028	-0.0028	-0.0027
	0	0	+0.0360	0	+0.0019	+0.0025	+0.0027	+0.0027	0	+0.0095	+0.0125	+0.0135	+0.0136	+0.0136
		$R_y \rightarrow$	+0.0360	+0.1454	+0.1600	+0.1619	+0.1621	+0.1621						

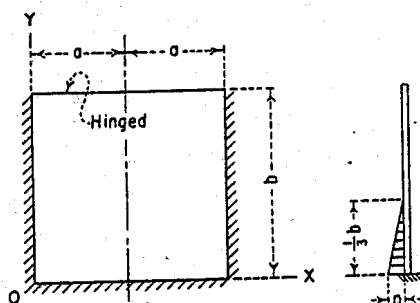

Moment = (Coefficient)(pb^2)
Reaction = (Coefficient)(pb)





FIGURE 15 - Plate fixed along three edges--Hinged along one edge, moment and reaction coefficients, Load VI, 1/3 uniformly varying load.

	y/b	$x/a \rightarrow$	M_x						M_y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$		$R_x \searrow R_y$	-0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000						
	1.0	-0.0000	0	0	0	0	0	0	0	0	0	0	0	0
	0.8	-0.0001	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000
	0.6	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.4	-0.0000	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.2	+0.0119	+0.0004	+0.0002	+0.0000	-0.0001	-0.0002	-0.0002	+0.0001	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0	+0.0237	0	+0.0001	+0.0002	+0.0002	+0.0003	+0.0003	0	+0.0003	+0.0008	+0.0012	+0.0014	+0.0014
$a/b = 1/4$		$R_y \rightarrow$	+0.0237	+0.0207	+0.0435	+0.0563	+0.0628	+0.0648						
		$R_x \searrow R_y$	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000						
	1.0	-0.0000	0	0	0	0	0	0	0	0	0	0	0	0
	0.8	-0.0001	+0.0000	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	-0.0001	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.4	+0.0010	+0.0001	+0.0001	+0.0000	-0.0000	-0.0001	-0.0001	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0	+0.0214	0	+0.0002	+0.0003	+0.0004	+0.0005	+0.0005	0	+0.0008	+0.0016	+0.0021	+0.0024	+0.0025
$a/b = 3/8$		$R_y \rightarrow$	+0.0214	+0.0405	+0.0624	+0.0721	+0.0762	+0.0773						
		$R_x \searrow R_y$	-0.0001	-0.0003	-0.0002	-0.0000	+0.0001	+0.0001						
	1.0	-0.0001	0	0	0	0	0	0	0	0	0	0	0	0
	0.8	-0.0000	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	+0.0004	+0.0002	+0.0001	+0.0000	-0.0000	-0.0001	-0.0001	+0.0000	+0.0000	+0.0000	+0.0001	+0.0001	+0.0001
	0.4	+0.0028	+0.0005	+0.0002	+0.0000	-0.0001	-0.0002	-0.0002	+0.0001	+0.0001	+0.0001	+0.0000	-0.0000	-0.0000
	0	+0.0196	0	+0.0003	+0.0003	+0.0004	+0.0005	+0.0005	0	+0.0008	+0.0016	+0.0022	+0.0026	+0.0027
$a/b = 1/2$		$R_y \rightarrow$	+0.0196	+0.0516	+0.0685	+0.0758	+0.0789	+0.0797						
		$R_x \searrow R_y$	-0.0003	-0.0007	-0.0002	+0.0001	+0.0003	+0.0004						
	1.0	-0.0003	0	0	0	0	0	0	0	0	0	0	0	0
	0.8	+0.0002	+0.0001	+0.0001	+0.0000	-0.0000	-0.0001	-0.0001	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	+0.0010	+0.0003	+0.0002	+0.0000	-0.0001	-0.0001	-0.0002	+0.0001	+0.0001	+0.0000	+0.0000	+0.0000	+0.0000
	0.4	+0.0036	+0.0007	+0.0003	-0.0000	-0.0002	-0.0003	-0.0003	+0.0001	+0.0001	-0.0000	-0.0001	-0.0001	-0.0002
	0	+0.0202	0	+0.0002	+0.0004	+0.0006	+0.0006	+0.0006	0	+0.0012	+0.0022	+0.0028	+0.0031	+0.0032
$a/b = 3/4$		$R_y \rightarrow$	+0.0202	+0.0595	+0.0740	+0.0792	+0.0811	+0.0816						
		$R_x \searrow R_y$	-0.0008	-0.0008	+0.0000	+0.0005	+0.0008	+0.0009						
	1.0	-0.0008	0	0	0	0	0	0	0	0	0	0	0	0
	0.8	+0.0006	+0.0002	+0.0001	-0.0000	-0.0001	-0.0001	-0.0001	+0.0000	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000
	0.6	+0.0016	+0.0004	+0.0002	-0.0000	-0.0001	-0.0002	-0.0002	+0.0001	+0.0000	-0.0000	-0.0001	-0.0001	-0.0001
	0.4	+0.0039	+0.0007	+0.0001	-0.0001	-0.0002	-0.0002	-0.0002	+0.0001	+0.0000	-0.0001	-0.0003	-0.0003	-0.0004
	0	+0.0207	+0.0010	-0.0001	-0.0003	-0.0003	-0.0002	-0.0002	+0.0002	-0.0003	-0.0006	-0.0007	-0.0007	-0.0007
$a/b = 1$		$R_y \rightarrow$	+0.0233	0	+0.0004	+0.0006	+0.0007	+0.0007	0	+0.0018	+0.0029	+0.0034	+0.0036	+0.0036
		$R_x \searrow R_y$	-0.0009	-0.0005	+0.0003	+0.0007	+0.0009	+0.0009						
	1.0	-0.0009	0	0	0	0	0	0	0	0	0	0	0	0
	0.8	+0.0007	+0.0002	+0.0001	-0.0000	-0.0001	-0.0001	-0.0001	+0.0000	+0.0000	-0.0000	-0.0001	-0.0001	-0.0001
	0.6	+0.0017	+0.0004	+0.0001	-0.0001	-0.0001	-0.0001	-0.0001	+0.0001	+0.0000	-0.0001	-0.0002	-0.0002	-0.0002
	0.4	+0.0037	+0.0007	+0.0000	-0.0002	-0.0002	-0.0002	-0.0002	+0.0001	-0.0000	-0.0002	-0.0004	-0.0004	-0.0004
	0	+0.0209	+0.0008	-0.0002	-0.0003	-0.0002	-0.0002	-0.0002	+0.0002	-0.0004	-0.0006	-0.0007	-0.0007	-0.0007
$a/b = 3/2$		$R_y \rightarrow$	+0.0270	0	+0.0005	+0.0007	+0.0007	+0.0008	0	+0.0023	+0.0033	+0.0036	+0.0038	+0.0038
		$R_x \searrow R_y$	-0.0010	+0.0001	+0.0007	+0.0008	+0.0008	+0.0008						
	1.0	-0.0010	0	0	0	0	0	0	0	0	0	0	0	0
	0.8	+0.0007	+0.0002	-0.0000	-0.0001	-0.0001	-0.0000	-0.0000	+0.0000	-0.0000	-0.0001	-0.0001	-0.0001	-0.0001
	0.6	+0.0016	+0.0004	-0.0000	-0.0001	-0.0001	-0.0001	-0.0001	+0.0001	-0.0000	-0.0002	-0.0003	-0.0003	-0.0003
	0.4	+0.0031	+0.0005	-0.0001	-0.0002	-0.0001	-0.0001	-0.0001	+0.0001	-0.0002	-0.0004	-0.0004	-0.0005	-0.0005
	0	+0.0232	+0.0005	-0.0003	-0.0002	-0.0001	-0.0001	-0.0001	+0.0001	-0.0006	-0.0007	-0.0006	-0.0006	-0.0006

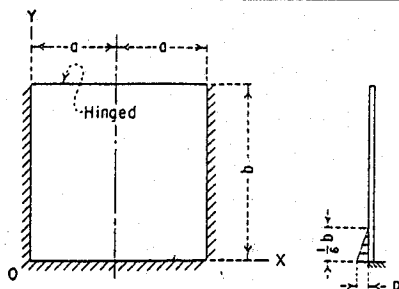

Moment = (Coefficient)(pb^2)
Reaction = (Coefficient)(pb)






FIGURE 16 - Plate fixed along three edges--Hinged along one edge, moment and reaction coefficients, Load VII, 1/6 uniformly varying load.

		M_x								M_y							
		y/b	$x/a \rightarrow$	0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0		
$a/b = 1/8$	$R_x \quad R_y$			+6.697	+5.4276	+4.9866	+4.6846	+4.5088	+4.4508								
	1.0			+6.697	+2.000	+2.000	+2.000	+2.000	+2.000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000		
	0.8			-3.0788	-1.142	-0.481	-0.003	+0.322	+0.509	+0.571	-0.228	-0.080	+0.046	+0.142	+0.201		
	0.6			-0.357	-0.072	-0.050	-0.016	+0.015	+0.037	+0.045	-0.014	-0.017	-0.024	-0.031	-0.036		
	0.4			+0.069	-0.001	-0.002	-0.001	-0.000	-0.001	-0.001	-0.000	-0.001	-0.002	-0.003	-0.004		
	0.2			+0.007	+0.000	+0.000	-0.000	-0.000	-0.000	-0.000	+0.000	+0.000	-0.000	-0.000	-0.000		
	0			+0.001	0	+0.000	+0.000	+0.000	+0.000	+0.000	0	+0.000	+0.000	+0.000	+0.000		
$R_y \rightarrow$			+0.001	-0.000	-0.003	-0.003	-0.005	+0.015									
$a/b = 1/4$	$R_x \quad R_y$			+1.5770	+5.9371	+4.6774	+3.8986	+3.4755	+3.3414								
	1.0			+1.5770	+2.000	+2.000	+2.000	+2.000	+2.000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000		
	0.8			-5.4606	-3.206	-1.104	+0.193	+0.961	+1.366	+1.491	-0.641	-0.052	+0.485	+0.901	+1.160		
	0.6			-4.874	-0.780	-0.459	-0.097	+0.199	+0.387	+0.452	-0.160	-0.144	-0.143	-0.143	-0.140		
	0.4			+0.172	-0.119	-0.095	-0.039	+0.021	+0.065	+0.081	-0.024	-0.036	-0.059	-0.081	-0.097		
	0.2			+0.192	-0.006	-0.011	-0.009	-0.002	+0.004	+0.006	-0.001	-0.006	-0.015	-0.023	-0.030		
	0			+0.045	0	+0.000	+0.000	+0.000	-0.000	-0.000	0	+0.001	+0.002	+0.001	-0.001		
$R_y \rightarrow$			+0.045	+0.048	+0.095	+0.094	+0.079	+0.070									
$a/b = 3/8$	$R_x \quad R_y$			+2.4931	+5.9109	+4.0989	+3.1001	+2.5998	+2.4478								
	1.0			+2.4931	+2.000	+2.000	+2.000	+2.000	+2.000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000		
	0.8			-6.6847	-4.602	-1.190	+0.567	+1.456	+1.870	+1.991	-0.920	+0.241	+1.285	+2.060	+2.526		
	0.6			-1.2696	-2.103	-1.015	-0.084	+0.576	+0.960	+1.085	-0.421	-0.275	-0.122	+0.026	+0.132		
	0.4			-1.792	-0.677	-0.432	-0.119	+0.157	+0.341	+0.404	-0.135	-0.145	-0.179	-0.210	-0.229		
	0.2			+0.538	-0.126	-0.118	-0.057	+0.014	+0.066	+0.086	-0.025	-0.054	-0.099	-0.144	-0.175		
	0			+0.436	0	-0.002	-0.012	-0.026	-0.038	-0.042	0	-0.010	-0.060	-0.130	-0.188		
$R_y \rightarrow$			+0.436	+0.886	+0.472	-0.272	-0.896	-1.135									
$a/b = 1/2$	$R_x \quad R_y$			+3.2446	+5.5489	+3.5023	+2.4919	+2.3237	+1.8871								
	1.0			+3.2446	+2.000	+2.000	+2.000	+2.000	+2.000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000		
	0.8			-7.2146	-5.260	-0.934	+0.934	+1.737	+2.065	+2.153	-1.052	+0.687	+2.158	+3.181	+3.767		
	0.6			-1.8920	-3.238	-1.302	+0.090	+0.945	+1.1392	+1.529	-0.648	-0.284	+0.146	+0.542	+0.814		
	0.4			-4.721	-1.411	-0.771	-0.128	+0.366	+0.663	+0.761	-0.282	-0.243	-0.215	-0.176	-0.139		
	0.2			+1.106	-0.326	-0.274	-0.113	+0.041	+0.140	+0.174	-0.065	-0.143	-0.254	-0.351	-0.415		
	0			+1.191	0	-0.012	-0.061	-0.122	-0.170	-0.187	0	-0.061	-0.306	-0.611	-0.848		
$R_y \rightarrow$			+1.191	+2.253	+0.313	-0.224	-0.423	-0.4810									
$a/b = 3/4$	$R_x \quad R_y$			+4.1774	+4.5223	+2.5688	+1.7997	+1.5009	+1.4223								
	1.0			+4.1774	+2.000	+2.000	+2.000	+2.000	+2.000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000		
	0.8			-7.4798	-5.275	-0.110	+1.444	+1.893	+2.006	+2.025	-1.055	+1.707	+3.683	+4.868	+5.481		
	0.6			-2.3733	-4.145	-1.012	+0.607	+1.307	+1.565	+1.626	-0.829	+0.025	+1.016	+1.829	+2.333		
	0.4			-7.580	-2.174	-0.853	+0.102	+0.619	+0.842	+0.900	-0.435	-0.269	-0.030	+0.226	+0.413		
	0.2			+2.313	-0.565	-0.393	-0.124	+0.024	+0.074	+0.084	-0.113	-0.344	-0.609	-0.822	-0.959		
	0			+2.415	0	-0.058	-0.230	-0.408	-0.530	-0.573	0	-0.292	-1.151	-2.041	-2.863		
$R_y \rightarrow$			+2.415	+3.038	-2.583	-7.761	-1.0911	-1.1933									
$a/b = 1$	$R_x \quad R_y$			+4.5863	+3.6124	+2.0176	+1.5352	+1.3940	+1.3645								
	1.0			+4.5863	+2.000	+2.000	+2.000	+2.000	+2.000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000		
	0.8			-7.4825	-4.636	+0.610	+1.679	+1.824	+1.791	+1.768	-0.927	+2.639	+4.749	+5.836	+6.341		
	0.6			-2.3598	-4.029	-0.359	+0.984	+1.1318	+1.340	+1.324	-0.806	+0.488	+1.822	+2.758	+3.272		
	0.4			-7.966	-2.255	-0.526	+0.361	+0.636	+0.666	+0.655	-0.451	-0.178	+0.229	+0.593	+0.819		
	0.2			+2.918	-0.632	-0.324	-0.088	-0.056	-0.097	-0.118	-0.126	-0.504	-0.885	-1.176	-1.355		
	0			+3.067	0	-0.131	-0.404	-0.631	-0.762	-0.804	0	-0.657	-2.021	-3.153	-3.811		
$R_y \rightarrow$			+3.067	+1.274	-0.619	-1.1518	-1.3912	-1.4576									
$a/b = 3/2$	$R_x \quad R_y$			+4.8170	+2.5171	+1.5692	+1.4276	+1.4268	+1.4337								
	1.0			+4.8170	+2.000	+2.000	+2.000	+2.000	+2.000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000		
	0.8			-7.6698	-3.365	+1.372	+1.743	+1.627	+1.526	+1.493	-0.673	+4.020	+5.934	+6.651	+6.905		
	0.6			-2.0746	-3.261	+0.566	+1.203	+1.114	+0.985	+0.939	-0.652	+1.391	+2.901	+3.639	+3.932		
	0.4			-7.384	-1.975	+0.076	+0.543	+0.475	+0.367	+0.328	-0.395	+0.103	+0.656	+0.969	+1.096		
	0.2			+3.738	-0.607	-0.163	-0.110	-0.213	-0.289	-0.313	-0.121	-0.757	-1.255	-1.550	-1.690		
	0			+3.532	0	-0.314	-0.664	-0.846	-0.917	-0.934	0	-1.570	-3.320	-4.231	-4.584		
$R_y \rightarrow$			+3.532	-3.898	-1.1608	-1.4315	-1.4935	-1.5015									



$$\text{Moment} = (\text{Coefficient})(M)$$


$$\text{Reaction} = (\text{Coefficient})(\frac{M}{b})$$




POSITIVE SIGN CONVENTION

FIGURE 17 - Plate fixed along three edges--Hinged along one edge, moment and reaction coefficients, Load VIII, moment at hinged edge.

	y/b	R _x	x/a	M _x						M _y					
				0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
a/b = 1/8	1.0	+1.1309	0	-0.0029	-0.0051	-0.0067	-0.0077	-0.0080	0	0	0	0	0	0	0
	0.8	+1.1222	0	-0.0028	-0.0050	-0.0065	-0.0074	-0.0077	0	-0.0005	-0.0009	-0.0012	-0.0014	-0.0015	-0.0015
	0.6	+1.1250	0	-0.0028	-0.0050	-0.0065	-0.0074	-0.0077	0	-0.0006	-0.0010	-0.0013	-0.0015	-0.0016	-0.0016
	0.4	+1.1260	0	-0.0027	-0.0048	-0.0063	-0.0072	-0.0075	0	-0.0006	-0.0011	-0.0015	-0.0017	-0.0017	-0.0017
	0.2	+1.1057	0	-0.0021	-0.0037	-0.0048	-0.0055	-0.0057	0	-0.0007	-0.0012	-0.0016	-0.0018	-0.0018	-0.0019
	0	-0.0003	0	+0.0005	+0.0009	+0.0012	+0.0014	+0.0015	0	+0.0025	+0.0046	+0.0061	+0.0070	+0.0073	+0.0073
	R _x	R _y	-0.0003	+0.0869	+0.1326	+0.1619	+0.1783	+0.1831							
a/b = 1/4	1.0	+2.2949	0	-0.0114	-0.0203	-0.0266	-0.0304	-0.0317	0	0	0	0	0	0	0
	0.8	+2.347	0	-0.0108	-0.0191	-0.0250	-0.0285	-0.0297	0	-0.0020	-0.0035	-0.0046	-0.0052	-0.0054	-0.0054
	0.6	+2.476	0	-0.0102	-0.0180	-0.0235	-0.0267	-0.0278	0	-0.0026	-0.0047	-0.0062	-0.0071	-0.0074	-0.0074
	0.4	+2.347	0	-0.0086	-0.0150	-0.0194	-0.0219	-0.0228	0	-0.0028	-0.0051	-0.0068	-0.0078	-0.0082	-0.0082
	0.2	+1.211	0	-0.0050	-0.0081	-0.0101	-0.0111	-0.0115	0	-0.0019	-0.0033	-0.0043	-0.0048	-0.0050	-0.0050
	0	-0.0971	0	+0.0020	+0.0037	+0.0049	+0.0056	+0.0059	0	+0.0101	+0.0185	+0.0245	+0.0282	+0.0294	+0.0294
	R _x	R _y	-0.0971	+0.1737	+0.2670	+0.3251	+0.3574	+0.3677							
a/b = 3/8	1.0	+5.262	0	-0.0236	-0.0416	-0.0543	-0.0619	-0.0644	0	0	0	0	0	0	0
	0.8	+3.276	0	-0.0215	-0.0378	-0.0492	-0.0560	-0.0582	0	-0.0044	-0.0079	-0.0103	-0.0117	-0.0122	-0.0122
	0.6	+3.389	0	-0.0190	-0.0330	-0.0426	-0.0482	-0.0500	0	-0.0060	-0.0107	-0.0142	-0.0162	-0.0169	-0.0169
	0.4	+2.910	0	-0.0145	-0.0245	-0.0310	-0.0346	-0.0358	0	-0.0056	-0.0100	-0.0131	-0.0150	-0.0156	-0.0156
	0.2	+0.752	0	-0.0069	-0.0105	-0.0123	-0.0130	-0.0133	0	-0.0009	-0.0009	-0.0006	-0.0002	-0.0001	-0.0001
	0	-2.069	0	+0.0043	+0.0079	+0.0105	+0.0121	+0.0127	0	+0.0215	+0.0395	+0.0527	+0.0607	+0.0634	+0.0634
	R _x	R _y	-2.069	+0.2568	+0.3921	+0.4779	+0.5256	+0.5410							
a/b = 1/2	1.0	+8.321	0	-0.0356	-0.0620	-0.0801	-0.0906	-0.0941	0	0	0	0	0	0	0
	0.8	+3.840	0	-0.0317	-0.0548	-0.0704	-0.0794	-0.0824	0	-0.0073	-0.0129	-0.0169	-0.0192	-0.0200	-0.0200
	0.6	+3.852	0	-0.0267	-0.0452	-0.0573	-0.0641	-0.0663	0	-0.0094	-0.0168	-0.0220	-0.0252	-0.0262	-0.0262
	0.4	+2.928	0	-0.0189	-0.0307	-0.0377	-0.0413	-0.0424	0	-0.0070	-0.0121	-0.0154	-0.0173	-0.0179	-0.0179
	0.2	-0.0161	0	-0.0074	-0.0099	-0.0105	-0.0105	-0.0105	0	+0.0036	+0.0081	+0.0124	+0.0154	+0.0165	+0.0165
	0	-2.870	0	+0.0077	+0.0140	+0.0185	+0.0213	+0.0222	0	+0.0385	+0.0700	+0.0927	+0.1063	+0.1108	+0.1108
	R _x	R _y	-2.870	+0.3368	+0.5139	+0.6225	+0.6818	+0.7007							
a/b = 3/4	1.0	+1.4911	0	-0.0521	-0.0863	-0.1072	-0.1182	-0.1217	0	0	0	0	0	0	0
	0.8	+4.033	0	-0.0451	-0.0736	-0.0904	-0.0991	-0.1017	0	-0.0115	-0.0196	-0.0250	-0.0281	-0.0291	-0.0291
	0.6	+3.753	0	-0.0359	-0.0566	-0.0677	-0.0730	-0.0745	0	-0.0127	-0.0213	-0.0267	-0.0295	-0.0304	-0.0304
	0.4	+2.190	0	-0.0230	-0.0333	-0.0375	-0.0388	-0.0391	0	-0.0038	-0.0041	-0.0027	-0.0011	-0.0005	-0.0005
	0.2	-1.892	0	-0.0054	-0.0037	-0.0007	+0.0016	+0.0024	0	+0.0200	+0.0405	+0.0576	+0.0687	+0.0726	+0.0726
	0	-3.645	0	+0.0155	+0.0276	+0.0361	+0.0411	+0.0427	0	+0.0776	+0.1362	+0.1805	+0.2054	+0.2136	+0.2136
	R _x	R _y	-3.645	+0.4687	+0.6982	+0.8289	+0.8973	+0.9187							
a/b = 1	1.0	+1.9792	0	-0.0600	-0.0919	-0.1070	-0.1131	-0.1146	0	0	0	0	0	0	0
	0.8	+3.776	0	-0.0512	-0.0768	-0.0879	-0.0918	-0.0927	0	-0.0128	-0.0205	-0.0246	-0.0265	-0.0271	-0.0271
	0.6	+3.266	0	-0.0396	-0.0562	-0.0617	-0.0627	-0.0627	0	-0.0114	-0.0164	-0.0177	-0.0174	-0.0171	-0.0171
	0.4	+1.419	0	-0.0234	-0.0288	-0.0279	-0.0259	-0.0250	0	+0.0043	+0.0137	+0.0237	+0.0310	+0.0337	+0.0337
	0.2	-2.923	0	-0.0018	+0.0049	+0.0117	+0.0161	+0.0177	0	+0.0397	+0.0783	+0.1089	+0.1280	+0.1345	+0.1345
	0	-3.642	0	+0.0230	+0.0401	+0.0515	+0.0580	+0.0601	0	+0.1150	+0.2003	+0.2574	+0.2901	+0.3007	+0.3007
	R _x	R _y	-3.642	+0.5636	+0.8099	+0.9373	+0.9994	+1.0180							
a/b = 3/2	1.0	+2.4011	0	-0.0670	-0.0841	-0.0814	-0.0751	-0.0723	0	0	0	0	0	0	0
	0.8	+3.458	0	-0.0565	-0.0685	-0.0642	-0.0578	-0.0551	0	-0.0126	-0.0157	-0.0142	-0.0120	-0.0111	-0.0111
	0.6	+2.741	0	-0.0419	-0.0460	-0.0391	-0.0323	-0.0297	0	-0.0056	+0.0005	+0.0103	+0.0180	+0.0208	+0.0208
	0.4	+0.773	0	-0.0213	-0.0161	-0.0066	+0.0003	+0.0028	0	+0.0216	+0.0507	+0.0763	+0.0978	+0.0985	+0.0985
	0.2	-3.443	0	+0.0055	+0.0202	+0.0316	+0.0384	+0.0406	0	+0.0754	+0.1423	+0.1898	+0.2171	+0.2260	+0.2260
	0	-2.922	0	+0.0353	+0.0583	+0.0722	+0.0794	+0.0817	0	+0.1765	+0.2917	+0.3608	+0.3972	+0.4084	+0.4084
	R _x	R _y	-2.922	+0.6928	+0.9244	+1.0146	+1.0474	+1.0554							

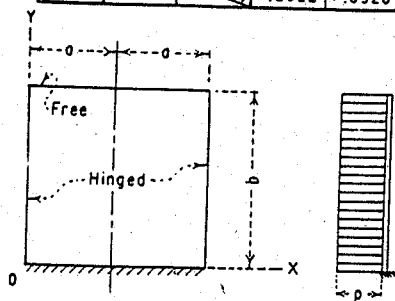


Moment = (Coefficient) (pb²)
Reaction = (Coefficient) (pb)




POSITIVE SIGN CONVENTION

FIGURE 18 - Plate fixed along one edge--Hinged along two opposite edges, moment and reaction coefficients, Load I, uniform load.

	y/b	R_x	$x/0$	M_x						M_y					
				0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	-0.005	0	-0.002	-0.003	-0.004	-0.005	-0.005	-0.005	0	0	0	0	0	0
	0.8	+0.0104	0	-0.005	-0.009	-0.012	-0.015	-0.014	-0.014	0	+0.000	+0.001	-0.001	+0.001	+0.001
	0.6	+0.0949	0	-0.020	-0.034	-0.045	-0.051	-0.053	-0.053	0	-0.005	-0.009	-0.012	-0.013	-0.014
	0.4	+1.251	0	-0.026	-0.045	-0.059	-0.067	-0.070	-0.070	0	-0.007	-0.012	-0.016	-0.018	-0.019
	0.2	+1.060	0	-0.021	-0.037	-0.048	-0.054	-0.056	-0.056	0	-0.007	-0.012	-0.016	-0.019	-0.020
	0	+0.0000	0	+0.005	+0.009	+0.012	+0.014	+0.015	+0.015	0	+0.025	+0.046	+0.061	+0.070	+0.073
	R_x	R_y		+0.0000	+0.0858	+0.1332	+0.1616	+0.1779	+0.1830						
$a/b = 1/4$	1.0	-0.012	0	-0.020	-0.039	-0.053	-0.062	-0.065	-0.065	0	0	0	0	0	0
	0.8	+0.0413	0	-0.031	-0.058	-0.078	-0.091	-0.095	-0.095	0	+0.001	+0.001	+0.001	+0.001	+0.001
	0.6	+1.802	0	-0.063	-0.110	-0.142	-0.161	-0.167	-0.167	0	-0.023	-0.041	-0.055	-0.063	-0.066
	0.4	+2.268	0	-0.072	-0.123	-0.157	-0.176	-0.183	-0.183	0	-0.032	-0.058	-0.077	-0.088	-0.092
	0.2	+1.272	0	-0.046	-0.075	-0.091	-0.100	-0.103	-0.103	0	-0.022	-0.039	-0.051	-0.058	-0.060
	0	-0.821	0	+0.019	+0.034	+0.045	+0.052	+0.054	+0.054	0	+0.094	+0.170	+0.225	+0.258	+0.269
	R_x	R_y		-0.0821	+0.1677	+0.2555	+0.3095	+0.3389	+0.3483						
$a/b = 3/8$	1.0	+0.0280	0	-0.060	-0.113	-0.154	-0.179	-0.188	-0.188	0	0	0	0	0	0
	0.8	+0.0821	0	-0.073	-0.134	-0.178	-0.206	-0.215	-0.215	0	-0.007	-0.014	-0.019	-0.023	-0.024
	0.6	+2.388	0	-0.108	-0.183	-0.232	-0.260	-0.269	-0.269	0	-0.051	-0.092	-0.121	-0.139	-0.145
	0.4	+2.770	0	-0.109	-0.177	-0.218	-0.240	-0.246	-0.246	0	-0.064	-0.115	-0.152	-0.174	-0.181
	0.2	+1.088	0	-0.060	-0.089	-0.101	-0.105	-0.106	-0.106	0	-0.025	-0.041	-0.049	-0.052	-0.053
	0	-1.488	0	+0.035	+0.063	+0.083	+0.095	+0.099	+0.099	0	+0.0173	+0.0314	+0.0416	+0.0477	+0.0497
	R_x	R_y		-1.488	+0.2333	+0.3475	+0.4166	+0.4538	+0.4655						
$a/b = 1/2$	1.0	+1.033	0	-0.102	-0.190	-0.255	-0.296	-0.309	-0.309	0	0	0	0	0	0
	0.8	+1.094	0	-0.112	-0.201	-0.265	-0.302	-0.315	-0.315	0	-0.019	-0.037	-0.053	-0.063	-0.067
	0.6	+2.693	0	-0.143	-0.235	-0.291	-0.321	-0.330	-0.330	0	-0.081	-0.144	-0.188	-0.215	-0.224
	0.4	+2.881	0	-0.133	-0.205	-0.241	-0.257	-0.262	-0.262	0	-0.090	-0.157	-0.202	-0.228	-0.237
	0.2	+0.677	0	-0.065	-0.084	-0.085	-0.082	-0.081	-0.081	0	-0.012	-0.009	+0.001	+0.010	+0.013
	0	-1.793	0	+0.055	+0.098	+0.128	+0.146	+0.151	+0.151	0	+0.0276	+0.0492	+0.0642	+0.0729	+0.0757
	R_x	R_y		-1.793	+0.2895	+0.4246	+0.5005	+0.5392	+0.5512						
$a/b = 3/4$	1.0	+3.075	0	-0.158	-0.281	-0.363	-0.409	-0.423	-0.423	0	0	0	0	0	0
	0.8	+1.194	0	-0.161	-0.273	-0.341	-0.376	-0.386	-0.386	0	-0.039	-0.076	-0.106	-0.124	-0.130
	0.6	+2.754	0	-0.185	-0.277	-0.320	-0.338	-0.343	-0.343	0	-0.121	-0.206	-0.260	-0.290	-0.299
	0.4	+2.675	0	-0.158	-0.211	-0.223	-0.223	-0.222	-0.222	0	-0.110	-0.175	-0.207	-0.220	-0.224
	0.2	+0.037	0	-0.060	-0.052	-0.031	-0.016	-0.011	-0.011	0	+0.044	+0.111	+0.175	+0.219	+0.234
	0	-1.906	0	+0.096	+0.166	+0.210	+0.235	+0.243	+0.243	0	+0.0482	+0.0828	+0.1052	+0.1176	+0.1216
	R_x	R_y		-1.906	+0.3764	+0.5274	+0.6009	+0.6352	+0.6452						
$a/b = 1$	1.0	+4.673	0	-0.184	-0.304	-0.366	-0.392	-0.399	-0.399	0	0	0	0	0	0
	0.8	+1.073	0	-0.184	-0.286	-0.329	-0.344	-0.346	-0.346	0	-0.048	-0.091	-0.120	-0.137	-0.142
	0.6	+2.619	0	-0.203	-0.273	-0.288	-0.287	-0.285	-0.285	0	-0.140	-0.220	-0.261	-0.277	-0.282
	0.4	+2.444	0	-0.165	-0.189	-0.175	-0.159	-0.154	-0.154	0	-0.107	-0.142	-0.140	-0.128	-0.122
	0.2	-0.251	0	-0.047	-0.012	+0.024	+0.047	+0.054	+0.054	0	+0.110	+0.248	+0.364	+0.438	+0.463
	0	-1.712	0	+0.133	+0.220	+0.273	+0.301	+0.310	+0.310	0	+0.0664	+0.1101	+0.1365	+0.1507	+0.1552
	R_x	R_y		-1.712	+0.4372	+0.5845	+0.6467	+0.6731	+0.6805						
$a/b = 3/2$	1.0	+6.045	0	-0.213	-0.285	-0.279	-0.257	-0.246	-0.246	0	0	0	0	0	0
	0.8	+0.865	0	-0.209	-0.258	-0.241	-0.214	-0.204	-0.204	0	-0.057	-0.092	-0.102	-0.102	-0.100
	0.6	+2.515	0	-0.217	-0.230	-0.196	-0.165	-0.154	-0.154	0	-0.156	-0.200	-0.193	-0.177	-0.170
	0.4	+2.339	0	-0.161	-0.131	-0.085	-0.054	-0.043	-0.043	0	-0.087	-0.048	+0.020	+0.071	+0.090
	0.2	-0.201	0	-0.016	+0.053	+0.104	+0.131	+0.140	+0.140	0	+0.233	+0.477	+0.651	+0.750	+0.782
	0	-1.167	0	+0.190	+0.295	+0.350	+0.378	+0.386	+0.386	0	+0.0952	+0.1474	+0.1752	+0.1888	+0.1929
	R_x	R_y		-1.167	+0.5160	+0.6384	+0.6754	+0.6867	+0.6891						

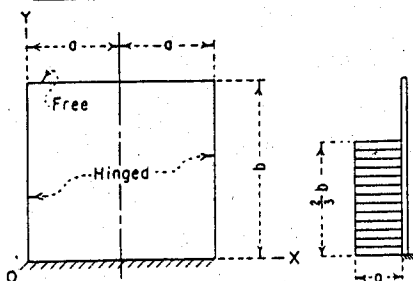


Moment = (Coefficient) (pb^2)
Reaction = (Coefficient) (pb)




POSITIVE SIGN CONVENTION

FIGURE 19 - Plate fixed along one edge--Hinged along two opposite edges, moment and reaction coefficients, Load II, $2/3$ uniform load.

	y/b	R_x	x/a	M_x						M_y					
				0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	-0.0001	0	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	0	0	0	0	0	0
	0.8	+0.0001	0	-0.0000	-0.0000	-0.0001	-0.0001	-0.0001	-0.0001	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	+0.0011	0	-0.0001	-0.0003	-0.0003	-0.0004	-0.0004	-0.0004	0	+0.0000	+0.0001	+0.0001	+0.0001	+0.0001
	0.4	+0.0304	0	-0.0007	-0.0013	-0.0017	-0.0020	-0.0021	-0.0021	0	-0.0001	-0.0002	-0.0003	-0.0003	-0.0003
	0.2	+0.0966	0	-0.0017	-0.0030	-0.0038	-0.0043	-0.0044	-0.0044	0	-0.0007	-0.0013	-0.0017	-0.0020	-0.0021
	0	+0.0059	0	+0.0005	+0.0008	+0.0011	+0.0013	+0.0013	+0.0013	0	+0.0023	+0.0042	+0.0055	+0.0063	+0.0066
	R_x	R_y		+0.0059	+0.0830	+0.1263	+0.1528	+0.1672	+0.1717						
$a/b = 1/4$	1.0	-0.0024	0	-0.0002	-0.0004	-0.0006	-0.0007	-0.0007	-0.0008	0	0	0	0	0	0
	0.8	+0.0019	0	-0.0004	-0.0007	-0.0010	-0.0012	-0.0012	-0.0012	0	+0.0001	+0.0002	+0.0002	+0.0003	+0.0003
	0.6	+0.0099	0	-0.0009	-0.0016	-0.0022	-0.0025	-0.0027	-0.0027	0	+0.0000	+0.0001	+0.0001	+0.0001	+0.0001
	0.4	+0.0614	0	-0.0021	-0.0036	-0.0046	-0.0052	-0.0054	-0.0054	0	-0.0008	-0.0015	-0.0021	-0.0024	-0.0025
	0.2	+0.1193	0	-0.0031	-0.0047	-0.0055	-0.0059	-0.0060	-0.0060	0	-0.0024	-0.0042	-0.0054	-0.0062	-0.0064
	0	-0.0327	0	+0.0013	+0.0023	+0.0030	+0.0034	+0.0034	+0.0035	0	+0.0065	+0.0115	+0.0150	+0.0170	+0.0177
	R_x	R_y		-0.0327	+0.1414	+0.2062	+0.2421	+0.2603	+0.2659						
$a/b = 3/8$	1.0	-0.0026	0	-0.0009	-0.0017	-0.0023	-0.0027	-0.0028	-0.0028	0	0	0	0	0	0
	0.8	+0.0080	0	-0.0011	-0.0021	-0.0028	-0.0033	-0.0034	-0.0034	0	+0.0001	+0.0001	+0.0002	+0.0002	+0.0002
	0.6	+0.0207	0	-0.0017	-0.0031	-0.0041	-0.0047	-0.0049	-0.0049	0	-0.0003	-0.0005	-0.0008	-0.0009	-0.0010
	0.4	+0.0759	0	-0.0030	-0.0050	-0.0060	-0.0066	-0.0067	-0.0067	0	-0.0018	-0.0033	-0.0045	-0.0052	-0.0054
	0.2	+0.1236	0	-0.0039	-0.0052	-0.0054	-0.0054	-0.0053	-0.0053	0	-0.0034	-0.0057	-0.0071	-0.0079	-0.0081
	0	-0.0496	0	+0.0019	+0.0033	+0.0043	+0.0048	+0.0050	+0.0050	0	+0.0094	+0.0166	+0.0214	+0.0242	+0.0250
	R_x	R_y		-0.0496	+0.1783	+0.2458	+0.2806	+0.2970	+0.3018						
$a/b = 1/2$	1.0	+0.0058	0	-0.0015	-0.0029	-0.0039	-0.0046	-0.0048	-0.0048	0	0	0	0	0	0
	0.8	+0.0128	0	-0.0017	-0.0032	-0.0043	-0.0050	-0.0052	-0.0052	0	-0.0001	-0.0002	-0.0003	-0.0004	-0.0004
	0.6	+0.0263	0	-0.0023	-0.0040	-0.0052	-0.0058	-0.0060	-0.0060	0	-0.0007	-0.0013	-0.0019	-0.0023	-0.0024
	0.4	+0.0788	0	-0.0036	-0.0054	-0.0062	-0.0065	-0.0065	-0.0065	0	-0.0026	-0.0047	-0.0062	-0.0071	-0.0073
	0.2	+0.1174	0	-0.0042	-0.0048	-0.0045	-0.0041	-0.0040	-0.0040	0	-0.0039	-0.0061	-0.0070	-0.0073	-0.0074
	0	-0.0477	0	+0.0026	+0.0045	+0.0056	+0.0062	+0.0063	+0.0063	0	+0.0131	+0.0223	+0.0279	+0.0308	+0.0317
	R_x	R_y		-0.0477	+0.2064	+0.2746	+0.3043	+0.3166	+0.3200						
$a/b = 3/4$	1.0	+0.0340	0	-0.0024	-0.0043	-0.0056	-0.0064	-0.0066	-0.0066	0	0	0	0	0	0
	0.8	+0.0148	0	-0.0025	-0.0043	-0.0055	-0.0061	-0.0062	-0.0062	0	-0.0003	-0.0008	-0.0012	-0.0015	-0.0016
	0.6	+0.0267	0	-0.0030	-0.0047	-0.0055	-0.0058	-0.0058	-0.0058	0	-0.0012	-0.0024	-0.0034	-0.0040	-0.0042
	0.4	+0.0752	0	-0.0043	-0.0054	-0.0054	-0.0052	-0.0051	-0.0051	0	-0.0036	-0.0059	-0.0073	-0.0079	-0.0080
	0.2	+0.1134	0	-0.0043	-0.0037	-0.0028	-0.0022	-0.0020	-0.0020	0	-0.0042	-0.0051	-0.0046	-0.0040	-0.0038
	0	-0.0337	0	+0.0039	+0.0062	+0.0074	+0.0080	+0.0081	+0.0081	0	+0.0196	+0.0309	+0.0369	+0.0398	+0.0406
	R_x	R_y		-0.0337	+0.2458	+0.3060	+0.3256	+0.3322	+0.3338						
$a/b = 1$	1.0	+0.0569	0	-0.0027	-0.0046	-0.0056	-0.0060	-0.0061	-0.0061	0	0	0	0	0	0
	0.8	+0.0131	0	-0.0028	-0.0045	-0.0052	-0.0054	-0.0054	-0.0054	0	-0.0004	-0.0010	-0.0015	-0.0018	-0.0019
	0.6	+0.0233	0	-0.0034	-0.0046	-0.0048	-0.0047	-0.0046	-0.0046	0	-0.0014	-0.0028	-0.0036	-0.0041	-0.0042
	0.4	+0.0711	0	-0.0045	-0.0048	-0.0042	-0.0038	-0.0036	-0.0036	0	-0.0041	-0.0061	-0.0067	-0.0068	-0.0067
	0.2	+0.1190	0	-0.0039	-0.0026	-0.0015	-0.0009	-0.0007	-0.0007	0	-0.0040	-0.0034	-0.0017	-0.0005	-0.0001
	0	-0.0171	0	+0.0050	+0.0074	+0.0085	+0.0091	+0.0092	+0.0092	0	+0.0248	+0.0369	+0.0426	+0.0453	+0.0461
	R_x	R_y		-0.0171	+0.2705	+0.3201	+0.3328	+0.3367	+0.3376						
$a/b = 3/2$	1.0	+0.0765	0	-0.0032	-0.0043	-0.0042	-0.0038	-0.0036	-0.0036	0	0	0	0	0	0
	0.8	+0.0102	0	-0.0033	-0.0041	-0.0037	-0.0032	-0.0030	-0.0030	0	-0.0005	-0.0011	-0.0014	-0.0014	-0.0014
	0.6	+0.0180	0	-0.0037	-0.0039	-0.0032	-0.0026	-0.0024	-0.0024	0	-0.0018	-0.0028	-0.0029	-0.0028	-0.0027
	0.4	+0.0688	0	-0.0044	-0.0036	-0.0025	-0.0019	-0.0017	-0.0017	0	-0.0046	-0.0053	-0.0047	-0.0040	-0.0037
	0.2	+0.1465	0	-0.0030	-0.0011	+0.0000	+0.0005	+0.0007	+0.0007	0	-0.0030	-0.0001	+0.0026	+0.0042	+0.0046
	0	+0.0106	0	+0.0064	+0.0088	+0.0098	+0.0102	+0.0103	+0.0103	0	+0.0321	+0.0439	+0.0488	+0.0510	+0.0516
	R_y			+0.0106	+0.2977	+0.3305	+0.3360	+0.3372	+0.3374						

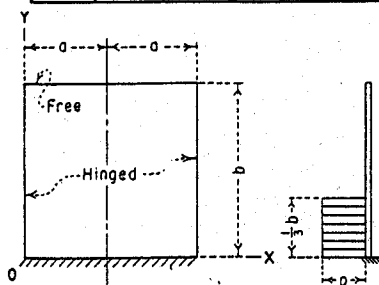



Moment = (Coefficient) (pb^2)
Reaction = (Coefficient) (pb)




POSITIVE SIGN CONVENTION

FIGURE 20 - Plate fixed along one edge--Hinged along two opposite edges, moment and reaction coefficients, Load III, $1/3$ uniform load.

	y/b	x/a	M_x						M_y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	+0.0094	0	-0.0003	-0.0006	-0.0008	-0.0010	-0.0010	0	0	0	0	0	0
	0.8	+0.0253	0	-0.0006	-0.0011	-0.0015	-0.0017	-0.0017	0	-0.0001	-0.0002	-0.0002	-0.0002	-0.0003
	0.6	+0.0500	0	-0.0011	-0.0020	-0.0026	-0.0030	-0.0031	0	-0.0002	-0.0004	-0.0005	-0.0006	-0.0006
	0.4	+0.0758	0	-0.0016	-0.0028	-0.0037	-0.0042	-0.0044	0	-0.0004	-0.0007	-0.0009	-0.0011	-0.0011
	0.2	+0.0833	0	-0.0015	-0.0028	-0.0036	-0.0041	-0.0042	0	-0.0006	-0.0010	-0.0013	-0.0015	-0.0016
	0	+0.0043	0	+0.0004	+0.0008	+0.0010	+0.0012	+0.0012	0	+0.0021	+0.0039	+0.0051	+0.0058	+0.0061
	R_x/R_y		+0.0043	+0.0075	+0.0180	+0.0147	+0.0155	+0.0159						
$a/b = 1/4$	1.0	+0.0249	0	-0.0022	-0.0040	-0.0054	-0.0062	-0.0065	0	0	0	0	0	0
	0.8	+0.0548	0	-0.0028	-0.0051	-0.0067	-0.0077	-0.0081	0	-0.0004	-0.0006	-0.0008	-0.0010	-0.0010
	0.6	+0.1014	0	-0.0040	-0.0070	-0.0091	-0.0104	-0.0108	0	-0.0012	-0.0021	-0.0028	-0.0032	-0.0033
	0.4	+0.1388	0	-0.0046	-0.0078	-0.0100	-0.0113	-0.0117	0	-0.0019	-0.0034	-0.0046	-0.0052	-0.0055
	0.2	+0.1003	0	-0.0333	-0.0053	-0.0065	-0.0071	-0.0072	0	-0.0018	-0.0031	-0.0041	-0.0046	-0.0048
	0	-0.0513	0	+0.0014	+0.0025	+0.0033	+0.0038	+0.0040	0	+0.0071	+0.0127	+0.0167	+0.0191	+0.0199
	R_x/R_y		-0.0513	+0.1404	+0.2080	+0.2476	+0.2688	+0.2754						
$a/b = 3/8$	1.0	+0.0631	0	-0.0054	-0.0099	-0.0133	-0.0154	-0.0160	0	0	0	0	0	0
	0.8	+0.0852	0	-0.0060	-0.0108	-0.0142	-0.0163	-0.0170	0	-0.0011	-0.0020	-0.0026	-0.0030	-0.0031
	0.6	+0.1388	0	-0.0071	-0.0122	-0.0156	-0.0176	-0.0183	0	-0.0027	-0.0050	-0.0066	-0.0076	-0.0079
	0.4	+0.1701	0	-0.0070	-0.0116	-0.0143	-0.0158	-0.0162	0	-0.0038	-0.0069	-0.0091	-0.0104	-0.0108
	0.2	+0.0890	0	-0.0044	-0.0064	-0.0071	-0.0074	-0.0074	0	-0.0021	-0.0033	-0.0040	-0.0043	-0.0044
	0	-0.0960	0	+0.0025	+0.0045	+0.0059	+0.0068	+0.0071	0	+0.0124	+0.0225	+0.0296	+0.0339	+0.0353
	R_x/R_y		-0.0960	+0.1886	+0.2717	+0.3203	+0.3458	+0.3538						
$a/b = 1/2$	1.0	+0.1322	0	-0.0087	-0.0159	-0.0210	-0.0241	-0.0252	0	0	0	0	0	0
	0.8	+0.1049	0	-0.0090	-0.0159	-0.0207	-0.0235	-0.0244	0	-0.0021	-0.0038	-0.0050	-0.0058	-0.0061
	0.6	+0.1584	0	-0.0096	-0.0161	-0.0201	-0.0224	-0.0231	0	-0.0045	-0.0080	-0.0106	-0.0121	-0.0127
	0.4	+0.1757	0	-0.0087	-0.0136	-0.0161	-0.0173	-0.0176	0	-0.0053	-0.0092	-0.0119	-0.0134	-0.0139
	0.2	+0.0595	0	-0.0047	-0.0060	-0.0060	-0.0058	-0.0057	0	-0.0011	-0.0010	-0.0004	-0.0002	-0.0005
	0	-0.1169	0	+0.0040	+0.0070	+0.0091	+0.0103	+0.0107	0	+0.0198	+0.0351	+0.0455	+0.0515	+0.0535
	R_x/R_y		-0.1169	+0.2296	+0.3261	+0.3786	+0.4050	+0.4130						
$a/b = 3/4$	1.0	+0.3017	0	-0.0132	-0.0230	-0.0292	-0.0326	-0.0337	0	0	0	0	0	0
	0.8	+0.1125	0	-0.0129	-0.0214	-0.0265	-0.0291	-0.0299	0	-0.0036	-0.0065	-0.0086	-0.0098	-0.0102
	0.6	+0.1595	0	-0.0126	-0.0194	-0.0227	-0.0242	-0.0246	0	-0.0066	-0.0114	-0.0145	-0.0162	-0.0168
	0.4	+0.1576	0	-0.0104	-0.0142	-0.0151	-0.0152	-0.0152	0	-0.0060	-0.0093	-0.0109	-0.0114	-0.0115
	0.2	+0.0115	0	-0.0043	-0.0036	-0.0021	-0.0011	-0.0007	0	+0.0030	+0.0080	+0.0128	+0.0161	+0.0172
	0	-0.1259	0	+0.0070	+0.0119	+0.0151	+0.0168	+0.0174	0	+0.0348	+0.0594	+0.0763	+0.0842	+0.0871
	R_x/R_y		-0.1259	+0.2925	+0.3991	+0.4504	+0.4744	+0.4816						
$a/b = 1$	1.0	+0.4312	0	-0.0154	-0.0247	-0.0293	-0.0312	-0.0317	0	0	0	0	0	0
	0.8	+0.1046	0	-0.0147	-0.0224	-0.0256	-0.0268	-0.0270	0	-0.0043	-0.0073	-0.0093	-0.0103	-0.0106
	0.6	+0.1468	0	-0.0139	-0.0191	-0.0205	-0.0205	-0.0204	0	-0.0073	-0.0115	-0.0135	-0.0143	-0.0145
	0.4	+0.1380	0	-0.0109	-0.0125	-0.0117	-0.0107	-0.0103	0	-0.0050	-0.0059	-0.0048	-0.0035	-0.0029
	0.2	-0.0109	0	-0.0032	-0.0006	+0.0020	+0.0036	+0.0041	0	+0.0082	+0.0186	+0.0275	+0.0331	+0.0350
	0	-0.1123	0	+0.0096	+0.0159	+0.0198	+0.0219	+0.0226	0	+0.0482	+0.0797	+0.0990	+0.1094	+0.1128
	R_x/R_y		-0.1123	+0.3359	+0.4399	+0.4841	+0.5035	+0.5090						
$a/b = 3/2$	1.0	+0.5418	0	-0.0175	-0.0229	-0.0223	-0.0205	-0.0197	0	0	0	0	0	0
	0.8	+0.0931	0	-0.0164	-0.0201	-0.0188	-0.0168	-0.0160	0	-0.0048	-0.0069	-0.0073	-0.0070	-0.0069
	0.6	+0.1335	0	-0.0149	-0.0160	-0.0135	-0.0113	-0.0105	0	-0.0073	-0.0086	-0.0073	-0.0056	-0.0050
	0.4	+0.1257	0	-0.0104	-0.0083	-0.0050	-0.0027	-0.0019	0	-0.0023	+0.0026	+0.0086	+0.0129	+0.0144
	0.2	-0.0072	0	-0.0008	+0.0043	+0.0080	+0.0101	+0.0108	0	+0.0178	+0.0365	+0.0501	+0.0579	+0.0604
	0	-0.0724	0	+0.0139	+0.0216	+0.0258	+0.0279	+0.0285	0	+0.0694	+0.1079	+0.1289	+0.1394	+0.1426
	R_y		-0.0724	+0.3914	+0.4785	+0.5060	+0.5149	+0.5169						




Moment = (Coefficient) (pb^2)
Reaction = (Coefficient) (pb)



POSITIVE SIGN CONVENTION


FIGURE 21 - Plate fixed along one edge--Hinged along two opposite edges, moment and reaction coefficients, Load IV, uniformly varying load.

	y/b	R_x	x/a	M_x						M_y					
				0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	-0.0004	0	-0.0000	-0.0000	-0.0001	-0.0001	-0.0001	-0.0001	0	0	0	0	0	0
	0.8	+0.0007	0	-0.0001	-0.0001	-0.0002	-0.0002	-0.0002	-0.0002	0	+0.0000	+0.0000	+0.0001	+0.0001	+0.0001
	0.6	+0.0152	0	-0.0004	-0.0007	-0.0010	-0.0011	-0.0012	-0.0012	0	-0.0000	-0.0001	-0.0001	-0.0001	-0.0001
	0.4	+0.0508	0	-0.0011	-0.0019	-0.0024	-0.0028	-0.0029	-0.0029	0	-0.0003	-0.0005	-0.0006	-0.0007	-0.0008
	0.2	+0.0721	0	-0.0013	-0.0023	-0.0030	-0.0030	-0.0034	-0.0035	0	-0.0005	-0.0009	-0.0012	-0.0013	-0.0014
	0	+0.0065	0	+0.0004	+0.0007	+0.0009	+0.0010	+0.0010	+0.0011	0	+0.0019	+0.0035	+0.0046	+0.0052	+0.0055
	R_x	R_y		+0.0065	+0.0740	+0.1100	+0.1316	+0.1436	+0.1476						
$a/b = 1/4$	1.0	-0.0025	0	-0.0005	-0.0009	-0.0013	-0.0015	-0.0015	-0.0015	0	0	0	0	0	0
	0.8	+0.0067	0	-0.0008	-0.0014	-0.0019	-0.0023	-0.0024	-0.0024	0	+0.0001	+0.0002	+0.0003	+0.0003	+0.0003
	0.6	+0.0365	0	-0.0017	-0.0030	-0.0039	-0.0045	-0.0047	-0.0047	0	-0.0003	-0.0006	-0.0008	-0.0010	-0.0010
	0.4	+0.0915	0	-0.0028	-0.0048	-0.0061	-0.0069	-0.0071	-0.0071	0	-0.0013	-0.0024	-0.0032	-0.0037	-0.0038
	0.2	+0.0885	0	-0.0026	-0.0041	-0.0049	-0.0053	-0.0054	-0.0054	0	-0.0016	-0.0029	-0.0038	-0.0043	-0.0045
	0	-0.0314	0	+0.0011	+0.0020	+0.0026	+0.0030	+0.0031	+0.0031	0	+0.0057	+0.0102	+0.0132	+0.0150	+0.0156
	R_x	R_y		-0.0314	+0.1250	+0.1807	+0.2119	+0.2282	+0.2330						
$a/b = 3/8$	1.0	+0.0015	0	-0.0016	-0.0030	-0.0040	-0.0047	-0.0050	-0.0050	0	0	0	0	0	0
	0.8	+0.0177	0	-0.0019	-0.0036	-0.0048	-0.0056	-0.0059	-0.0059	0	-0.0000	-0.0001	-0.0001	-0.0001	-0.0002
	0.6	+0.0531	0	-0.0030	-0.0052	-0.0067	-0.0076	-0.0079	-0.0079	0	-0.0010	-0.0019	-0.0025	-0.0029	-0.0031
	0.4	+0.1106	0	-0.0041	-0.0066	-0.0081	-0.0088	-0.0090	-0.0090	0	-0.0027	-0.0048	-0.0063	-0.0072	-0.0075
	0.2	+0.0876	0	-0.0033	-0.0046	-0.0050	-0.0051	-0.0051	-0.0051	0	-0.0023	-0.0038	-0.0047	-0.0052	-0.0053
	0	-0.0539	0	+0.0018	+0.0032	+0.0041	+0.0047	+0.0049	+0.0049	0	+0.0089	+0.0158	+0.0206	+0.0234	+0.0243
	R_x	R_y		-0.0539	+0.1596	+0.2213	+0.2550	+0.2718	+0.2769						
$a/b = 1/2$	1.0	+0.0192	0	-0.0027	-0.0051	-0.0069	-0.0080	-0.0084	-0.0084	0	0	0	0	0	0
	0.8	+0.0256	0	-0.0030	-0.0055	-0.0073	-0.0084	-0.0088	-0.0088	0	-0.0003	-0.0007	-0.0010	-0.0012	-0.0013
	0.6	+0.0622	0	-0.0040	-0.0067	-0.0085	-0.0094	-0.0097	-0.0097	0	-0.0018	-0.0033	-0.0045	-0.0052	-0.0055
	0.4	+0.1150	0	-0.0049	-0.0074	-0.0086	-0.0090	-0.0091	-0.0091	0	-0.0037	-0.0065	-0.0084	-0.0095	-0.0099
	0.2	+0.0760	0	-0.0036	-0.0044	-0.0042	-0.0039	-0.0038	-0.0038	0	-0.0023	-0.0033	-0.0037	-0.0037	-0.0037
	0	-0.0580	0	+0.0026	+0.0045	+0.0058	+0.0064	+0.0067	+0.0067	0	+0.0130	+0.0226	+0.0288	+0.0322	+0.0333
	R_x	R_y		-0.0580	+0.1869	+0.2529	+0.2851	+0.2999	+0.3042						
$a/b = 3/4$	1.0	+0.0720	0	-0.0042	-0.0076	-0.0099	-0.0111	-0.0115	-0.0115	0	0	0	0	0	0
	0.8	+0.0287	0	-0.0043	-0.0075	-0.0094	-0.0104	-0.0107	-0.0107	0	-0.0008	-0.0017	-0.0025	-0.0030	-0.0032
	0.6	+0.0634	0	-0.0052	-0.0079	-0.0092	-0.0097	-0.0098	-0.0098	0	-0.0029	-0.0052	-0.0068	-0.0077	-0.0080
	0.4	+0.1099	0	-0.0058	-0.0075	-0.0077	-0.0075	-0.0074	-0.0074	0	-0.0049	-0.0078	-0.0094	-0.0101	-0.0103
	0.2	+0.0614	0	-0.0036	-0.0031	-0.0022	-0.0015	-0.0013	-0.0013	0	-0.0013	-0.0005	+0.0010	+0.0021	+0.0026
	0	-0.0506	0	+0.0042	+0.0068	+0.0084	+0.0092	+0.0094	+0.0094	0	+0.0208	+0.0340	+0.0418	+0.0459	+0.0471
	R_x	R_y		-0.0506	+0.2266	+0.2910	+0.3166	+0.3271	+0.3300						
$a/b = 1$	1.0	+0.1140	0	-0.0049	-0.0082	-0.0099	-0.0106	-0.0108	-0.0108	0	0	0	0	0	0
	0.8	+0.0254	0	-0.0050	-0.0078	-0.0090	-0.0094	-0.0095	-0.0095	0	-0.0010	-0.0021	-0.0030	-0.0035	-0.0036
	0.6	+0.0586	0	-0.0057	-0.0078	-0.0082	-0.0080	-0.0080	-0.0080	0	-0.0034	-0.0057	-0.0070	-0.0076	-0.0078
	0.4	+0.1043	0	-0.0061	-0.0067	-0.0061	-0.0055	-0.0053	-0.0053	0	-0.0053	-0.0075	-0.0080	-0.0078	-0.0077
	0.2	+0.0590	0	-0.0031	-0.0017	-0.0004	+0.0004	+0.0007	+0.0007	0	+0.0001	+0.0030	+0.0061	+0.0082	+0.0089
	0	-0.0362	0	+0.0054	+0.0085	+0.0102	+0.0110	+0.0113	+0.0113	0	+0.0272	+0.0426	+0.0510	+0.0552	+0.0565
	R_x	R_y		-0.0362	+0.2528	+0.3102	+0.3295	+0.3367	+0.3386						
$a/b = 3/2$	1.0	+0.1502	0	-0.0057	-0.0077	-0.0075	-0.0069	-0.0066	-0.0066	0	0	0	0	0	0
	0.8	+0.0198	0	-0.0057	-0.0071	-0.0065	-0.0058	-0.0054	-0.0054	0	-0.0012	-0.0022	-0.0026	-0.0026	-0.0026
	0.6	+0.0526	0	-0.0062	-0.0065	-0.0055	-0.0046	-0.0042	-0.0042	0	-0.0039	-0.0054	-0.0055	-0.0054	-0.0049
	0.4	+0.1036	0	-0.0060	-0.0049	-0.0034	-0.0024	-0.0021	-0.0021	0	-0.0054	-0.0055	-0.0040	-0.0027	-0.0022
	0.2	+0.0748	0	-0.0020	+0.0004	+0.0020	+0.0028	+0.0030	+0.0030	0	+0.0029	+0.0091	+0.0139	+0.0166	+0.0174
	0	-0.0083	0	+0.0074	+0.0107	+0.0123	+0.0131	+0.0133	+0.0133	0	+0.0369	+0.0537	+0.0617	+0.0654	+0.0666
	R_x	R_y		-0.0083	+0.2838	+0.3265	+0.3366	+0.3393	+0.3398						

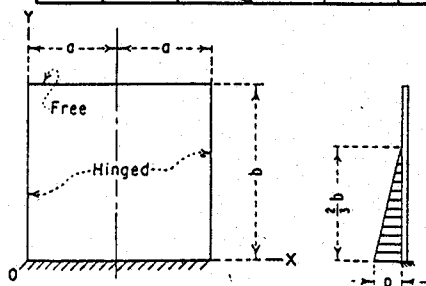

Moment = (Coefficient)(pb²)


Reaction = (Coefficient)(pb)



POSITIVE SIGN CONVENTION


FIGURE 22 - Plate fixed along one edge--Hinged along two opposite edges, moment and reaction coefficients, Load V , $2/3$ uniformly varying load.

	y/b	x/a	M_x						M_y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	0.0000	0	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	0	0	0	0	0	0
	0.8	-0.0002	0	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	+0.0001	0	-0.0000	-0.0001	-0.0001	-0.0001	-0.0001	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.4	+0.0057	0	-0.0002	-0.0003	-0.0005	-0.0005	-0.0006	0	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000
	0.2	+0.0395	0	-0.0007	-0.0011	-0.0015	-0.0016	-0.0017	0	-0.0003	-0.0005	-0.0006	-0.0007	-0.0007
	0	+0.0111	0	+0.0003	+0.0005	+0.0006	+0.0007	+0.0008	0	+0.0014	+0.0025	+0.0032	+0.0037	+0.0038
	R_x/R_y	+0.0111	+0.0616	+0.0896	+0.1043	+0.1125	+0.1149							
$a/b = 1/4$	1.0	-0.0008	0	-0.0001	-0.0001	-0.0002	-0.0002	-0.0002	0	0	0	0	0	0
	0.8	+0.0004	0	-0.0001	-0.0002	-0.0003	-0.0003	-0.0003	0	+0.0000	+0.0001	+0.0001	+0.0001	+0.0001
	0.6	+0.0030	0	-0.0002	-0.0005	-0.0006	-0.0007	-0.0008	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.4	+0.0133	0	-0.0006	-0.0010	-0.0013	-0.0015	-0.0015	0	-0.0002	-0.0003	-0.0004	-0.0005	-0.0005
	0.2	+0.0488	0	-0.0012	-0.0017	-0.0020	-0.0021	-0.0022	0	-0.0009	-0.0015	-0.0020	-0.0023	-0.0024
	0	-0.0008	0	+0.0006	+0.0011	+0.0014	+0.0016	+0.0016	0	+0.0032	+0.0055	+0.0070	+0.0078	+0.0080
	R_x/R_y	-0.0008	+0.0923	+0.1244	+0.1400	+0.1472	+0.1493							
$a/b = 3/8$	1.0	-0.0010	0	-0.0002	-0.0004	-0.0006	-0.0007	-0.0008	0	0	0	0	0	0
	0.8	+0.0020	0	-0.0003	-0.0006	-0.0008	-0.0009	-0.0010	0	+0.0000	+0.0001	+0.0001	+0.0001	+0.0001
	0.6	+0.0051	0	-0.0005	-0.0009	-0.0012	-0.0013	-0.0014	0	-0.0000	-0.0001	-0.0001	-0.0002	-0.0002
	0.4	+0.0174	0	-0.0008	-0.0014	-0.0017	-0.0019	-0.0019	0	-0.0004	-0.0008	-0.0010	-0.0012	-0.0013
	0.2	+0.0529	0	-0.0015	-0.0019	-0.0020	-0.0019	-0.0019	0	-0.0013	-0.0022	-0.0028	-0.0031	-0.0032
	0	-0.0047	0	+0.0008	+0.0014	+0.0018	+0.0020	+0.0020	0	+0.0040	+0.0069	+0.0088	+0.0098	+0.0101
	R_x/R_y	-0.0047	+0.1091	+0.1384	+0.1518	+0.1577	+0.1593							
$a/b = 1/2$	1.0	+0.0010	0	-0.0004	-0.0008	-0.0011	-0.0012	-0.0013	0	0	0	0	0	0
	0.8	+0.0033	0	-0.0005	-0.0009	-0.0012	-0.0014	-0.0014	0	-0.0000	-0.0000	-0.0001	-0.0001	-0.0001
	0.6	+0.0066	0	-0.0006	-0.0011	-0.0014	-0.0016	-0.0017	0	-0.0001	-0.0003	-0.0004	-0.0005	-0.0006
	0.4	+0.0181	0	-0.0010	-0.0015	-0.0018	-0.0018	-0.0018	0	-0.0006	-0.0011	-0.0015	-0.0018	-0.0018
	0.2	+0.0515	0	-0.0016	-0.0018	-0.0016	-0.0015	-0.0014	0	-0.0016	-0.0024	-0.0029	-0.0030	-0.0031
	0	-0.0009	0	+0.0011	+0.0018	+0.0022	+0.0024	+0.0024	0	+0.0054	+0.0089	+0.0109	+0.0119	+0.0122
	R_x/R_y	-0.0009	+0.1211	+0.1488	+0.1593	+0.1632	+0.1642							
$a/b = 3/4$	1.0	+0.0083	0	-0.0006	-0.0012	-0.0015	-0.0017	-0.0018	0	0	0	0	0	0
	0.8	+0.0038	0	-0.0007	-0.0012	-0.0015	-0.0016	-0.0017	0	-0.0001	-0.0002	-0.0003	-0.0004	-0.0004
	0.6	+0.0068	0	-0.0008	-0.0013	-0.0015	-0.0016	-0.0016	0	-0.0003	-0.0006	-0.0008	-0.0010	-0.0011
	0.4	+0.0168	0	-0.0012	-0.0015	-0.0015	-0.0014	-0.0014	0	-0.0008	-0.0015	-0.0018	-0.0020	-0.0021
	0.2	+0.0518	0	-0.0016	-0.0014	-0.0011	-0.0008	-0.0008	0	-0.0018	-0.0023	-0.0023	-0.0022	-0.0021
	0	+0.0087	0	+0.0015	+0.0023	+0.0027	+0.0029	+0.0029	0	+0.0077	+0.0117	+0.0136	+0.0144	+0.0147
	R_x/R_y	+0.0087	+0.1369	+0.1593	+0.1652	+0.1669	+0.1673							
$a/b = 1$	1.0	+0.0142	0	-0.0007	-0.0012	-0.0015	-0.0016	-0.0016	0	0	0	0	0	0
	0.8	+0.0034	0	-0.0008	-0.0012	-0.0014	-0.0014	-0.0014	0	-0.0001	-0.0002	-0.0004	-0.0005	-0.0005
	0.6	+0.0059	0	-0.0009	-0.0013	-0.0013	-0.0013	-0.0012	0	-0.0003	-0.0007	-0.0009	-0.0010	-0.0011
	0.4	+0.0152	0	-0.0013	-0.0013	-0.0012	-0.0010	-0.0010	0	-0.0010	-0.0015	-0.0017	-0.0017	-0.0017
	0.2	+0.0554	0	-0.0015	-0.0010	-0.0007	-0.0005	-0.0004	0	-0.0019	-0.0020	-0.0016	-0.0013	-0.0011
	0	+0.0179	0	+0.0019	+0.0027	+0.0030	+0.0032	+0.0032	0	+0.0095	+0.0135	+0.0152	+0.0159	+0.0161
	R_x/R_y	+0.0179	+0.1462	+0.1635	+0.1669	+0.1678	+0.1680							
$a/b = 3/2$	1.0	+0.0193	0	-0.0009	-0.0012	-0.0011	-0.0010	-0.0009	0	0	0	0	0	0
	0.8	+0.0026	0	-0.0009	-0.0011	-0.0010	-0.0008	-0.0008	0	-0.0001	-0.0003	-0.0003	-0.0004	-0.0004
	0.6	+0.0046	0	-0.0010	-0.0010	-0.0008	-0.0007	-0.0006	0	-0.0004	-0.0007	-0.0007	-0.0007	-0.0007
	0.4	+0.0135	0	-0.0013	-0.0010	-0.0007	-0.0005	-0.0004	0	-0.0011	-0.0014	-0.0012	-0.0010	-0.0010
	0.2	+0.0679	0	-0.0012	-0.0006	-0.0002	-0.0001	-0.0000	0	-0.0018	-0.0011	-0.0004	-0.0000	+0.0001
	0	+0.0320	0	+0.0024	+0.0031	+0.0034	+0.0035	+0.0035	0	+0.0119	+0.0155	+0.0168	+0.0174	+0.0175
	R_x/R_y	+0.0320	+0.1557	+0.1662	+0.1675	+0.1677	+0.1678							

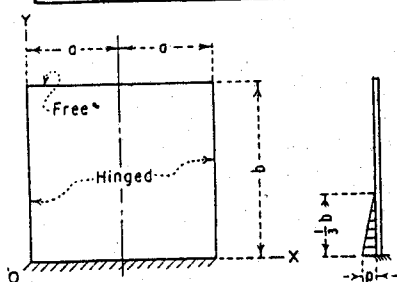

$$\text{Moment} = (\text{Coefficient})(pb^2)$$


$$\text{Reaction} = (\text{Coefficient})(pb)$$




POSITIVE SIGN CONVENTION

FIGURE 23 - Plate fixed along one edge--Hinged along two opposite edges, moment and reaction coefficients, Load VI, $1/3$ uniformly varying load.

	y/b	x/a	M_x						M_y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	-0.0000	0	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	0	0	0	0	0	0
	0.8	-0.0000	0	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	-0.0000	0	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.4	+0.0002	0	-0.0000	-0.0001	-0.0001	-0.0001	-0.0001	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.2	+0.0134	0	-0.0002	-0.0003	-0.0004	-0.0004	-0.0004	0	-0.0001	-0.0001	-0.0001	-0.0001	-0.0001
	0	+0.0103	0	+0.0002	+0.0003	+0.0004	+0.0004	+0.0004	0	+0.0008	+0.0014	+0.0018	+0.0020	+0.0020
	R_x/R_y	+0.0103	+0.0439	+0.0630	+0.0699	+0.0739	+0.0750							
$a/b = 1/4$	1.0	-0.0002	0	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000	0	0	0	0	0	0
	0.8	+0.0000	0	-0.0000	-0.0000	-0.0001	-0.0001	-0.0001	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	+0.0007	0	-0.0000	-0.0001	-0.0001	-0.0001	-0.0002	0	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000
	0.4	+0.0015	0	-0.0001	-0.0002	-0.0002	-0.0003	-0.0003	0	-0.0000	-0.0000	-0.0000	-0.0000	-0.0000
	0.2	+0.0124	0	-0.0002	-0.0004	-0.0004	-0.0004	-0.0004	0	-0.0001	-0.0003	-0.0003	-0.0004	-0.0004
	0	+0.0101	0	+0.0003	+0.0004	+0.0005	+0.0006	+0.0006	0	+0.0013	+0.0022	+0.0027	+0.0029	+0.0030
	R_x/R_y	+0.0101	+0.0603	+0.0741	+0.0792	+0.0801	+0.0812							
$a/b = 3/8$	1.0	-0.0003	0	-0.0000	-0.0001	-0.0001	-0.0001	-0.0001	0	0	0	0	0	0
	0.8	+0.0003	0	-0.0001	-0.0001	-0.0001	-0.0002	-0.0002	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	+0.0007	0	-0.0001	-0.0002	-0.0002	-0.0002	-0.0003	0	+0.0000	-0.0000	-0.0000	-0.0000	-0.0000
	0.4	+0.0023	0	-0.0002	-0.0003	-0.0003	-0.0004	-0.0004	0	-0.0000	-0.0001	-0.0001	-0.0002	-0.0002
	0.2	+0.0149	0	-0.0004	-0.0005	-0.0005	-0.0004	-0.0004	0	-0.0002	-0.0004	-0.0006	-0.0007	-0.0007
	0	+0.0108	0	+0.0003	+0.0005	+0.0006	+0.0006	+0.0006	0	+0.0014	+0.0023	+0.0028	+0.0031	+0.0032
	R_x/R_y	+0.0108	+0.0669	+0.0770	+0.0808	+0.0823	+0.0826							
$a/b = 1/2$	1.0	+0.0000	0	-0.0001	-0.0001	-0.0002	-0.0002	-0.0002	0	0	0	0	0	0
	0.8	+0.0005	0	-0.0001	-0.0002	-0.0002	-0.0002	-0.0002	0	+0.0000	+0.0000	-0.0000	-0.0000	-0.0000
	0.6	+0.0010	0	-0.0001	-0.0002	-0.0003	-0.0003	-0.0003	0	-0.0000	-0.0000	-0.0001	-0.0001	-0.0001
	0.4	+0.0024	0	-0.0002	-0.0003	-0.0003	-0.0003	-0.0003	0	-0.0001	-0.0002	-0.0002	-0.0003	-0.0003
	0.2	+0.0148	0	-0.0004	-0.0004	-0.0004	-0.0003	-0.0003	0	-0.0003	-0.0005	-0.0006	-0.0007	-0.0007
	0	+0.0140	0	+0.0004	+0.0006	+0.0007	+0.0007	+0.0007	0	+0.0018	+0.0028	+0.0033	+0.0035	+0.0036
	R_x/R_y	+0.0140	+0.0710	+0.0798	+0.0824	+0.0832	+0.0833							
$a/b = 3/4$	1.0	+0.0012	0	-0.0001	-0.0002	-0.0003	-0.0003	-0.0003	0	0	0	0	0	0
	0.8	+0.0006	0	-0.0001	-0.0002	-0.0002	-0.0003	-0.0003	0	-0.0000	-0.0000	-0.0000	-0.0001	-0.0001
	0.6	+0.0010	0	-0.0001	-0.0002	-0.0003	-0.0003	-0.0003	0	-0.0000	-0.0001	-0.0001	-0.0002	-0.0002
	0.4	+0.0022	0	-0.0002	-0.0003	-0.0003	-0.0002	-0.0002	0	-0.0001	-0.0002	-0.0003	-0.0003	-0.0003
	0.2	+0.0153	0	-0.0004	-0.0003	-0.0002	-0.0002	-0.0002	0	-0.0004	-0.0005	-0.0005	-0.0005	-0.0005
	0	+0.0202	0	+0.0005	+0.0007	+0.0008	+0.0008	+0.0008	0	+0.0024	+0.0034	+0.0038	+0.0040	+0.0040
	R_x/R_y	+0.0202	+0.0760	+0.0822	+0.0833	+0.0836	+0.0836							
$a/b = 1$	1.0	+0.0021	0	-0.0001	-0.0002	-0.0002	-0.0003	-0.0003	0	0	0	0	0	0
	0.8	+0.0005	0	-0.0001	-0.0002	-0.0002	-0.0002	-0.0002	0	-0.0000	-0.0000	-0.0001	-0.0001	-0.0001
	0.6	+0.0009	0	-0.0002	-0.0002	-0.0002	-0.0002	-0.0002	0	-0.0000	-0.0001	-0.0001	-0.0002	-0.0002
	0.4	+0.0018	0	-0.0002	-0.0002	-0.0002	-0.0002	-0.0002	0	-0.0001	-0.0002	-0.0003	-0.0003	-0.0003
	0.2	+0.0166	0	-0.0004	-0.0002	-0.0002	-0.0001	-0.0001	0	-0.0004	-0.0005	-0.0004	-0.0004	-0.0004
	0	+0.0252	0	+0.0006	+0.0008	+0.0008	+0.0008	+0.0009	0	+0.0028	+0.0038	+0.0041	+0.0042	+0.0043
	R_x/R_y	+0.0252	+0.0786	+0.0830	+0.0835	+0.0836	+0.0836							
$a/b = 3/2$	1.0	+0.0028	0	-0.0001	-0.0002	-0.0002	-0.0002	-0.0001	0	0	0	0	0	0
	0.8	+0.0004	0	-0.0002	-0.0002	-0.0002	-0.0001	-0.0001	0	-0.0000	-0.0000	-0.0001	-0.0001	-0.0001
	0.6	+0.0007	0	-0.0002	-0.0002	-0.0001	-0.0001	-0.0001	0	-0.0001	-0.0001	-0.0001	-0.0001	-0.0001
	0.4	+0.0014	0	-0.0002	-0.0002	-0.0001	-0.0001	-0.0001	0	-0.0002	-0.0002	-0.0002	-0.0002	-0.0001
	0.2	+0.0204	0	-0.0003	-0.0001	-0.0001	-0.0000	-0.0000	0	-0.0004	-0.0004	-0.0002	-0.0002	-0.0002
	0	+0.0327	0	+0.0007	+0.0008	+0.0009	+0.0009	+0.0009	0	+0.0034	+0.0041	+0.0044	+0.0045	+0.0045
	R_x/R_y	+0.0327	+0.0810	+0.0834	+0.0835	+0.0835	+0.0835							

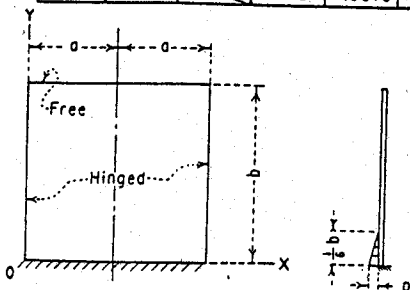


Moment = (Coefficient)(pb^2)
Reaction = (Coefficient)(pb)



POSITIVE SIGN CONVENTION

FIGURE 24 - Plate fixed along one edge--Hinged along two opposite edges, moment and reaction coefficients, Load VII, $1/6$ uniformly varying load.

	y/b	x/a	M_x						M_y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	+5.9610	0	+0.1162	+0.0571	+0.0179	-0.0045	-0.0118	0	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000
	0.8	-2.8341	0	+0.0339	+0.0564	+0.0706	+0.0784	+0.0808	0	+0.0243	+0.0442	+0.0589	+0.0679	+0.0709
	0.6	-1.464	0	+0.0066	+0.0124	+0.0168	+0.0196	+0.0205	0	-0.0004	-0.0008	-0.0010	-0.0012	-0.0014
	0.4	-0.0022	0	+0.0012	+0.0022	+0.0031	+0.0036	+0.0038	0	-0.0004	-0.0008	-0.0011	-0.0013	-0.0014
	0.2	+0.0016	0	+0.0002	+0.0003	+0.0004	+0.0005	+0.0005	0	-0.0001	-0.0003	-0.0003	-0.0004	-0.0004
	0	+0.0030	0	-0.0000	-0.0000	-0.0000	-0.0000	-0.0001	0	-0.0001	-0.0002	-0.0002	-0.0002	-0.0003
	R_x	R_y	+0.0030	-0.0011	-0.0020	-0.0028	-0.0033	-0.0035						
$a/b = 1/4$	1.0	+10.3797	0	+0.0311	-0.0653	-0.1188	-0.1457	-0.1538	0	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000
	0.8	-4.3042	0	+0.0467	+0.0631	+0.0665	+0.0657	+0.0651	0	+0.0917	+0.1644	+0.2161	+0.2470	+0.2572
	0.6	-7.7213	0	+0.0212	+0.0382	+0.0501	+0.0570	+0.0592	0	+0.0132	+0.0255	+0.0357	+0.0423	+0.0446
	0.4	-1.390	0	+0.0090	+0.0169	+0.0230	+0.0268	+0.0281	0	+0.0006	+0.0012	+0.0018	+0.0022	+0.0023
	0.2	+0.0220	0	+0.0024	+0.0046	+0.0063	+0.0074	+0.0078	0	-0.0014	-0.0026	-0.0036	-0.0042	-0.0044
	0	+0.0956	0	-0.0010	-0.0020	-0.0027	-0.0032	-0.0033	0	-0.0051	-0.0098	-0.0134	-0.0158	-0.0166
	R_x	R_y	+0.0956	-0.0413	-0.0800	-0.1101	-0.1302	-0.1354						
$a/b = 3/8$	1.0	+13.4266	0	-0.0276	-0.1306	-0.1774	-0.1976	-0.2033	0	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000
	0.8	-4.9000	0	+0.0421	+0.0370	+0.0214	+0.0090	+0.0044	0	+0.1615	+0.2810	+0.3607	+0.4058	+0.4204
	0.6	-1.1940	0	+0.0251	+0.0409	+0.0487	+0.0519	+0.0526	0	+0.0437	+0.0839	+0.1159	+0.1363	+0.1433
	0.4	-0.3728	0	+0.0134	+0.0245	+0.0323	+0.0368	+0.0383	0	+0.0114	+0.0221	+0.0309	+0.0368	+0.0388
	0.2	+0.0278	0	+0.0038	+0.0071	+0.0095	+0.0110	+0.0115	0	-0.0012	-0.0022	-0.0029	-0.0032	-0.0033
	0	+0.1943	0	-0.0031	-0.0039	-0.0081	-0.0095	-0.0100	0	-0.0155	-0.0294	-0.0404	-0.0474	-0.0499
	R_x	R_y	+0.1943	-0.1076	-0.2039	-0.2792	-0.3269	-0.3431						
$a/b = 1/2$	1.0	+15.7047	0	-0.0725	-0.1724	-0.2109	-0.2259	-0.2298	0	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000
	0.8	-5.1848	0	+0.0310	+0.0035	-0.0273	-0.0473	-0.0541	0	+0.2237	+0.3761	+0.4702	+0.5207	+0.5365
	0.6	-1.4580	0	+0.0221	+0.0284	+0.0257	+0.0211	+0.0192	0	+0.0786	+0.1492	+0.2033	+0.2367	+0.2479
	0.4	-0.5749	0	+0.0129	+0.0215	+0.0257	+0.0271	+0.0274	0	+0.0294	+0.0567	+0.0790	+0.0935	+0.0985
	0.2	-0.0597	0	+0.0039	+0.0069	+0.0086	+0.0094	+0.0096	0	+0.0049	+0.0096	+0.0138	+0.0166	+0.0176
	0	+0.1393	0	-0.0036	-0.0067	-0.0090	-0.0105	-0.0110	0	-0.0178	-0.0334	-0.0452	-0.0525	-0.0550
	R_x	R_y	+0.1393	-0.1392	-0.2596	-0.3486	-0.4023	-0.4200						
$a/b = 3/4$	1.0	+19.0782	0	-0.1285	-0.2101	-0.2343	-0.2428	-0.2451	0	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000
	0.8	-5.5535	0	+0.0089	-0.0465	-0.0882	-0.1110	-0.1181	0	+0.3275	+0.5143	+0.6138	+0.6621	+0.6765
	0.6	-1.7231	0	+0.0175	+0.0054	-0.0141	-0.0286	-0.0337	0	+0.1481	+0.2712	+0.3569	+0.4059	+0.4217
	0.4	-0.9245	0	+0.0142	+0.0173	+0.0136	+0.0090	+0.0071	0	+0.0775	+0.1480	+0.2027	+0.2368	+0.2483
	0.2	-0.4547	0	+0.0090	+0.0147	+0.0173	+0.0182	+0.0184	0	+0.0410	+0.0794	+0.1109	+0.1315	+0.1386
	0	-0.1466	0	+0.0030	+0.0065	+0.0101	+0.0128	+0.0138	0	+0.0150	+0.0323	+0.0503	+0.0640	+0.0691
	R_x	R_y	-0.1466	-0.1354	-0.2227	-0.2576	-0.2627	-0.2615						
$a/b = 1$	1.0	+21.4049	0	-0.1478	-0.2002	-0.2064	-0.2054	-0.2046	0	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000
	0.8	-5.9317	0	-0.0013	-0.0588	-0.0909	-0.1048	-0.1086	0	+0.4123	+0.6117	+0.7060	+0.7488	+0.7612
	0.6	-1.8811	0	+0.0218	+0.0041	-0.0159	-0.0279	-0.0317	0	+0.2170	+0.3816	+0.4856	+0.5414	+0.5588
	0.4	-1.2060	0	+0.0232	+0.0275	+0.0241	+0.0207	+0.0195	0	+0.1354	+0.2537	+0.3405	+0.3922	+0.4093
	0.2	-0.8257	0	+0.0195	+0.0326	+0.0407	+0.0455	+0.0471	0	+0.0951	+0.1832	+0.2540	+0.2994	+0.3150
	0	-0.3387	0	+0.0138	+0.0285	+0.0420	+0.0516	+0.0550	0	+0.0690	+0.1423	+0.2101	+0.2580	+0.2751
	R_x	R_y	-0.3387	-0.1330	-0.1655	-0.1250	-0.0735	-0.0517						
$a/b = 3/2$	1.0	+24.0577	0	-0.1416	-0.1333	-0.0989	-0.0729	-0.0635	0	+1.0000	+1.0000	+1.0000	+1.0000	+1.0000
	0.8	-6.7445	0	-0.0047	-0.0329	-0.0268	-0.0139	-0.0083	0	+0.5409	+0.7404	+0.8224	+0.8580	+0.8683
	0.6	-1.9745	0	+0.0346	+0.0275	+0.0305	+0.0386	+0.0425	0	+0.3416	+0.5577	+0.6771	+0.7370	+0.7553
	0.4	-1.4705	0	+0.0429	+0.0577	+0.0694	+0.0795	+0.0835	0	+0.2475	+0.4436	+0.5744	+0.6479	+0.6716
	0.2	-1.1741	0	+0.0402	+0.0691	+0.0915	+0.1065	+0.1118	0	+0.1999	+0.3789	+0.5147	+0.5976	+0.6253
	0	-0.4225	0	+0.0337	+0.0692	+0.0992	+0.1183	+0.1248	0	+0.1683	+0.3461	+0.4960	+0.5917	+0.6242
	R_x	R_y	-0.4225	-0.1575	-0.1016	+0.0130	+0.0925	+0.1189						



Moment = (Coefficient)(M)
Reaction = (Coefficient)($\frac{M}{b}$)






FIGURE 25 - Plate fixed along one edge--Hinged along two opposite edges, moment and reaction coefficients, Load VIII, moment at free edge.

	y/b	R_x	x/a	M_x						M_y					
				0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	+1.2357	0	-.0203	-.0352	-.0455	-.0514	-.0534	0	0	0	0	0	0	0
	0.8	+.0124	0	-.0033	-.0062	-.0084	-.0099	-.0103	0	+.0011	+.0021	+.0029	+.0034	+.0035	0
	0.6	-.0039	0	-.0005	-.0010	-.0014	-.0017	-.0017	0	+.0003	+.0005	+.0007	+.0008	+.0009	0
	0.4	-.0012	0	-.0001	-.0002	-.0002	-.0003	-.0003	0	+.0001	+.0001	+.0001	+.0002	+.0002	0
	0.2	-.0002	0	-.0000	-.0000	-.0000	-.0000	-.0000	0	+.0000	+.0000	+.0000	+.0000	+.0000	0
	0	-.0002	0	+.0000	+.0000	+.0000	+.0000	+.0000	0	+.0000	+.0000	+.0000	+.0000	+.0000	0
	R_x	R_y	-.0002	+.0001	+.0001	+.0001	+.0002	+.0002	+.0002						
$a/b = 1/4$	1.0	+2.3808	0	-.0534	-.0894	-.1127	-.1257	-.1300	0	0	0	0	0	0	0
	0.8	+.0825	0	-.0186	-.0346	-.0465	-.0538	-.0563	0	+.0050	+.0091	+.0122	+.0140	+.0146	0
	0.6	-.0040	0	-.0069	-.0130	-.0178	-.0208	-.0219	0	+.0029	+.0054	+.0074	+.0086	+.0091	0
	0.4	-.0117	0	-.0024	-.0045	-.0062	-.0073	-.0077	0	+.0013	+.0025	+.0034	+.0040	+.0042	0
	0.2	-.0149	0	-.0006	-.0011	-.0015	-.0017	-.0018	0	+.0007	+.0013	+.0018	+.0021	+.0022	0
	0	-.0250	0	+.0002	+.0005	+.0006	+.0008	+.0008	0	+.0012	+.0023	+.0032	+.0038	+.0040	0
	R_x	R_y	-.0250	+.0089	+.0168	+.0228	+.0273	+.0284							
$a/b = 3/8$	1.0	+3.4577	0	-.0873	-.1422	-.1761	-.1947	-.2007	0	0	0	0	0	0	0
	0.8	+.1637	0	-.0401	-.0730	-.0966	-.1107	-.1154	0	+.0087	+.0153	+.0198	+.0223	+.0231	0
	0.6	+.0175	0	-.0192	-.0361	-.0491	-.0572	-.0599	0	+.0069	+.0129	+.0174	+.0202	+.0212	0
	0.4	-.0344	0	-.0082	-.0156	-.0214	-.0251	-.0263	0	+.0048	+.0092	+.0126	+.0147	+.0155	0
	0.2	-.0967	0	-.0018	-.0034	-.0046	-.0054	-.0057	0	+.0047	+.0090	+.0124	+.0145	+.0153	0
	0	-.1369	0	+.0019	+.0037	+.0051	+.0060	+.0063	0	+.0097	+.0185	+.0254	+.0299	+.0314	0
	R_x	R_y	-.1369	+.0494	+.0941	+.1295	+.1520	+.1595							
$a/b = 1/2$	1.0	+4.5104	0	-.1183	-.1878	-.2294	-.2519	-.2590	0	0	0	0	0	0	0
	0.8	+.2138	0	-.0614	-.1094	-.1423	-.1612	-.1674	0	+.0117	+.0199	+.0248	+.0274	+.0281	0
	0.6	+.0222	0	-.0322	-.0596	-.0800	-.0924	-.0965	0	+.0115	+.0212	+.0282	+.0323	+.0337	0
	0.4	-.0945	0	-.0141	-.0265	-.0360	-.0419	-.0439	0	+.0113	+.0213	+.0291	+.0339	+.0356	0
	0.2	-.2623	0	-.0018	-.0033	-.0045	-.0052	-.0054	0	+.0152	+.0288	+.0396	+.0464	+.0488	0
	0	-.2967	0	+.0059	+.0112	+.0154	+.0181	+.0190	0	+.0294	+.0560	+.0769	+.0904	+.0950	0
	R_x	R_y	-.2967	+.1156	+.2193	+.3010	+.3530	+.3709							
$a/b = 3/4$	1.0	+6.4157	0	-.1805	-.2406	-.2834	-.3048	-.3114	0	0	0	0	0	0	0
	0.8	+.1940	0	-.0910	-.1525	-.1893	-.2084	-.2143	0	+.0190	+.0302	+.0362	+.0391	+.0400	0
	0.6	-.0730	0	-.0483	-.0853	-.1093	-.1223	-.1264	0	+.0259	+.0464	+.0605	+.0687	+.0713	0
	0.4	-.3103	0	-.0185	-.0332	-.0429	-.0481	-.0497	0	+.0353	+.0661	+.0894	+.1039	+.1087	0
	0.2	-.6568	0	+.0034	+.0070	+.0104	+.0128	+.0136	0	+.0538	+.1019	+.1394	+.1631	+.1712	0
	0	-.5452	0	+.0181	+.0342	+.0468	+.0548	+.0575	0	+.0905	+.1712	+.2342	+.2740	+.2876	0
	R_x	R_y	-.5452	+.2510	+.4706	+.6371	+.7396	+.7741							
$a/b = 1$	1.0	+7.7716	0	-.1798	-.2494	-.2779	-.2885	-.2911	0	0	0	0	0	0	0
	0.8	+.1043	0	-.1042	-.1602	-.1855	-.1952	-.1976	0	+.0292	+.0459	+.0556	+.0609	+.0626	0
	0.6	-.2131	0	-.0532	-.0859	-.1012	-.1068	-.1081	0	+.0468	+.0830	+.1080	+.1227	+.1276	0
	0.4	-.5179	0	-.0161	-.0249	-.0271	-.0264	-.0258	0	+.0686	+.1272	+.1711	+.1981	+.2072	0
	0.2	-.9412	0	+.0120	+.0240	+.0348	+.0421	+.0447	0	+.1020	+.1917	+.2604	+.3032	+.3178	0
	0	-.6348	0	+.0314	+.0588	+.0796	+.0923	+.0966	0	+.1569	+.2940	+.3978	+.4617	+.4831	0
	R_x	R_y	-.6348	+.3528	+.6445	+.8488	+.9658	+.10036							
$a/b = 3/2$	1.0	+9.0313	0	-.1917	-.2216	-.2099	-.1933	-.1866	0	0	0	0	0	0	0
	0.8	-.0267	0	-.1133	-.1390	-.1302	-.1165	-.1108	0	+.0501	+.0796	+.0992	+.1112	+.1152	0
	0.6	-.3777	0	-.0541	-.0645	-.0536	-.0409	-.0358	0	+.0896	+.1563	+.2027	+.2305	+.2398	0
	0.4	-.7215	0	-.0081	+.0009	+.0172	+.0304	+.0353	0	+.1331	+.2416	+.3194	+.3658	+.3811	0
	0.2	-.1699	0	+.0281	+.0562	+.0792	+.0937	+.0987	0	+.1898	+.3476	+.4604	+.5265	+.5482	0
	0	-.5965	0	+.0543	+.0981	+.1280	+.1449	+.1503	0	+.2714	+.4904	+.6400	+.7243	+.7513	0
	R_x	R_y	-.5965	+.5000	+.8389	+.10190	+.10977	+.11190							

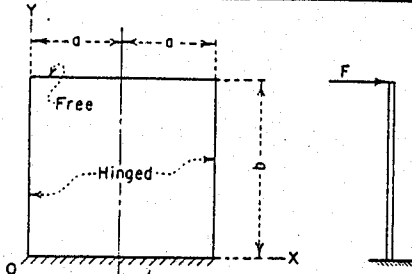


Moment = (Coefficient)(Fb)
Reaction = (Coefficient)(F)




POSITIVE SIGN CONVENTION

FIGURE 26 - Plate fixed along one edge--Hinged along two opposite edges, moment and reaction coefficients, Load IX, line load at free edge.

	y/b	x/a	M_x							M_y						
			0	0.2	0.4	0.6	0.8	1.0		0	0.2	0.4	0.6	0.8	1.0	
$a/b = 1/8$	1.0	R_x	+ .1216	+ .0077	+ .0049	+ .0028	+ .0012	+ .0003	0	0	0	0	0	0	0	
	0.8		+ .1267	+ .0079	+ .0050	+ .0028	+ .0013	+ .0003	0	+ .0016	+ .0010	+ .0006	+ .0003	+ .0001	+ .0000	
	0.6		+ .1253	+ .0078	+ .0050	+ .0028	+ .0012	+ .0003	0	+ .0016	+ .0010	+ .0006	+ .0002	+ .0001	+ .0000	
	0.4		+ .1256	+ .0077	+ .0049	+ .0027	+ .0012	+ .0003	0	+ .0015	+ .0010	+ .0005	+ .0002	+ .0000	+ .0001	
	0.2		+ .1207	+ .0068	+ .0041	+ .0021	+ .0008	+ .0001	0	+ .0014	+ .0008	+ .0003	+ .0001	+ .0003	+ .0004	
	0		+ .0041	0	+ .0001	+ .0005	+ .0009	+ .0013	0	0	+ .0007	+ .0023	+ .0043	+ .0064	+ .0083	
		R_y	+ .0041	- .0062	+ .0503	+ .1060	+ .2029	+ .3120								
$a/b = 1/4$	1.0	R_x	+ .2265	+ .0257	+ .0192	+ .0108	+ .0047	+ .0011	0	0	0	0	0	0	0	
	0.8		+ .2638	+ .0313	+ .0197	+ .0108	+ .0046	+ .0011	0	+ .0063	+ .0039	+ .0020	+ .0007	+ .0001	+ .0005	
	0.6		+ .2539	+ .0301	+ .0188	+ .0101	+ .0042	+ .0008	0	+ .0060	+ .0037	+ .0018	+ .0004	+ .0006	+ .0010	
	0.4		+ .2507	+ .0270	+ .0160	+ .0081	+ .0029	+ .0002	0	+ .0054	+ .0030	+ .0010	+ .0006	+ .0018	+ .0024	
	0.2		+ .1832	+ .0172	+ .0092	+ .0040	+ .0010	+ .0003	0	+ .0034	+ .0015	+ .0002	+ .0015	+ .0024	+ .0030	
	0		- .0866	0	+ .0006	+ .0017	+ .0032	+ .0047	0	0	+ .0028	+ .0086	+ .0158	+ .0236	+ .0304	
		R_y	- .0866	- .0058	+ .0998	+ .2009	+ .3764	+ .5716								
$a/b = 3/8$	1.0	R_x	+ .3267	+ .0642	+ .0407	+ .0218	+ .0085	+ .0012	0	0	0	0	0	0	0	
	0.8		+ .4129	+ .0664	+ .0399	+ .0206	+ .0078	+ .0010	0	+ .0133	+ .0076	+ .0031	+ .0002	+ .0025	+ .0037	
	0.6		+ .3798	+ .0604	+ .0356	+ .0176	+ .0060	+ .0002	0	+ .0121	+ .0067	+ .0020	+ .0018	+ .0045	+ .0060	
	0.4		+ .3439	+ .0479	+ .0265	+ .0120	+ .0032	+ .0007	0	+ .0096	+ .0045	+ .0000	+ .0036	+ .0062	+ .0078	
	0.2		+ .1762	+ .0232	+ .0119	+ .0051	+ .0016	+ .0001	0	+ .0046	+ .0020	+ .0003	+ .0007	+ .0011	+ .0012	
	0		- .0155	0	+ .0011	+ .0034	+ .0061	+ .0092	0	0	+ .0055	+ .0168	+ .0307	+ .0458	+ .0589	
		R_y	- .0155	- .0080	+ .1135	+ .2213	+ .4296	+ .6709								
$a/b = 1/2$	1.0	R_x	+ .4597	+ .1074	+ .0638	+ .0304	+ .0085	+ .0017	0	0	0	0	0	0	0	
	0.8		+ .5570	+ .1052	+ .0592	+ .0275	+ .0079	+ .0010	0	+ .0210	+ .0108	+ .0028	+ .0032	+ .0076	+ .0105	
	0.6		+ .4774	+ .0899	+ .0495	+ .0219	+ .0053	+ .0018	0	+ .0180	+ .0087	+ .0004	+ .0063	+ .0113	+ .0145	
	0.4		+ .3898	+ .0645	+ .0334	+ .0137	+ .0027	+ .0016	0	+ .0129	+ .0051	+ .0014	+ .0065	+ .0100	+ .0122	
	0.2		+ .1422	+ .0261	+ .0134	+ .0062	+ .0031	+ .0019	0	+ .0052	+ .0033	+ .0035	+ .0051	+ .0071	+ .0088	
	0		- .0401	0	+ .0019	+ .0059	+ .0108	+ .0163	0	0	+ .0096	+ .0296	+ .0541	+ .0813	+ .1051	
		R_y	- .0401	+ .0011	+ .1576	+ .3024	+ .5696	+ .8739								
$a/b = 3/4$	1.0	R_x	+ .8290	+ .1977	+ .0952	+ .0298	+ .0059	+ .0162	0	0	0	0	0	0	0	
	0.8		+ .7827	+ .1726	+ .0817	+ .0261	+ .0032	+ .0110	0	+ .0345	+ .0144	+ .0001	+ .0106	+ .0186	+ .0257	
	0.6		+ .5677	+ .1318	+ .0621	+ .0194	+ .0023	+ .0079	0	+ .0264	+ .0102	+ .0034	+ .0139	+ .0218	+ .0279	
	0.4		+ .3914	+ .0826	+ .0377	+ .0120	+ .0001	+ .0026	0	+ .0165	+ .0061	+ .0005	+ .0042	+ .0063	+ .0077	
	0.2		+ .0741	+ .0282	+ .0144	+ .0077	+ .0072	+ .0081	0	+ .0056	+ .0084	+ .0176	+ .0296	+ .0411	+ .0501	
	0		- .0698	0	+ .0041	+ .0125	+ .0221	+ .0326	0	0	+ .0206	+ .0623	+ .1104	+ .1630	+ .2076	
		R_y	- .0698	+ .0333	+ .2595	+ .4574	+ .7928	+ 1.1288								
$a/b = 1$	1.0	R_x	+ 1.1828	+ .2949	+ .1046	+ .0146	+ .0268	+ .0324	0	0	0	0	0	0	0	
	0.8		+ .9335	+ .2421	+ .0873	+ .0129	+ .0199	+ .0227	0	+ .0484	+ .0159	+ .0023	+ .0141	+ .0227	+ .0324	
	0.6		+ .5948	+ .1724	+ .0643	+ .0097	+ .0132	+ .0141	0	+ .0345	+ .0119	+ .0032	+ .0132	+ .0199	+ .0268	
	0.4		+ .3699	+ .1033	+ .0384	+ .0069	+ .0032	+ .0023	0	+ .0207	+ .0090	+ .0069	+ .0097	+ .0129	+ .0146	
	0.2		+ .0548	+ .0362	+ .0152	+ .0090	+ .0119	+ .0159	0	+ .0072	+ .0152	+ .0384	+ .0643	+ .0873	+ .1046	
	0		- .0887	0	+ .0072	+ .0207	+ .0345	+ .0484	0	0	+ .0362	+ .1033	+ .1724	+ .2421	+ .2949	
		R_y	- .0887	+ .0548	+ .3699	+ .5348	+ .9335	+ 1.1828								




Moment = (Coefficient) (pb²)
Reaction = (Coefficient) (pb)




POSITIVE SIGN CONVENTION

FIGURE 27 - Plate fixed along two adjacent edges, moment and reaction coefficients, Load I, uniform load.

	y/b	R_x	R_y	M_x						M_y					
				0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	-.0014	+.0002	+.0002	+.0002	+.0002	+.0001	+.0001	0	0	0	0	0	0	0
	0.8	+.0075	+.0011	+.0008	+.0006	+.0004	+.0002	0	0	+.0002	+.0002	+.0002	+.0002	+.0003	+.0003
	0.6	+.0970	+.0056	+.0035	+.0019	+.0008	+.0001	0	0	+.0011	+.0007	+.0003	+.0000	-.0001	-.0002
	0.4	+.1258	+.0074	+.0046	+.0025	+.0010	+.0002	0	0	+.0015	+.0009	+.0004	+.0001	-.0002	-.0003
	0.2	+.1209	+.0067	+.0040	+.0021	+.0008	+.0001	0	0	+.0014	+.0008	+.0003	+.0001	-.0003	-.0005
	0	+.0046	0	+.0001	+.0005	+.0009	+.0013	0	0	0	+.0007	+.0023	+.0043	+.0064	+.0083
	R_x	R_y	+.0046	-.0061	+.0505	+.1061	+.2029	+.3114							
$a/b = 1/4$	1.0	-.0187	+.0028	+.0031	+.0028	+.0020	+.0011	0	0	0	0	0	0	0	0
	0.8	+.0315	+.0079	+.0060	+.0041	+.0023	+.0009	0	0	+.0016	+.0014	+.0014	+.0014	+.0016	+.0018
	0.6	+.1899	+.0195	+.0114	+.0056	+.0019	+.0000	0	0	+.0039	+.0021	+.0005	-.0008	-.0017	-.0022
	0.4	+.2492	+.0238	+.0133	+.0060	+.0015	-.0005	0	0	+.0048	+.0023	+.0001	-.0017	-.0031	-.0040
	0.2	+.1869	+.0165	+.0085	+.0033	+.0005	-.0006	0	0	+.0033	+.0013	-.0005	-.0019	-.0030	-.0037
	0	-.0822	0	+.0006	+.0017	+.0031	+.0045	0	0	0	+.0028	+.0085	+.0153	+.0226	+.0299
	R_x	R_y	-.0822	-.0012	+.1050	+.2030	+.3681	+.5432							
$a/b = 3/8$	1.0	-.0462	+.0102	+.0106	+.0085	+.0055	+.0026	0	0	0	0	0	0	0	0
	0.8	+.0819	+.0213	+.0149	+.0091	+.0046	+.0015	0	0	+.0043	+.0033	+.0025	+.0019	+.0016	+.0017
	0.6	+.2733	+.0361	+.0193	+.0083	+.0017	-.0010	0	0	+.0072	+.0030	-.0008	-.0039	-.0061	-.0075
	0.4	+.3352	+.0384	+.0185	+.0063	-.0003	-.0022	0	0	+.0077	+.0024	-.0025	-.0066	-.0096	-.0118
	0.2	+.1928	+.0212	+.0094	+.0027	-.0003	-.0010	0	0	+.0042	+.0012	-.0013	-.0050	-.0042	-.0049
	0	-.0069	0	+.0011	+.0031	+.0055	+.0079	0	0	0	+.0055	+.0157	+.0274	+.0395	+.0495
	R_x	R_y	-.0069	+.0125	+.1333	+.2285	+.3963	+.5629							
$a/b = 1/2$	1.0	-.0487	+.0223	+.0201	+.0137	+.0074	+.0028	0	0	0	0	0	0	0	0
	0.8	+.1390	+.0364	+.0233	+.0126	+.0051	+.0010	0	0	+.0073	+.0047	+.0025	+.0006	-.0009	-.0016
	0.6	+.3336	+.0502	+.0244	+.0086	+.0001	-.0026	0	0	+.0100	+.0029	-.0036	-.0089	-.0127	-.0154
	0.4	+.3772	-.0476	+.0198	+.0046	-.0025	-.0038	0	0	+.0095	+.0013	-.0061	-.0119	-.0161	-.0190
	0.2	+.1794	+.0229	+.0087	+.0018	-.0005	-.0005	0	0	+.0046	+.0011	-.0008	-.0015	-.0015	-.0014
	0	-.0250	0	+.0019	+.0053	+.0089	+.0125	0	0	0	+.0096	+.0263	+.0443	+.0625	+.0775
	R_x	R_y	-.0250	+.0438	+.1939	+.3071	+.4893	+.6544							
$a/b = 3/4$	1.0	+.0358	+.0524	+.0341	+.0153	+.0028	-.0022	0	0	0	0	0	0	0	0
	0.8	+.2257	+.0612	+.0319	+.0118	+.0005	-.0029	0	0	+.0122	+.0059	+.0004	-.0042	-.0078	-.0106
	0.6	+.3844	-.0661	+.0257	+.0046	-.0047	-.0059	0	0	+.0132	+.0006	-.0102	-.0182	-.0238	-.0279
	0.4	+.3913	+.0541	+.0165	-.0002	-.0057	-.0052	0	0	+.0108	-.0019	-.0117	-.0180	-.0217	-.0244
	0.2	+.1509	+.0229	+.0063	+.0006	+.0006	+.0021	0	0	+.0046	+.0018	+.0034	+.0075	+.0119	+.0154
	0	-.0437	0	+.0040	+.0099	+.0155	+.0209	0	0	0	+.0200	+.0494	+.0773	+.1045	+.1262
	R_x	R_y	-.0437	+.1178	+.3044	+.4261	+.6038	+.7410							
$a/b = 1$	1.0	+.1522	+.0776	+.0375	+.0086	-.0061	-.0088	0	0	0	0	0	0	0	0
	0.8	+.2785	+.0772	+.0318	+.0051	-.0067	-.0076	0	0	+.0154	+.0058	-.0018	-.0075	-.0117	-.0156
	0.6	+.3929	+.0725	+.0216	-.0016	-.0096	-.0085	0	0	+.0145	-.0022	-.0145	-.0224	-.0274	-.0316
	0.4	+.3794	+.0542	+.0113	-.0042	-.0074	-.0051	0	0	+.0108	-.0046	-.0136	-.0172	-.0182	-.0193
	0.2	+.1311	+.0216	+.0042	+.0007	+.0027	+.0054	0	0	+.0043	+.0036	+.0104	+.0201	+.0292	+.0360
	0	-.0499	0	+.0065	+.0145	+.0213	+.0275	0	0	0	+.0323	+.0725	+.1064	+.1375	+.1605
	R_x	R_y	-.0499	+.1916	+.3934	+.5067	+.6597	+.7476							




Moment = (Coefficient) (pb^2)
Reaction = (Coefficient) (pb)




POSITIVE SIGN CONVENTION

FIGURE 28 - Plate fixed along two adjacent edges, moment and reaction coefficients, Load II, $2/3$ uniform load.

	y/b	x/a	M_x						M_y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	-0.0001	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	0	0	0	0	0	0	0
	0.8	-0.0002	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	-0.0001	+0.0002	+0.0002	+0.0002	+0.0001	+0.0001	0	+0.0000	+0.0001	+0.0001	+0.0001	+0.0001	+0.0001
	0.4	+0.0288	+0.0221	+0.0144	+0.0008	+0.0004	+0.0001	0	+0.0004	+0.0003	+0.0002	+0.0001	+0.0001	+0.0001
	0.2	+0.1089	+0.0057	+0.0032	+0.0014	+0.0004	-0.0001	0	+0.0011	+0.0006	+0.0001	-0.0004	-0.0007	-0.0009
	0	+0.0441	0	+0.0001	+0.0003	+0.0006	+0.0009	0	0	+0.0006	+0.0017	+0.0030	+0.0045	+0.0057
		R_x	R_y	+0.0441	+0.0021	+0.0412	+0.0763	+0.1395	+0.2216					
$a/b = 1/4$	1.0	-0.0034	+0.0002	+0.0003	+0.0003	+0.0003	+0.0002	0	0	0	0	0	0	0
	0.8	-0.0003	+0.0007	+0.0007	+0.0006	+0.0004	+0.0002	0	+0.0001	+0.0002	+0.0002	+0.0003	+0.0004	+0.0004
	0.6	+0.0049	+0.0023	+0.0019	+0.0013	+0.0008	+0.0003	0	+0.0005	+0.0005	+0.0005	+0.0006	+0.0006	+0.0007
	0.4	+0.0655	+0.0071	+0.0041	+0.0019	+0.0005	-0.0001	0	+0.0014	+0.0008	+0.0002	-0.0002	-0.0006	-0.0009
	0.2	+0.1620	+0.0113	+0.0046	+0.0009	-0.0008	-0.0011	0	+0.0023	+0.0003	-0.0015	-0.0030	-0.0041	-0.0050
	0	+0.0298	0	+0.0004	+0.0012	+0.0019	+0.0027	0	0	+0.0021	+0.0058	+0.0096	+0.0135	+0.0165
		R_x	R_y	+0.0298	+0.0247	+0.0989	+0.1533	+0.2384	+0.3108					
$a/b = 3/8$	1.0	-0.0120	+0.0010	+0.0014	+0.0013	+0.0010	+0.0006	0	0	0	0	0	0	0
	0.8	+0.0047	+0.0028	+0.0023	+0.0017	+0.0010	+0.0005	0	+0.0006	+0.0005	+0.0006	+0.0006	+0.0007	+0.0009
	0.6	+0.0178	+0.0055	+0.0038	+0.0022	+0.0010	+0.0002	0	+0.0011	+0.0010	+0.0008	+0.0007	+0.0006	+0.0005
	0.4	+0.0923	+0.0112	+0.0054	+0.0016	-0.0003	-0.0008	0	+0.0022	+0.0008	-0.0006	-0.0018	-0.0028	-0.0035
	0.2	+0.1803	+0.0134	+0.0037	-0.0008	-0.0020	-0.0017	0	+0.0027	-0.0006	-0.0034	-0.0054	-0.0067	-0.0076
	0	+0.0163	0	+0.0008	+0.0019	+0.0030	+0.0040	0	0	+0.0039	+0.0096	+0.0151	+0.0201	+0.0238
		R_x	R_y	+0.0163	+0.0571	+0.1501	+0.2052	+0.2857	+0.3354					
$a/b = 1/2$	1.0	-0.0177	+0.0025	+0.0029	+0.0024	+0.0015	+0.0007	0	0	0	0	0	0	0
	0.8	+0.0130	+0.0052	+0.0038	+0.0024	+0.0013	+0.0004	0	+0.0010	+0.0008	+0.0007	+0.0006	+0.0006	+0.0006
	0.6	+0.0299	+0.0084	+0.0050	+0.0023	+0.0006	-0.0001	0	+0.0017	+0.0012	+0.0007	+0.0000	-0.0005	-0.0008
	0.4	+0.1045	+0.0133	+0.0051	+0.0006	-0.0012	-0.0014	0	+0.0027	+0.0004	-0.0018	-0.0037	-0.0050	-0.0060
	0.2	+0.1774	+0.0131	+0.0020	-0.0017	-0.0024	-0.0017	0	+0.0026	-0.0017	-0.0047	-0.0064	-0.0073	-0.0080
	0	+0.0086	0	+0.0013	+0.0029	+0.0042	+0.0054	0	0	+0.0064	+0.0144	+0.0211	+0.0268	+0.0310
		R_x	R_y	+0.0086	+0.0973	+0.1953	+0.2459	+0.3116	+0.3434					
$a/b = 3/4$	1.0	-0.0104	+0.0067	+0.0053	+0.0028	+0.0009	+0.0000	0	0	0	0	0	0	0
	0.8	+0.0269	+0.0091	+0.0054	+0.0023	+0.0005	-0.0002	0	+0.0018	+0.0011	+0.0005	-0.0001	-0.0006	-0.0010
	0.6	+0.0411	+0.0115	+0.0051	+0.0012	-0.0006	-0.0009	0	+0.0023	+0.0011	-0.0003	-0.0017	-0.0028	-0.0035
	0.4	+0.1086	+0.0141	+0.0032	-0.0012	-0.0022	-0.0017	0	+0.0028	-0.0009	-0.0040	-0.0061	-0.0074	-0.0083
	0.2	+0.1701	+0.0113	-0.0003	-0.0025	-0.0020	-0.0011	0	+0.0023	-0.0034	-0.0058	-0.0061	-0.0056	-0.0054
	0	+0.0048	0	+0.0023	+0.0045	+0.0060	+0.0072	0	0	+0.0117	+0.0224	+0.0299	+0.0358	+0.0402
		R_x	R_y	+0.0048	+0.1615	+0.2512	+0.2874	+0.3312	+0.3489					
$a/b = 1$	1.0	+0.0052	+0.0104	+0.0059	+0.0018	-0.0006	-0.0011	0	0	0	0	0	0	0
	0.8	+0.0356	+0.0116	+0.0053	+0.0011	-0.0008	-0.0010	0	+0.0023	+0.0012	+0.0002	-0.0007	-0.0014	-0.0020
	0.6	+0.0430	+0.0126	+0.0041	-0.0002	-0.0016	-0.0013	0	+0.0025	+0.0008	-0.0012	-0.0028	-0.0038	-0.0046
	0.4	+0.1052	+0.0135	+0.0013	-0.0022	-0.0025	-0.0017	0	+0.0027	-0.0021	-0.0053	-0.0069	-0.0075	-0.0080
	0.2	+0.1682	+0.0094	-0.0015	-0.0023	-0.0015	-0.0005	0	+0.0019	-0.0045	-0.0055	-0.0043	-0.0029	-0.0020
	0	+0.0088	0	+0.0033	+0.0057	+0.0072	+0.0083	0	0	+0.0166	+0.0285	+0.0358	+0.0414	+0.0456
		R_x	R_y	+0.0088	+0.2052	+0.2808	+0.3064	+0.3372	+0.3473					

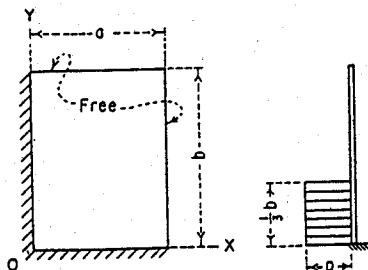



Moment = (Coefficient) (pb^2)
Reaction = (Coefficient) (pb)




POSITIVE SIGN CONVENTION

FIGURE 29 - Plate fixed along two adjacent edges, moment and reaction coefficients, Load III, $1/3$ uniform load.

	y/b	x/a	M_x						M_y					
			0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	+ .0075	+ .0007	+ .0006	+ .0004	+ .0002	+ .0001	0	0	0	0	0	0	0
	0.8	+ .0252	+ .0017	+ .0011	+ .0006	+ .0003	+ .0001	0	+ .0003	+ .0002	+ .0001	+ .0001	+ .0001	+ .0001
	0.6	+ .0501	+ .0031	+ .0020	+ .0011	+ .0005	+ .0001	0	+ .0006	+ .0004	+ .0002	+ .0001	+ .0000	- .0000
	0.4	+ .0755	+ .0046	+ .0029	+ .0016	+ .0007	+ .0001	0	+ .0009	+ .0006	+ .0003	+ .0001	- .0000	- .0001
	0.2	+ .0964	+ .0052	+ .0031	+ .0015	+ .0005	+ .0000	0	+ .0010	+ .0006	+ .0002	- .0001	- .0003	- .0004
	0	+ .0056	0	+ .0001	+ .0004	+ .0008	+ .0011	0	0	+ .0007	+ .0021	+ .0033	+ .0056	+ .0072
	R_x	R_y	+ .0056	- .0008	+ .0510	+ .0996	+ .1819	+ .2706						
$a/b = 1/4$	1.0	+ .0076	+ .0043	+ .0035	+ .0026	+ .0016	+ .0007	0	0	0	0	0	0	0
	0.8	+ .0557	+ .0078	+ .0052	+ .0031	+ .0015	+ .0005	0	+ .0016	+ .0011	+ .0007	+ .0005	+ .0004	+ .0004
	0.6	+ .1026	+ .0119	+ .0074	+ .0039	+ .0015	+ .0003	0	+ .0024	+ .0014	+ .0007	+ .0001	- .0004	- .0006
	0.4	+ .1513	+ .0150	+ .0085	+ .0040	+ .0011	- .0002	0	+ .0030	+ .0015	+ .0002	- .0009	- .0017	- .0022
	0.2	+ .1475	+ .0122	+ .0060	+ .0022	+ .0001	- .0006	0	+ .0024	+ .0008	- .0006	- .0017	- .0026	- .0032
	0	- .0598	0	+ .0005	+ .0014	+ .0024	+ .0035	0	0	+ .0024	+ .0069	+ .0121	+ .0175	+ .0221
	R_x	R_y	- .0598	+ .0133	+ .1020	+ .1780	+ .3009	+ .4232						
$a/b = 3/8$	1.0	+ .0040	+ .0115	+ .0095	+ .0066	+ .0037	+ .0015	0	0	0	0	0	0	0
	0.8	+ .0970	+ .0180	+ .0116	+ .0066	+ .0029	+ .0008	0	+ .0036	+ .0023	+ .0012	+ .0004	- .0000	- .0002
	0.6	+ .1553	+ .0233	+ .0133	+ .0062	+ .0018	- .0002	0	+ .0047	+ .0024	+ .0003	- .0013	- .0026	- .0034
	0.4	+ .2050	+ .0246	+ .0122	+ .0045	+ .0002	- .0012	0	+ .0049	+ .0017	- .0012	- .0037	- .0055	- .0067
	0.2	+ .1517	+ .0152	+ .0063	+ .0016	- .0005	- .0009	0	+ .0030	+ .0006	- .0014	- .0028	- .0037	- .0043
	0	+ .0044	0	+ .0009	+ .0024	+ .0040	+ .0057	0	0	+ .0044	+ .0119	+ .0202	+ .0286	+ .0354
	R_x	R_y	+ .0044	+ .0309	+ .1232	+ .1911	+ .3079	+ .4185						
$a/b = 1/2$	1.0	+ .0166	+ .0221	+ .0167	+ .0100	+ .0046	+ .0013	0	0	0	0	0	0	0
	0.8	+ .1402	+ .0295	+ .0177	+ .0090	+ .0032	+ .0003	0	+ .0059	+ .0032	+ .0010	- .0007	- .0019	- .0026
	0.6	+ .1953	+ .0334	+ .0174	+ .0069	+ .0009	- .0013	0	+ .0067	+ .0027	- .0010	- .0041	- .0064	- .0079
	0.4	+ .2311	+ .0309	+ .0135	+ .0037	- .0011	- .0021	0	+ .0062	+ .0012	- .0032	- .0067	- .0092	- .0109
	0.2	+ .1413	+ .0162	+ .0058	+ .0010	- .0005	- .0004	0	+ .0032	+ .0004	- .0012	- .0018	- .0018	- .0017
	0	- .0079	0	+ .0015	+ .0039	+ .0064	+ .0089	0	0	+ .0074	+ .0193	+ .0318	+ .0443	+ .0546
	R_x	R_y	- .0079	+ .0573	+ .1665	+ .2446	+ .3698	+ .4827						
$a/b = 3/4$	1.0	+ .0974	+ .0465	+ .0269	+ .0107	+ .0008	- .0028	0	0	0	0	0	0	0
	0.8	+ .2067	+ .0487	+ .0242	+ .0084	- .0002	- .0027	0	+ .0097	+ .0040	- .0004	- .0039	- .0065	- .0087
	0.6	+ .2303	+ .0459	+ .0195	+ .0046	- .0023	- .0036	0	+ .0092	+ .0020	- .0044	- .0053	- .0129	- .0155
	0.4	+ .2383	+ .0360	+ .0121	+ .0010	- .0030	- .0029	0	+ .0072	- .0003	- .0060	- .0096	- .0117	- .0132
	0.2	+ .1193	+ .0160	+ .0042	+ .0005	+ .0006	+ .0016	0	+ .0032	+ .0008	+ .0019	+ .0050	+ .0083	+ .0108
	0	- .0194	0	+ .0029	+ .0070	+ .0110	+ .0148	0	0	+ .0147	+ .0352	+ .0548	+ .0740	+ .0896
	R_x	R_y	- .0194	+ .1105	+ .2399	+ .3236	+ .4489	+ .5505						
$a/b = 1$	1.0	+ .1917	+ .0662	+ .0291	+ .0056	- .0059	- .0077	0	0	0	0	0	0	0
	0.8	+ .2481	+ .0613	+ .0243	+ .0035	- .0056	- .0063	0	+ .0123	+ .0039	- .0019	- .0059	- .0089	- .0115
	0.6	+ .2364	+ .0518	+ .0173	+ .0004	- .0059	- .0054	0	+ .0104	+ .0009	- .0064	- .0112	- .0144	- .0172
	0.4	+ .2289	+ .0368	+ .0092	- .0015	- .0041	- .0028	0	+ .0074	- .0015	- .0062	- .0078	- .0080	- .0084
	0.2	+ .1047	+ .0150	+ .0030	+ .0007	+ .0021	+ .0040	0	+ .0030	+ .0022	+ .0073	+ .0148	+ .0216	+ .0266
	0	- .0224	0	+ .0046	+ .0103	+ .0152	+ .0197	0	0	+ .0232	+ .0515	+ .0759	+ .0987	+ .1157
	R_x	R_y	- .0224	+ .1598	+ .2991	+ .3794	+ .4909	+ .5586						




Moment = (Coefficient) (pb²)
Reaction = (Coefficient) (pb)




POSITIVE SIGN CONVENTION

FIGURE 30 - Plate fixed along two adjacent edges, moment and reaction coefficients, Load IV, uniformly varying load.

	y/b	$R_x \Delta/\phi$	M_x							M_y						
			0	0.2	0.4	0.6	0.8	1.0		0	0.2	0.4	0.6	0.8	1.0	
$a/b = 1/8$	1.0	-0.0003	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	0		0	0	0	0	0	0	
	0.8	+0.0001	+0.0001	+0.0001	+0.0001	+0.0001	+0.0000	0		+0.0000	+0.0000	+0.0000	+0.0001	+0.0001	+0.0001	
	0.6	+0.0144	+0.0011	+0.0007	+0.0004	+0.0002	+0.0001	0		+0.0002	+0.0002	+0.0001	+0.0001	+0.0001	+0.0001	
	0.4	+0.0504	+0.0030	+0.0019	+0.0010	+0.0004	+0.0001	0		+0.0006	+0.0004	+0.0002	+0.0001	-0.0000	-0.0001	
	0.2	+0.0843	+0.0044	+0.0026	+0.0013	+0.0004	+0.0000	0		+0.0009	+0.0005	+0.0002	-0.0001	-0.0003	-0.0004	
	0	+0.0063	0	+0.0001	+0.0004	+0.0007	+0.0010	0		0	+0.0007	+0.0020	+0.0035	+0.0052	+0.0066	
		$R_x R_y$	+0.0063	+0.0019	+0.0013	+0.0004	+0.0007	+0.0010								
$a/b = 1/4$	1.0	-0.0057	+0.0005	+0.0007	+0.0007	+0.0005	+0.0003	0		0	0	0	0	0	0	
	0.8	+0.0031	+0.0017	+0.0014	+0.0011	+0.0007	+0.0003	0		+0.0003	+0.0003	+0.0004	+0.0005	+0.0006	+0.0007	
	0.6	+0.0331	+0.0048	+0.0032	+0.0019	+0.0009	+0.0002	0		+0.0010	+0.0007	+0.0005	+0.0004	+0.0003	+0.0002	
	0.4	+0.1010	+0.0096	+0.0053	+0.0023	+0.0005	-0.0002	0		+0.0019	+0.0009	+0.0000	-0.0007	-0.0013	-0.0017	
	0.2	+0.1288	+0.0098	+0.0045	+0.0014	-0.0002	-0.0006	0		+0.0020	+0.0006	-0.0007	-0.0018	-0.0026	-0.0032	
	0	-0.0472	0	+0.0004	+0.0012	+0.0021	+0.0029	0		0	+0.0022	+0.0061	+0.0103	+0.0146	+0.0181	
		$R_x R_y$	-0.0472	+0.0220	+0.0021	+0.0012	+0.0021	+0.0029								
$a/b = 3/8$	1.0	-0.0169	+0.0022	+0.0027	+0.0023	+0.0016	+0.0008	0		0	0	0	0	0	0	
	0.8	+0.0147	+0.0053	+0.0040	+0.0027	+0.0015	+0.0006	0		+0.0011	+0.0009	+0.0009	+0.0008	+0.0009	+0.0010	
	0.6	+0.0565	+0.0099	+0.0059	+0.0029	+0.0010	-0.0000	0		+0.0020	+0.0012	+0.0005	-0.0001	-0.0006	-0.0009	
	0.4	+0.1351	+0.0148	+0.0069	+0.0020	-0.0004	-0.0011	0		+0.0030	+0.0008	-0.0012	-0.0029	-0.0042	-0.0051	
	0.2	+0.1353	+0.0117	+0.0040	+0.0003	-0.0011	-0.0011	0		+0.0023	+0.0000	-0.0019	-0.0033	-0.0042	-0.0049	
	0	+0.0125	0	+0.0008	+0.0019	+0.0031	+0.0043	0		0	+0.0038	+0.0097	+0.0156	+0.0213	+0.0257	
		$R_x R_y$	+0.0125	+0.0460	+0.0236	+0.0174	+0.0238	+0.0319								
$a/b = 1/2$	1.0	-0.0220	+0.0052	+0.0053	+0.0039	+0.0023	+0.0010	0		0	0	0	0	0	0	
	0.8	+0.0298	+0.0095	+0.0065	+0.0038	+0.0018	+0.0005	0		+0.0019	+0.0014	+0.0010	+0.0006	+0.0004	+0.0003	
	0.6	+0.0753	+0.0143	+0.0076	+0.0030	+0.0004	-0.0005	0		+0.0029	+0.0014	-0.0001	-0.0014	-0.0025	-0.0031	
	0.4	+0.1508	+0.0178	+0.0068	+0.0010	-0.0015	-0.0017	0		+0.0036	+0.0002	-0.0028	-0.0052	-0.0070	-0.0082	
	0.2	+0.1313	+0.0119	+0.0030	-0.0005	-0.0014	-0.0010	0		+0.0024	-0.0005	-0.0025	-0.0036	-0.0041	-0.0044	
	0	+0.0050	0	+0.0013	+0.0030	+0.0046	+0.0060	0		0	+0.0063	+0.0148	+0.0228	+0.0301	+0.0358	
		$R_x R_y$	+0.0050	+0.0755	+0.0416	+0.0232	+0.0132	+0.0073								
$a/b = 3/4$	1.0	-0.0036	+0.0130	+0.0092	+0.0045	+0.0012	-0.0003	0		0	0	0	0	0	0	
	0.8	+0.0540	+0.0163	+0.0090	+0.0036	+0.0005	-0.0006	0		+0.0033	+0.0018	+0.0005	-0.0007	-0.0016	-0.0023	
	0.6	+0.0917	+0.0191	+0.0079	+0.0016	-0.0012	-0.0016	0		+0.0038	+0.0009	-0.0020	-0.0043	-0.0060	-0.0072	
	0.4	+0.1561	+0.0193	+0.0048	-0.0011	-0.0027	-0.0022	0		+0.0039	-0.0014	-0.0055	-0.0081	-0.0097	-0.0108	
	0.2	+0.1218	+0.0110	+0.0011	-0.0012	-0.0010	-0.0002	0		+0.0022	-0.0013	-0.0023	-0.0017	-0.0006	+0.0002	
	0	-0.0000	0	+0.0024	+0.0049	+0.0070	+0.0088	0		0	+0.0118	+0.0246	+0.0348	+0.0438	+0.0507	
		$R_x R_y$	-0.0000	+0.1274	+0.0763	+0.0412	+0.0210	+0.0109								
$a/b = 1$	1.0	+0.0261	+0.0198	+0.0103	+0.0027	-0.0013	-0.0022	0		0	0	0	0	0	0	
	0.8	+0.0687	+0.0207	+0.0089	+0.0017	-0.0016	-0.0019	0		+0.0041	+0.0018	-0.0001	-0.0016	-0.0028	-0.0039	
	0.6	+0.0943	+0.0209	+0.0064	-0.0004	-0.0027	-0.0023	0		+0.0042	+0.0002	-0.0033	-0.0058	-0.0074	-0.0086	
	0.4	+0.1522	+0.0188	+0.0026	-0.0024	-0.0032	-0.0022	0		+0.0038	-0.0028	-0.0068	-0.0086	-0.0092	-0.0098	
	0.2	+0.1168	+0.0096	+0.0000	-0.0012	-0.0003	+0.0008	0		+0.0019	-0.0016	-0.0008	+0.0016	+0.0041	+0.0059	
	0	+0.0018	0	+0.0035	+0.0066	+0.0088	+0.0107	0		0	+0.0174	+0.0329	+0.0440	+0.0534	+0.0603	
		R_y	+0.0018	+0.1676	+0.0812	+0.0289	+0.0134	+0.0067								




Moment = (Coefficient)(pb^2)
Reaction = (Coefficient)(pb)




POSITIVE SIGN CONVENTION

FIGURE 31 - Plate fixed along two adjacent edges, moment and reaction coefficients, Load V , $2/3$ uniformly varying load.

	y/b	R_x	x/a	M_x						M_y					
				0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	-.0000	+.0000	+.0000	+.0000	+.0000	+.0000	+.0000	0	0	0	0	0	0	0
	0.8	-.0001	+.0000	+.0000	+.0000	+.0000	+.0000	+.0000	0	+.0000	+.0000	+.0000	+.0000	+.0000	+.0000
	0.6	-.0002	+.0001	+.0001	+.0000	+.0000	+.0000	+.0000	0	+.0000	+.0000	+.0000	+.0000	+.0000	+.0000
	0.4	+.0040	+.0005	+.0003	+.0002	+.0001	+.0001	+.0001	0	+.0001	+.0001	+.0001	+.0001	+.0001	+.0001
	0.2	+.0482	+.0023	+.0013	+.0006	+.0002	+.0002	+.0000	0	+.0005	+.0003	+.0001	+.0001	+.0001	+.0001
	0	+.0073	0	+.0001	+.0003	+.0006	+.0006	+.0008	0	0	+.0006	+.0016	+.0028	+.0040	+.0041
		R_x	R_y	+.0073	+.0091	+.0514	+.0864	+.1410	+.1925						
$a/b = 1/4$	1.0	-.0009	+.0001	+.0001	+.0001	+.0001	+.0001	+.0000	0	0	0	0	0	0	0
	0.8	-.0002	+.0002	+.0002	+.0002	+.0001	+.0001	+.0001	0	+.0000	+.0000	+.0001	+.0001	+.0001	+.0001
	0.6	+.0006	+.0006	+.0005	+.0004	+.0002	+.0001	+.0001	0	+.0001	+.0001	+.0002	+.0002	+.0002	+.0003
	0.4	+.0129	+.0020	+.0013	+.0007	+.0003	+.0000	+.0000	0	+.0004	+.0003	+.0002	+.0001	+.0001	+.0000
	0.2	+.0719	+.0047	+.0019	+.0004	+.0003	+.0004	+.0004	0	+.0009	+.0002	+.0005	+.0011	+.0015	+.0019
	0	-.0212	0	+.0003	+.0007	+.0011	+.0015	+.0015	0	0	+.0014	+.0037	+.0055	+.0073	+.0087
		R_x	R_y	-.0212	+.0365	+.0923	+.1295	+.1807	+.2166						
$a/b = 3/8$	1.0	-.0035	+.0002	+.0004	+.0004	+.0003	+.0002	+.0002	0	0	0	0	0	0	0
	0.8	+.0010	+.0007	+.0006	+.0005	+.0003	+.0001	+.0001	0	+.0001	+.0001	+.0002	+.0002	+.0002	+.0003
	0.6	+.0039	+.0015	+.0011	+.0006	+.0003	+.0001	+.0001	0	+.0003	+.0003	+.0003	+.0003	+.0002	+.0002
	0.4	+.0207	+.0032	+.0016	+.0006	+.0000	+.0002	+.0002	0	+.0006	+.0004	+.0000	+.0003	+.0005	+.0007
	0.2	+.0756	+.0051	+.0013	+.0004	+.0008	+.0007	+.0007	0	+.0010	+.0002	+.0013	+.0021	+.0026	+.0030
	0	+.0221	0	+.0005	+.0011	+.0018	+.0020	+.0020	0	0	+.0023	+.0055	+.0080	+.0102	+.0118
		R_x	R_y	+.0221	+.0592	+.1027	+.1249	+.1555	+.1699						
$a/b = 1/2$	1.0	-.0052	+.0006	+.0008	+.0007	+.0004	+.0002	+.0002	0	0	0	0	0	0	0
	0.8	+.0032	+.0014	+.0010	+.0007	+.0004	+.0001	+.0001	0	+.0003	+.0002	+.0002	+.0002	+.0002	+.0002
	0.6	+.0072	+.0023	+.0014	+.0007	+.0002	+.0002	+.0000	0	+.0005	+.0004	+.0002	+.0001	+.0000	+.0001
	0.4	+.0244	+.0038	+.0016	+.0003	+.0003	+.0004	+.0004	0	+.0008	+.0003	+.0003	+.0008	+.0012	+.0014
	0.2	+.0747	+.0049	+.0006	+.0008	+.0010	+.0007	+.0007	0	+.0010	+.0007	+.0019	+.0026	+.0030	+.0032
	0	+.0201	0	+.0007	+.0015	+.0020	+.0025	+.0025	0	0	+.0037	+.0074	+.0102	+.0124	+.0140
		R_x	R_y	+.0201	+.0795	+.1217	+.1402	+.1629	+.1705						
$a/b = 3/4$	1.0	-.0037	+.0017	+.0014	+.0008	+.0003	+.0000	+.0000	0	0	0	0	0	0	0
	0.8	+.0068	+.0024	+.0014	+.0006	+.0001	+.0001	+.0001	0	+.0005	+.0003	+.0002	+.0000	+.0001	+.0002
	0.6	+.0104	+.0031	+.0014	+.0003	+.0002	+.0002	+.0002	0	+.0006	+.0004	+.0000	+.0004	+.0007	+.0009
	0.4	+.0258	+.0041	+.0010	+.0003	+.0006	+.0005	+.0005	0	+.0008	+.0000	+.0009	+.0015	+.0019	+.0021
	0.2	+.0723	+.0041	+.0003	+.0010	+.0008	+.0005	+.0005	0	+.0008	+.0014	+.0024	+.0027	+.0026	+.0026
	0	+.0215	0	+.0012	+.0021	+.0027	+.0030	+.0030	0	0	+.0061	+.0106	+.0133	+.0152	+.0167
		R_x	R_y	+.0215	+.1079	+.1424	+.1539	+.1673	+.1710						
$a/b = 1$	1.0	+.0003	+.0027	+.0016	+.0005	+.0001	+.0003	+.0003	0	0	0	0	0	0	0
	0.8	+.0091	+.0031	+.0014	+.0003	+.0002	+.0003	+.0003	0	+.0006	+.0003	+.0001	+.0002	+.0003	+.0005
	0.6	+.0111	+.0034	+.0011	+.0000	+.0004	+.0003	+.0003	0	+.0007	+.0003	+.0003	+.0007	+.0010	+.0012
	0.4	+.0246	+.0039	+.0004	+.0006	+.0007	+.0004	+.0004	0	+.0008	+.0004	+.0013	+.0017	+.0019	+.0021
	0.2	+.0723	+.0034	+.0008	+.0010	+.0006	+.0003	+.0003	0	+.0007	+.0019	+.0025	+.0023	+.0019	+.0017
	0	+.0258	0	+.0016	+.0026	+.0030	+.0034	+.0034	0	0	+.0082	+.0128	+.0151	+.0168	+.0181
		R_y		+.0258	+.1252	+.1521	+.1595	+.1683	+.1704						




Moment = (Coefficient) (pb^2)
Reaction = (Coefficient) (pb)




POSITIVE SIGN CONVENTION

FIGURE 32 - Plate fixed along two adjacent edges, moment and reaction coefficients, Load VI, $1/3$ uniformly varying load.

	M_x								M_y					
	y/b	$R_x \backslash x/a$	0	0.2	0.4	0.6	0.8	1.0	0	0.2	0.4	0.6	0.8	1.0
$a/b = 1/8$	1.0	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	0	0	0	0	0	0	0
	0.8	-0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	-0.0001	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.4	-0.0001	+0.0001	+0.0001	+0.0000	+0.0000	+0.0000	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.2	+0.0137	+0.0006	+0.0004	+0.0002	+0.0001	+0.0000	0	+0.0001	+0.0001	+0.0001	+0.0000	+0.0000	+0.0000
	0	+0.0050	0	+0.0001	+0.0002	+0.0003	+0.0004	0	0	+0.0004	+0.0010	+0.0016	+0.0022	+0.0027
	$R_x \backslash R_y$		+0.0050	+0.0169	+0.0463	+0.0669	+0.0961	+0.1185						
$a/b = 1/4$	1.0	-0.0002	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	0	0	0	0	0	0	0
	0.8	-0.0001	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	-0.0001	+0.0001	+0.0001	+0.0001	+0.0000	+0.0000	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0001	+0.0001
	0.4	+0.0011	+0.0003	+0.0003	+0.0002	+0.0001	+0.0000	0	+0.0001	+0.0001	+0.0001	+0.0001	+0.0001	+0.0001
	0.2	+0.0202	+0.0012	+0.0005	+0.0001	-0.0001	-0.0001	0	+0.0002	+0.0001	-0.0000	-0.0001	-0.0002	-0.0003
	0	-0.0036	0	+0.0002	+0.0003	+0.0005	+0.0006	0	0	+0.0008	+0.0017	+0.0025	+0.0031	+0.0036
	$R_x \backslash R_y$		-0.0036	+0.0391	+0.0667	+0.0901	+0.0000	0						
$a/b = 3/8$	1.0	-0.0007	+0.0000	+0.0001	+0.0001	+0.0001	+0.0000	0	0	0	0	0	0	0
	0.8	+0.0001	+0.0001	+0.0001	+0.0001	+0.0001	+0.0000	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0001
	0.6	+0.0004	+0.0003	+0.0002	+0.0001	+0.0001	+0.0000	0	+0.0001	+0.0001	+0.0001	+0.0001	+0.0001	+0.0001
	0.4	+0.0026	+0.0006	+0.0003	+0.0001	+0.0000	-0.0000	0	+0.0001	+0.0001	+0.0001	+0.0000	-0.0000	-0.0000
	0.2	+0.0212	+0.0013	+0.0003	-0.0001	-0.0002	-0.0001	0	+0.0003	+0.0000	-0.0002	-0.0004	-0.0005	-0.0006
	0	+0.0194	0	+0.0002	+0.0004	+0.0006	+0.0007	0	0	+0.0011	+0.0022	+0.0030	+0.0035	+0.0038
	$R_x \backslash R_y$		+0.0194	+0.0511	+0.0673	+0.0740	+0.0825	+0.0846						
$a/b = 1/2$	1.0	-0.0010	+0.0001	+0.0001	+0.0001	+0.0001	+0.0000	0	0	0	0	0	0	0
	0.8	+0.0004	+0.0002	+0.0002	+0.0001	+0.0001	+0.0000	0	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000	+0.0000
	0.6	+0.0010	+0.0004	+0.0003	+0.0001	+0.0000	+0.0000	0	+0.0001	+0.0001	+0.0001	+0.0000	+0.0000	+0.0000
	0.4	+0.0033	+0.0007	+0.0003	+0.0001	-0.0000	-0.0001	0	+0.0001	+0.0001	+0.0000	-0.0001	-0.0001	-0.0002
	0.2	+0.0209	+0.0012	+0.0001	-0.0002	-0.0002	-0.0001	0	+0.0002	-0.0001	-0.0004	-0.0005	-0.0006	-0.0007
	0	+0.0202	0	+0.0003	+0.0005	+0.0007	+0.0008	0	0	+0.0015	+0.0027	+0.0034	+0.0039	+0.0043
	$R_x \backslash R_y$		+0.0202	+0.0591	+0.0732	+0.0780	+0.0835	+0.0813						
$a/b = 3/4$	1.0	-0.0009	+0.0003	+0.0002	+0.0001	+0.0001	+0.0000	0	0	0	0	0	0	0
	0.8	+0.0010	+0.0004	+0.0002	+0.0001	+0.0000	-0.0000	0	+0.0001	+0.0001	+0.0000	+0.0000	-0.0000	-0.0000
	0.6	+0.0016	+0.0005	+0.0003	+0.0001	-0.0000	-0.0000	0	+0.0001	+0.0001	+0.0000	-0.0000	-0.0001	-0.0001
	0.4	+0.0037	+0.0008	+0.0002	-0.0001	-0.0001	-0.0001	0	+0.0002	-0.0000	-0.0001	-0.0002	-0.0003	-0.0003
	0.2	+0.0204	+0.0010	-0.0001	-0.0003	-0.0002	-0.0001	0	+0.0002	-0.0003	-0.0005	-0.0006	-0.0006	-0.0006
	0	+0.0233	0	+0.0005	+0.0007	+0.0008	+0.0009	0	0	+0.0023	+0.0035	+0.0041	+0.0045	+0.0048
	$R_x \backslash R_y$		+0.0233	+0.0688	+0.0787	+0.0811	+0.0838	+0.0841						
$a/b = 1$	1.0	-0.0003	+0.0004	+0.0003	+0.0001	-0.0000	-0.0000	0	0	0	0	0	0	0
	0.8	+0.0014	+0.0005	+0.0002	+0.0001	-0.0000	-0.0000	0	+0.0001	+0.0001	+0.0000	-0.0000	-0.0000	-0.0001
	0.6	+0.0017	+0.0006	+0.0002	-0.0000	-0.0001	-0.0001	0	+0.0001	+0.0001	-0.0000	-0.0001	-0.0001	-0.0002
	0.4	+0.0035	+0.0007	+0.0001	-0.0001	-0.0001	-0.0001	0	+0.0001	-0.0000	-0.0002	-0.0003	-0.0003	-0.0003
	0.2	+0.0206	+0.0008	-0.0002	-0.0002	-0.0002	-0.0001	0	+0.0002	-0.0004	-0.0006	-0.0005	-0.0005	-0.0005
	0	+0.0270	0	+0.0006	+0.0008	+0.0009	+0.0010	0	0	+0.0028	+0.0040	+0.0045	+0.0048	+0.0050
	$R_x \backslash R_y$		+0.0270	+0.0739	+0.0808	+0.0822	+0.0838	+0.0839						




Moment = (Coefficient) (pb²)
Reaction = (Coefficient) (pb)




POSITIVE SIGN CONVENTION

FIGURE 33 - Plate fixed along two adjacent edges, moment and reaction coefficients, Load VII, 1/6 uniformly varying load.

		M_x								M_y							
y/b	x/a	0	0.05	0.1	0.2	0.3	0.4	0.5		0	0.05	0.1	0.2	0.3	0.4	0.5	
$a/b = 3/8$	0.5	+0.5055	+0.0830	+0.0590	+0.0376	+0.0024	-0.0226	-0.0375	-0.0424	+0.0166	+0.0118	+0.0074	+0.0002	-0.0050	-0.0082	-0.0093	
	0.4	+0.5068	+0.0825	+0.0585	+0.0371	+0.0022	-0.0225	-0.0372	-0.0420	+0.0165	+0.0117	+0.0073	-0.0001	-0.0055	-0.0088	-0.0099	
	0.3	+0.5060	+0.0796	+0.0558	+0.0348	+0.0013	-0.0219	-0.0355	-0.0400	+0.0159	+0.0110	+0.0065	-0.0013	-0.0071	-0.0108	-0.0120	
	0.2	+0.4778	+0.0690	+0.0470	+0.0282	-0.0004	-0.0192	-0.0299	-0.0334	+0.0138	+0.0091	+0.0046	-0.0034	-0.0095	-0.0132	-0.0145	
	0.1	+0.3316	+0.0400	+0.0254	+0.0139	-0.0017	-0.0108	-0.0155	-0.0170	+0.0080	+0.0047	+0.0017	-0.0033	-0.0066	-0.0084	-0.0090	
	0.05	+0.1331	+0.0170	+0.0108	+0.0060	+0.0001	-0.0026	-0.0037	-0.0039	+0.0034	+0.0026	+0.0026	+0.0044	+0.0071	+0.0094	+0.0102	
	0	-0.0513	0	+0.0005	+0.0016	+0.0047	+0.0076	+0.0096	+0.0103	0	+0.0024	+0.0078	+0.0234	+0.0381	+0.0481	+0.0516	
	R_x	-0.0513	-0.0797	+0.0291	+0.2203	+0.3559	+0.4352	+0.4612									
	R_y	0	-0.0005	-0.0016	-0.0047	-0.0076	-0.0096	-0.0103									
$a/b = 1/2$	0.5	+0.5142	+0.0815	+0.0573	+0.0359	+0.0015	-0.0224	-0.0365	-0.0411	+0.0163	+0.0113	+0.0068	-0.0012	-0.0071	-0.0108	-0.0121	
	0.4	+0.5111	+0.0797	+0.0557	+0.0346	+0.0011	-0.0220	-0.0355	-0.0399	+0.0159	+0.0110	+0.0064	-0.0017	-0.0078	-0.0116	-0.0129	
	0.3	+0.4928	+0.0728	+0.0499	+0.0303	-0.0000	-0.0203	-0.0319	-0.0356	+0.0146	+0.0097	+0.0051	-0.0031	-0.0093	-0.0132	-0.0145	
	0.2	+0.4260	+0.0568	+0.0375	+0.0217	-0.0014	-0.0159	-0.0238	-0.0263	+0.0114	+0.0071	+0.0030	-0.0042	-0.0096	-0.0128	-0.0139	
	0.1	+0.2350	+0.0270	+0.0168	+0.0090	-0.0011	-0.0066	-0.0092	-0.0100	+0.0054	+0.0032	+0.0014	-0.0006	-0.0013	-0.0013	-0.0012	
	0.05	+0.0591	+0.0099	+0.0066	+0.0039	+0.0011	+0.0003	+0.0003	+0.0003	+0.0020	+0.0022	+0.0034	+0.0082	+0.0135	+0.0174	+0.0188	
	0	-0.0496	0	+0.0005	+0.0016	+0.0049	+0.0080	+0.0100	+0.0108	0	+0.0025	+0.0082	+0.0247	+0.0399	+0.0502	+0.0538	
	R_x	-0.0496	-0.0631	+0.0371	+0.2253	+0.3598	+0.4382	+0.4638									
	R_y	0	-0.0005	-0.0016	-0.0049	-0.0080	-0.0100	-0.0108									
$a/b = 5/8$	0.5	+0.5143	+0.0765	+0.0526	+0.0319	-0.0001	-0.0214	-0.0336	-0.0376	+0.0153	+0.0102	+0.0054	-0.0033	-0.0101	-0.0144	-0.0159	
	0.4	+0.5045	+0.0736	+0.0502	+0.0302	-0.0004	-0.0207	-0.0321	-0.0358	+0.0147	+0.0097	+0.0050	-0.0037	-0.0104	-0.0147	-0.0161	
	0.3	+0.4660	+0.0642	+0.0429	+0.0251	-0.0012	-0.0181	-0.0274	-0.0304	+0.0128	+0.0082	+0.0037	-0.0045	-0.0107	-0.0146	-0.0159	
	0.2	+0.3697	+0.0462	+0.0297	+0.0166	-0.0017	-0.0127	-0.0186	-0.0204	+0.0092	+0.0055	+0.0020	-0.0039	-0.0082	-0.0106	-0.0114	
	0.1	+0.1635	+0.0191	+0.0119	+0.0065	-0.0004	-0.0037	-0.0052	-0.0056	+0.0038	+0.0025	+0.0018	+0.0022	+0.0036	+0.0050	+0.0056	
	0.05	+0.0150	+0.0063	+0.0046	+0.0030	+0.0018	+0.0020	+0.0025	+0.0028	+0.0013	+0.0021	+0.0042	+0.0110	+0.0180	+0.0231	+0.0249	
	0	-0.0454	0	+0.0005	+0.0017	+0.0050	+0.0082	+0.0102	+0.0109	0	+0.0025	+0.0083	+0.0252	+0.0408	+0.0511	+0.0547	
	R_x	-0.0454	-0.0527	+0.0410	+0.2277	+0.3616	+0.4394	+0.4648									
	R_y	0	-0.0005	-0.0017	-0.0050	-0.0082	-0.0102	-0.0109									
$a/b = 3/4$	0.5	+0.4999	+0.0686	+0.0457	+0.0265	-0.0017	-0.0196	-0.0293	-0.0324	+0.0137	+0.0087	+0.0037	-0.0055	-0.0128	-0.0175	-0.0191	
	0.4	+0.4845	+0.0653	+0.0432	+0.0248	-0.0019	-0.0186	-0.0277	-0.0306	+0.0131	+0.0082	+0.0034	-0.0056	-0.0126	-0.0171	-0.0186	
	0.3	+0.4311	+0.0550	+0.0357	+0.0200	-0.0022	-0.0156	-0.0227	-0.0249	+0.0110	+0.0066	+0.0024	-0.0054	-0.0113	-0.0150	-0.0162	
	0.2	+0.3179	+0.0374	+0.0235	+0.0126	-0.0019	-0.0101	-0.0142	-0.0155	+0.0075	+0.0043	+0.0014	-0.0033	-0.0064	-0.0081	-0.0086	
	0.1	+0.1133	+0.0140	+0.0089	+0.0049	+0.0001	-0.0018	-0.0025	-0.0026	+0.0028	+0.0021	+0.0023	+0.0045	+0.0074	+0.0098	+0.0107	
	0.05	-0.0109	+0.0043	+0.0034	+0.0024	+0.0022	+0.0031	+0.0039	+0.0043	+0.0009	+0.0021	+0.0048	+0.0129	+0.0210	+0.0268	+0.0288	
	0	-0.0412	0	+0.0005	+0.0017	+0.0051	+0.0082	+0.0102	+0.0109	0	+0.0024	+0.0083	+0.0254	+0.0409	+0.0511	+0.0546	
	R_x	-0.0412	-0.0457	+0.0445	+0.2305	+0.3626	+0.4384	+0.4629									
	R_y	0	-0.0005	-0.0017	-0.0051	-0.0082	-0.0102	-0.0109									
$a/b = 7/8$	0.5	+0.4730	+0.0592	+0.0380	+0.0208	-0.0031	-0.0172	-0.0245	-0.0267	+0.0118	+0.0070	+0.0021	-0.0072	-0.0146	-0.0193	-0.0209	
	0.4	+0.4542	+0.0560	+0.0356	+0.0193	-0.0031	-0.0162	-0.0229	-0.0250	+0.0112	+0.0065	+0.0018	-0.0070	-0.0139	-0.0183	-0.0198	
	0.3	+0.3928	+0.0462	+0.0288	+0.0153	-0.0029	-0.0131	-0.0183	-0.0198	+0.0092	+0.0052	+0.0012	-0.0059	-0.0113	-0.0146	-0.0157	
	0.2	+0.2736	+0.0302	+0.0184	+0.0094	-0.0020	-0.0079	-0.0107	-0.0114	+0.0060	+0.0033	+0.0010	-0.0026	-0.0047	-0.0057	-0.0061	
	0.1	+0.0798	+0.0106	+0.0068	+0.0037	+0.0005	-0.0005	-0.0006	-0.0006	+0.0021	+0.0019	+0.0027	+0.0060	+0.0099	+0.0129	+0.0139	
	0.05	-0.0250	+0.0031	+0.0026	+0.0021	+0.0025	+0.0037	+0.0047	+0.0051	+0.0006	+0.0021	+0.0051	+0.0140	+0.0226	+0.0285	+0.0306	
	0	-0.0377	0	+0.0005	+0.0017	+0.0050	+0.0080	+0.0099	+0.0106	0	+0.0024	+0.0083	+0.0251	+0.0400	+0.0497	+0.0530	
	R_x	-0.0377	-0.0391	+0.0503	+0.2341	+0.3608	+0.4319	+0.4546									
	R_y	0	-0.0005	-0.0017	-0.0050	-0.0080	-0.0099	-0.0106									
$a/b = 1$	0.5	+0.4389	+0.0500	+0.0306	+0.0156	-0.0040	-0.0147	-0.0198	-0.0213	+0.0100	+0.0054	+0.0007	-0.0082	-0.0153	-0.0197	-0.0213	
	0.4	+0.4189	+0.0470	+0.0286	+0.0144	-0.0039	-0.0137	-0.0184	-0.0197	+0.0094	+0.0050	+0.0006	-0.0078	-0.0143	-0.0184	-0.0198	
	0.3	+0.3551	+0.0382	+0.0229	+0.0112	-0.0033	-0.0109	-0.0143	-0.0153	+0.0076	+0.0040	+0.0003	-0.0061	-0.0109	-0.0137	-0.0147	
	0.2	+0.2373	+0.0244	+0.0143	+0.0068	-0.0020	-0.0061	-0.0078	-0.0082	+0.0049	+0.0026	+0.0007	-0.0020	-0.0033	-0.0039	-0.0040	
	0.1	+0.0585	+0.0082	+0.0052	+0.0028	+0.0007	+0.0003	+0.0006	+0.0007	+0.0016	+0.0018	+0.0028	+0.0068	+0.0112	+0.0144	+0.0156	
	0.05	-0.0316	+0.0024	+0.0021	+0.0018	+0.0026	+0.0040	+0.0050	+0.0054	+0.0005	+0.0021	+0.0052	+0.0143	+0.0229	+0.0286	+0.0306	
	0	-0.0331	0	+0.0005	+0.0016	+0.0049	+0.0076	+0.0094	+0.0100	0	+0.0024	+0.0082	+0.0244	+0.0382	+0.0470	+0.0500	
	R_x	-0.0331	-0.0316	+0.0585	+0.2373	+0.3551	+0.4189	+0.4389									
	R_y	0	-0.0005	-0.0016	-0.0049	-0.0076	-0.0094	-0.0100									

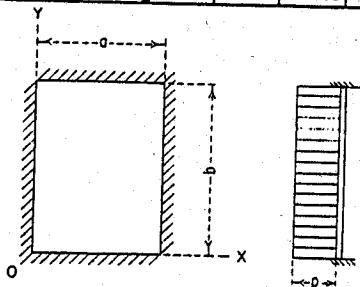


Moment = (Coefficient)(pa^2)
Reaction = (Coefficient)(pa)




POSITIVE SIGN CONVENTION

FIGURE 34 - Plate fixed along four edges, moment and reaction coefficients, Load I, uniform load.

		M_x								M_y							
y/b	x/a	0	0.05	0.1	0.2	0.3	0.4	0.5		0	0.05	0.1	0.2	0.3	0.4	0.5	
$a/b = 3/8$	0.5	0	0	0	0	0	0	0		0	0	0	0	0	0	0	
	0.4	+0.1047	+0.0162	+0.0113	+0.0070	+0.0002	-0.0045	-0.0072	-0.0081	+0.0032	+0.0022	+0.0013	-0.0004	-0.0017	-0.0026	-0.0028	
	0.3	+0.2066	+0.0305	+0.0209	+0.0126	-0.0001	-0.0086	-0.0134	-0.0149	+0.0061	+0.0041	+0.0021	-0.0014	-0.0042	-0.0060	-0.0066	
	0.2	+0.2851	+0.0379	+0.0249	+0.0142	-0.0012	-0.0108	-0.0160	-0.0176	+0.0076	+0.0047	+0.0018	-0.0034	-0.0076	-0.0102	-0.0111	
	0.1	+0.2574	+0.0278	+0.0167	+0.0083	-0.0022	-0.0078	-0.0103	-0.0111	+0.0056	+0.0029	+0.0004	-0.0041	-0.0072	-0.0089	-0.0095	
	0.05	+0.1363	+0.0135	+0.0077	+0.0036	-0.0007	-0.0024	-0.0029	-0.0030	+0.0027	+0.0016	+0.0010	+0.0013	+0.0024	+0.0035	+0.0039	
	0	-0.0376	0	+0.0004	+0.0012	+0.0034	+0.0054	+0.0067	+0.0071	0	+0.0019	+0.0059	+0.0170	+0.0269	+0.0334	+0.0356	
	R_x	R_y	-0.0376	-0.0368	+0.0540	+0.1962	+0.2885	+0.3395	+0.3557								
$a/b = 1/2$	0.5	0	0	0	0	0	0	0		0	0	0	0	0	0	0	
	0.4	+0.1041	+0.0142	+0.0094	+0.0054	-0.0004	-0.0041	-0.0060	-0.0067	+0.0028	+0.0018	+0.0007	-0.0013	-0.0029	-0.0039	-0.0043	
	0.3	+0.1963	+0.0251	+0.0162	+0.0090	-0.0012	-0.0073	-0.0105	-0.0114	+0.0050	+0.0030	+0.0010	-0.0029	-0.0060	-0.0080	-0.0087	
	0.2	+0.2490	+0.0282	+0.0173	+0.0088	-0.0022	-0.0082	-0.0111	-0.0120	+0.0056	+0.0030	+0.0004	-0.0045	-0.0083	-0.0107	-0.0114	
	0.1	+0.1921	+0.0176	+0.0096	+0.0041	-0.0020	-0.0046	-0.0055	-0.0058	+0.0035	+0.0016	-0.0002	-0.0029	-0.0045	-0.0052	-0.0054	
	0.05	+0.0860	+0.0077	+0.0041	+0.0017	-0.0002	-0.0005	-0.0003	-0.0002	+0.0016	+0.0011	+0.0012	+0.0030	+0.0053	+0.0070	+0.0076	
	0	-0.0355	0	+0.0004	+0.0012	+0.0032	+0.0049	+0.0060	+0.0064	0	+0.0019	+0.0059	+0.0161	+0.0247	+0.0301	+0.0319	
	R_x	R_y	-0.0355	-0.0159	+0.0675	+0.1938	+0.2707	+0.3111	+0.3236								
$a/b = 5/8$	0.5	0	0	0	0	0	0	0		0	0	0	0	0	0	0	
	0.4	+0.0965	+0.0112	+0.0069	+0.0035	-0.0009	-0.0033	-0.0045	-0.0048	+0.0022	+0.0012	+0.0002	-0.0019	-0.0035	-0.0046	-0.0050	
	0.3	+0.1763	+0.0192	+0.0115	+0.0056	-0.0019	-0.0057	-0.0075	-0.0080	+0.0038	+0.0020	+0.0000	-0.0037	-0.0067	-0.0086	-0.0092	
	0.2	+0.2120	+0.0204	+0.0115	+0.0049	-0.0025	-0.0060	-0.0074	-0.0077	+0.0041	+0.0016	-0.0005	-0.0047	-0.0078	-0.0097	-0.0103	
	0.1	+0.1495	+0.0117	+0.0058	+0.0019	-0.0016	-0.0027	-0.0029	-0.0030	+0.0023	+0.0008	-0.0004	-0.0019	-0.0025	-0.0026	-0.0026	
	0.05	+0.0601	+0.0049	+0.0024	+0.0009	+0.0001	+0.0004	+0.0007	+0.0009	+0.0010	+0.0008	+0.0013	+0.0037	+0.0063	+0.0080	+0.0086	
	0	-0.0324	0	+0.0004	+0.0011	+0.0029	+0.0043	+0.0051	+0.0054	0	+0.0019	+0.0056	+0.0146	+0.0215	+0.0257	+0.0271	
	R_x	R_y	-0.0324	+0.0006	+0.0781	+0.1882	+0.2497	+0.2798	+0.2888								
$a/b = 3/4$	0.5	0	0	0	0	0	0	0		0	0	0	0	0	0	0	
	0.4	+0.0860	+0.0085	+0.0048	+0.0021	-0.0011	-0.0026	-0.0032	-0.0033	+0.0017	+0.0008	-0.0002	-0.0021	-0.0037	-0.0046	-0.0049	
	0.3	+0.1545	+0.0144	+0.0078	+0.0031	-0.0021	-0.0043	-0.0052	-0.0053	+0.0029	+0.0012	-0.0005	-0.0039	-0.0065	-0.0081	-0.0086	
	0.2	+0.1807	+0.0149	+0.0075	+0.0025	-0.0025	-0.0043	-0.0048	-0.0049	+0.0030	+0.0010	-0.0010	-0.0045	-0.0069	-0.0083	-0.0087	
	0.1	+0.1218	+0.0082	+0.0035	+0.0008	-0.0013	-0.0016	-0.0015	-0.0015	+0.0016	+0.0004	-0.0005	-0.0013	-0.0013	-0.0011	-0.0010	
	0.05	+0.0459	+0.0034	+0.0014	+0.0005	+0.0003	+0.0007	+0.0011	+0.0012	+0.0007	+0.0007	+0.0014	+0.0038	+0.0062	+0.0077	+0.0082	
	0	-0.0294	0	+0.0004	+0.0011	+0.0026	+0.0037	+0.0043	+0.0045	0	+0.0019	+0.0053	+0.0129	+0.0183	+0.0213	+0.0223	
	R_x	R_y	-0.0294	+0.0134	+0.0861	+0.1804	+0.2278	+0.2491	+0.2551								
$a/b = 7/8$	0.5	0	0	0	0	0	0	0		0	0	0	0	0	0	0	
	0.4	+0.0758	+0.0065	+0.0033	+0.0011	-0.0011	-0.0020	-0.0022	-0.0023	+0.0013	+0.0005	-0.0004	-0.0021	-0.0034	-0.0042	-0.0045	
	0.3	+0.1350	+0.0108	+0.0053	+0.0016	-0.0020	-0.0033	-0.0035	-0.0036	+0.0022	+0.0007	-0.0009	-0.0038	-0.0059	-0.0071	-0.0075	
	0.2	+0.1560	+0.0111	+0.0049	+0.0011	-0.0022	-0.0031	-0.0032	-0.0032	+0.0022	+0.0005	-0.0012	-0.0041	-0.0059	-0.0069	-0.0072	
	0.1	+0.1028	+0.0060	+0.0022	+0.0002	-0.0010	-0.0010	-0.0008	-0.0007	+0.0012	+0.0002	-0.0002	-0.0008	-0.0006	-0.0003	-0.0002	
	0.05	+0.0371	+0.0024	+0.0009	+0.0003	+0.0004	+0.0008	+0.0011	+0.0012	+0.0005	+0.0006	+0.0013	+0.0037	+0.0057	+0.0069	+0.0073	
	0	-0.0266	0	+0.0004	+0.0010	+0.0022	+0.0031	+0.0035	+0.0036	0	+0.0019	+0.0050	+0.0112	+0.0153	+0.0175	+0.0181	
	R_x	R_y	-0.0266	+0.0234	+0.0916	+0.1712	+0.2068	+0.2212	+0.2250								
$a/b = 1$	0.5	0	0	0	0	0	0	0		0	0	0	0	0	0	0	
	0.4	+0.0670	+0.0050	+0.0023	+0.0005	-0.0011	-0.0015	-0.0016	-0.0016	+0.0010	+0.0003	-0.0005	-0.0020	-0.0031	-0.0037	-0.0039	
	0.3	+0.1190	+0.0083	+0.0036	+0.0006	-0.0019	-0.0025	-0.0025	-0.0024	+0.0017	+0.0003	-0.0011	-0.0035	-0.0052	-0.0061	-0.0064	
	0.2	+0.1366	+0.0084	+0.0033	+0.0002	-0.0019	-0.0023	-0.0022	-0.0021	+0.0017	+0.0002	-0.0013	-0.0036	-0.0050	-0.0057	-0.0059	
	0.1	+0.0889	+0.0045	+0.0014	-0.0001	-0.0007	-0.0006	-0.0004	-0.0003	+0.0009	+0.0001	-0.0005	-0.0006	-0.0003	+0.0000	+0.0001	
	0.05	+0.0310	+0.0018	+0.0006	+0.0002	+0.0004	+0.0008	+0.0011	+0.0011	+0.0004	+0.0005	+0.0013	+0.0034	+0.0050	+0.0059	+0.0062	
	0	-0.0241	0	+0.0004	+0.0009	+0.0020	+0.0026	+0.0029	+0.0030	0	+0.0018	+0.0046	+0.0098	+0.0128	+0.0143	+0.0148	
	R_x	R_y	-0.0241	+0.0311	+0.0948	+0.1614	+0.1877	+0.1971	+0.1994								

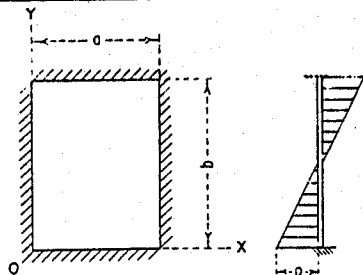


Moment = (Coefficient)(pa^2)
Reaction = (Coefficient)(pa)



POSITIVE SIGN CONVENTION

FIGURE 35 - Plate fixed along four edges, moment and reaction coefficients, Load X , uniformly varying load, $p = 0$ along $x = a/2$.

y/b	R_x	x/a	$a/b = 3/8$								$a/b = 1/2$								$a/b = 5/8$								$a/b = 3/4$								$a/b = 7/8$								$a/b = 1$																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
			0	0.05	0.1	0.2	0.3	0.4	0.5	0	0.05	0.1	0.2	0.3	0.4	0.5	0	0.05	0.1	0.2	0.3	0.4	0.5	0	0.05	0.1	0.2	0.3	0.4	0.5	0	0.05	0.1	0.2	0.3	0.4	0.5	0	0.05	0.1	0.2	0.3	0.4	0.5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
0.5	+1.988	+0.161	+0.073	+0.008	-0.064	-0.076	-0.048	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0	+0.032	+0.015	+0.002	-0.013	-0.015	-0.010	0

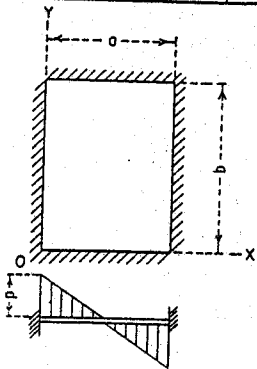

Moment = (Coefficient)(pa^2)
Reaction = (Coefficient)(pa)




FIGURE 36 - Plate fixed along four edges, moment and reaction coefficients, Load XI, uniformly varying load, $p = 0$ along $x = b/2$.

APPENDIX I

An application to a Design Problem

This appendix illustrates use of the tabulated coefficients by an application to a typical design problem. Figure 37 shows essential dimensions and typical loads acting on an interior panel of a counterfort retaining wall. Both wall and heel slabs approximate the condition of a plate fixed along three edges and free along the fourth. The variations in thickness of the wall slab and the relatively great thickness of the heel slab compared with its lesser lateral dimension are both, perhaps to some degree, in violation of basic assumptions. Ignoring these, however, is done with the conviction that results obtained in this manner are more nearly correct than what might be determined by other available methods.

Center line dimensions have been used for both slabs. The net loads, as determined

from equilibrium conditions, have been broken into components similar to certain of the typical Loads I through XI. These are illustrated together with a table of their numerical values in Figure 37.

It will be noted that for the wall slab, $r = a/b = 0.2$. This requires interpolation on r for the various loads and in the case of p_s , interpolation both on r and the load. For the heel slab, $r = a/b = 1/2$, and since both component loads act over the full area, no interpolation is required.

For illustrative purposes, moments have been computed along the assumed lines of support for both the wall and heel slabs. Where interpolation was required to obtain the moment coefficients, second degree interpolation was used. The moment coefficients and actual computed moments are given in Tables III through VI.

TABLE III

M_x for Heel Slab at Supports

Values of $pb^2 \rightarrow$		Moment coefficients		Moments (foot-kips)		Total moment (foot-kips)
$\frac{x}{a}$	$\frac{y}{b}$	1118.5 P_u	-1032.3 P_v	M_u	M_v	
0	1.0	+0.0852	+0.0151	+95.30	-15.59	+79.7
0	0.8	+0.0807	+0.0216	+90.26	-22.30	+68.0
0	0.6	+0.0712	+0.0273	+79.64	-28.18	+51.5
0	0.4	+0.0545	+0.0277	+60.96	-28.59	+32.4
0	0.2	+0.0250	+0.0160	+27.96	-16.52	+11.4
0	0	0	0	0	0	0
0.2	0	+0.0019	+0.0014	+2.13	-1.45	+0.7
0.4	0	+0.0050	+0.0033	+5.59	-3.41	+2.2
0.6	0	+0.0080	+0.0050	+8.95	-5.16	+3.8
0.8	0	+0.0100	+0.0061	+11.18	-6.30	+4.9
1.0	0	+0.0107	+0.0065	+11.97	-6.71	+5.3

TABLE IV

 M_y for Heel Slab at Supports

Values of $pb^2 \rightarrow$		Moment coefficients.		Moments (foot-kips)		Total moment (foot-kips)
$\frac{x}{a}$	$\frac{y}{b}$	1118.5 P_u	-1032.3 P_v	M_u	M_v	
0	1.0	0	0	0	0	0
0	0.8	+0.0161	+0.0043	+18.01	-4.44	+13.6
0	0.6	+0.0142	+0.0055	+15.88	-5.68	+10.2
0	0.4	+0.0109	+0.0055	+12.19	-5.68	+6.5
0	0.2	+0.0050	+0.0032	+5.59	-3.30	+2.3
0	0	0	0	0	0	0
0.2	0	+0.0094	+0.0068	+10.51	-7.02	+3.5
0.4	0	+0.0252	+0.0167	+28.19	-17.24	+11.0
0.6	0	+0.0399	+0.0252	+44.63	-26.01	+18.6
0.8	0	+0.0499	+0.0307	+55.81	-31.69	+24.1
1.0	0	+0.0534	+0.0325	+59.73	-33.55	+26.2

TABLE V

 M_x for Wall Slab at Supports

Values of pb ² →		Moment coefficients				Moments (foot-kips)				Total moment (foot-kips)
		-985.5	157.7	1905.4	1392.9					
$\frac{x}{a}$	$\frac{y}{b}$	P _w	P _q	P _e	P _s	M _w	M _q	M _e	M _s	
0	1.0	-0.0000	+0.0133	+0.0012	+0.0004	+0.00	+2.10	+2.29	+0.56	+5.0
0	0.8	+0.0000	+0.0131	+0.0028	+0.0012	-0.00	+2.07	+5.34	+1.67	+9.1
0	0.6	+0.0000	+0.0134	+0.0054	+0.0034	-0.00	+2.11	+10.29	+4.74	+17.1
0	0.4	+0.0009	+0.0133	+0.0079	+0.0068	-0.89	+2.10	+15.05	+9.47	+25.7
0	0.2	+0.0032	+0.0103	+0.0079	+0.0075	-3.15	+1.62	+15.05	+10.45	+24.0
0	0	0	0	0	0	0	0	0	0	0
0.2	0	+0.0002	+0.0003	+0.0003	+0.0003	-0.20	+0.05	+0.57	+0.42	+0.8
0.4	0	+0.0005	+0.0009	+0.0007	+0.0006	-0.49	+0.14	+1.33	+0.84	+1.8
0.6	0	+0.0007	+0.0013	+0.0011	+0.0011	-0.69	+0.21	+2.10	+1.53	+3.2
0.8	0	+0.0009	+0.0016	+0.0014	+0.0014	-0.89	+0.25	+2.67	+1.95	+4.0
1.0	0	+0.0010	+0.0018	+0.0015	+0.0015	-0.99	+0.28	+2.86	+2.09	+4.2

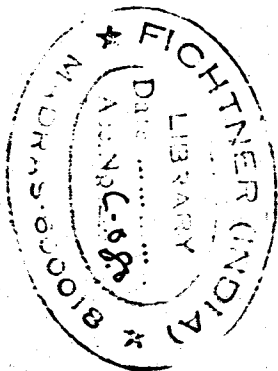


TABLE VI

 M_y for Wall Slab at Supports

Values of pb ² →		Moment coefficients				Moments (foot-kips)				Total moment (foot-kips)
		-985.5	157.7	1905.4	1392.9					
$\frac{x}{a}$	$\frac{y}{b}$	P _w	P _q	P _e	P _s	M _w	M _q	M _e	M _s	
0	1.0	0	0	0	0	0	0	0	0	0
0	0.8	-0.0000	+0.0026	+0.0005	+0.0002	+0.00	+0.41	+0.95	+0.28	+1.6
0	0.6	+0.0000	+0.0027	+0.0011	+0.0007	-0.00	+0.43	+2.10	+0.98	+3.5
0	0.4	+0.0002	+0.0026	+0.0016	+0.0014	-0.20	+0.41	+3.05	+1.95	+5.2
0	0.2	+0.0006	+0.0020	+0.0016	+0.0015	-0.59	+0.32	+3.05	+2.09	+4.9
0	0	0	0	0	0	0	0	0	0	0
0.2	0	+0.0011	+0.0015	+0.0014	+0.0014	-1.08	+0.24	+2.67	+1.95	+3.8
0.4	0	+0.0025	+0.0041	+0.0036	+0.0036	-2.46	+0.65	+6.86	+5.01	+10.1
0.6	0	+0.0036	+0.0066	+0.0056	+0.0055	-3.55	+1.04	+10.67	+7.66	+15.8
0.8	0	+0.0043	+0.0082	+0.0069	+0.0068	-4.24	+1.29	+13.15	+9.47	+19.7
1.0	0	+0.0046	+0.0088	+0.0074	+0.0072	-4.53	+1.39	+14.10	+10.03	+21.0

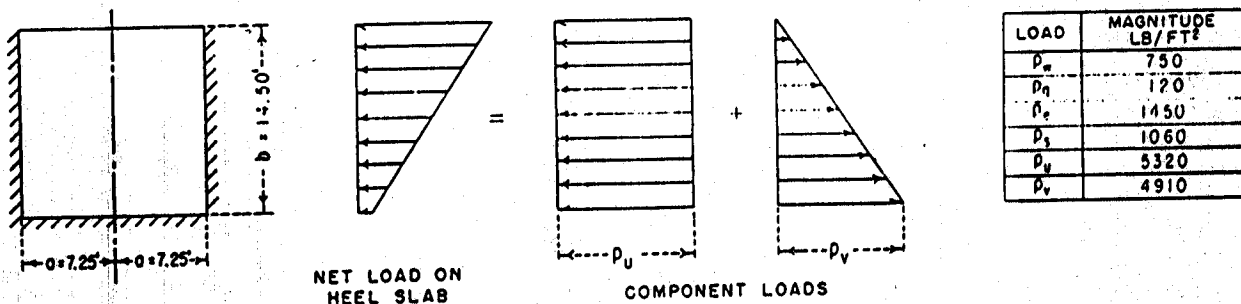
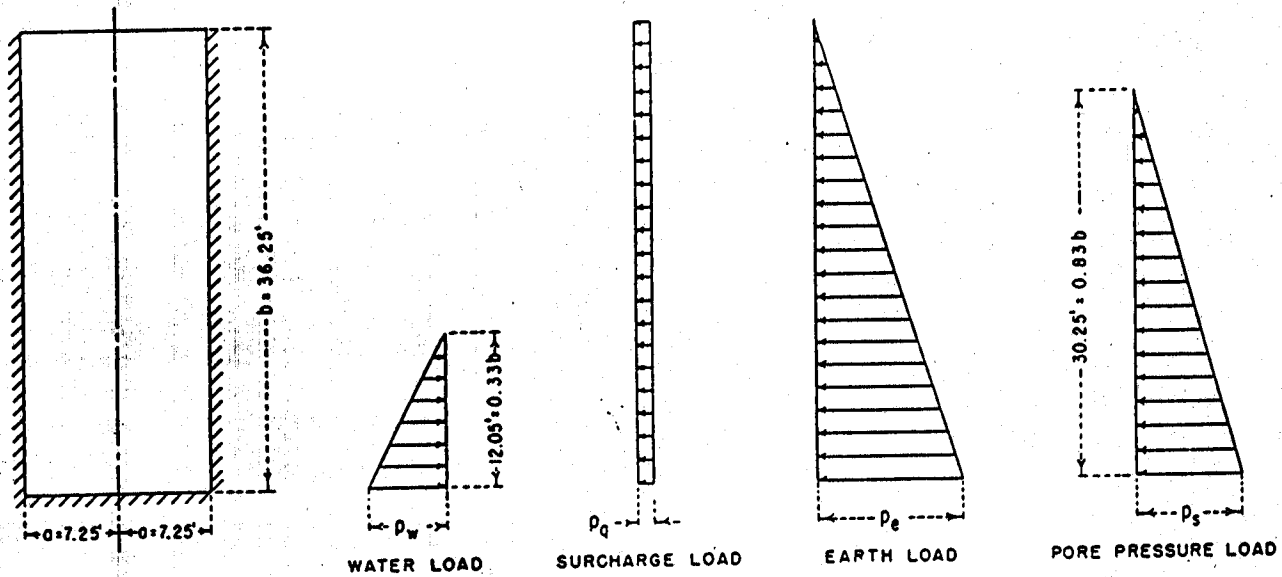
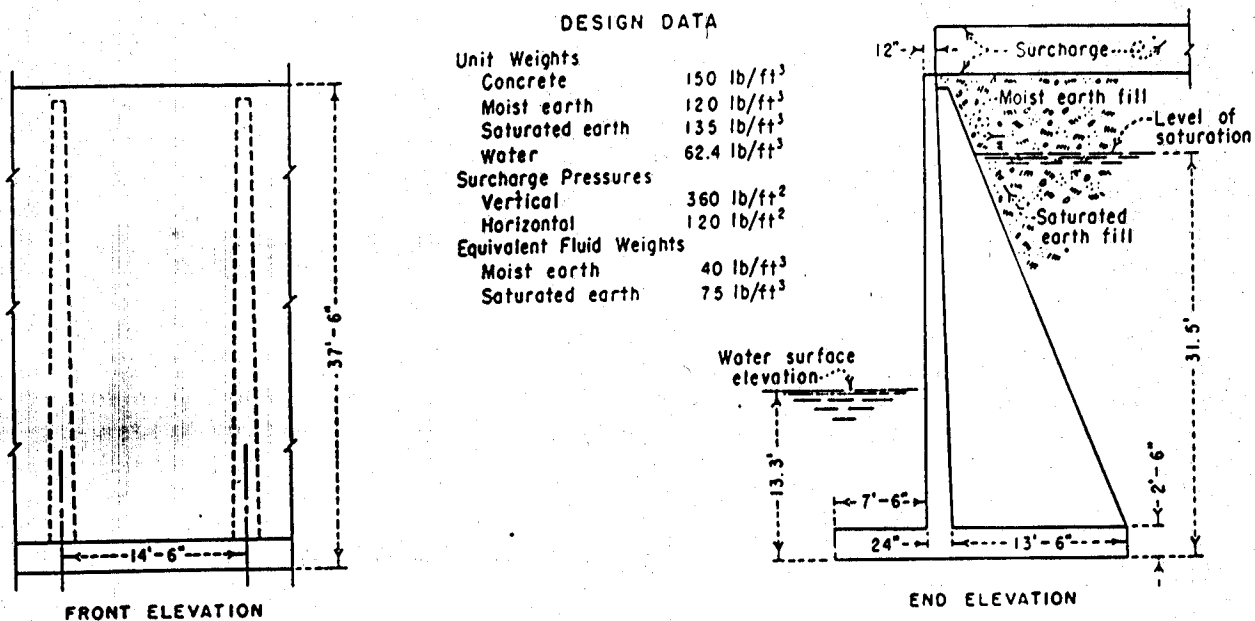


FIGURE 37 - Counterfort wall, design example.

APPENDIX II

The Finite Difference Method

Introduction

The bending of thin elastic plates or slabs subjected to loads normal to their surfaces has been studied by many investigators. 1 through 9 A large number of specific problems have been solved by exact or approximate means, and these results are available. (See, for instance, 3). Exact and certain approximate methods are frequently difficult to apply except to structures where some symmetry exists and where a simple loading is used. The finite difference method, however, is readily adaptable to rectangular plates having any of the usual edge conditions and subjected to any loading.

In Denmark, as early as 1918, N. J. Nielsen applied the finite difference method to the solution of plate problems. In his book 4 he has analyzed the problem in considerable detail and has given numerical solutions for a number of cases. H. Marcus published an excellent book 5 in Germany in 1924 on this subject in which he included numerous examples. In the United States, Wise, Holl, and Barton, 6, 7, 8 have contributed to the literature of finite difference solutions for rectangular plates, and Jensen 9 has extended the method to provide a useful tool in the analysis of skew slabs.

General Mathematical Relations

The partial differential equation, frequently called Lagrange's equation, which relates the rectangular coordinates, the load, the deflections, and the physical and elastic constants of a laterally loaded plate, is well known. Its application to the solution of problems of bending of plates or slabs is justified if the following conditions are met: (a) the plate or slab is composed of material which may be assumed to be homogeneous, isotropic, and elastic; (b) the plate is of a uniform thickness which is small as compared with its lateral dimensions; (c) the deflections of the loaded plate are small as compared with its thickness. The additional differential expressions relating the deflections to the boundary conditions, moments, and shears are perhaps

equally well known. (See, for instance, 1). They will therefore only be stated here, using the notation and sign convention shown in Figure 38.

Partial differential equation:

$$\frac{\partial^4 w}{\partial x^4} + 2 \frac{\partial^4 w}{\partial x^2 \partial y^2} + \frac{\partial^4 w}{\partial y^4} = \frac{p(x,y)}{D} \quad (1)$$

Fixed edge conditions:

$$w = 0 \quad (2.01)$$

$$\frac{\partial w}{\partial n} = 0 \quad (2.02)$$

Hinged edge conditions:

$$w = 0 \quad (3.01)$$

$$\frac{\partial^2 w}{\partial n^2} + \mu \frac{\partial^2 w}{\partial t^2} = 0 \quad (3.02)$$

Free edge conditions:

$$\frac{\partial^2 w}{\partial n^2} + \mu \frac{\partial^2 w}{\partial t^2} = 0 \quad (4.01)$$

$$\frac{\partial^3 w}{\partial n^3} + (2 - \mu) \frac{\partial^3 w}{\partial n \partial t^2} = 0 \quad (4.02)$$

Free corner conditions:

$$\frac{\partial^2 w}{\partial n^2} = 0 \text{ (both directions)} \quad (5.01)$$

$$\frac{\partial^3 w}{\partial n^3} + (2 - \mu) \frac{\partial^3 w}{\partial n \partial t^2} = 0 \text{ (both directions)} \quad (5.02)$$

$$\frac{\partial^2 w}{\partial n \partial t} = 0 \quad (5.03)$$

Bending moments:

$$M_x = D \left[\frac{\partial^2 w}{\partial x^2} + \mu \frac{\partial^2 w}{\partial y^2} \right] \quad (6.01)$$

$$M_y = D \left[\frac{\partial^2 w}{\partial y^2} + \mu \frac{\partial^2 w}{\partial x^2} \right] \quad (6.02)$$

Twisting moments:

$$M_{xy} = M_{yx} = D(1 - \mu) \frac{\partial^2 w}{\partial x \partial y} \quad (7)$$

Shears:

$$V_x = -D \left[\frac{\partial^3 w}{\partial x^3} + \frac{\partial^3 w}{\partial x \partial y^2} \right] \quad (8.01)$$

$$v_y = -D \left[\frac{\partial^3 w}{\partial y^3} + \frac{\partial^3 w}{\partial x^2 \partial y} \right] \quad \dots (8.02)$$

In the above expressions the partial derivatives with respect to n indicate rates of change in a direction normal to the edge, and those with respect to t indicate rates of change tangential to the edge.

A solution to any specific problem consists of determining a deflection surface which satisfies the basic equation (1), and the appropriate sets of boundary conditions (2.01) through (5.03). The moments and shears required for design purposes may then be computed from (6.01) through (8.02).

In general, it is difficult to obtain an analytical expression for a deflection surface which satisfies all of these conditions. If, however, an approximate solution is acceptable, it is always possible in analyzing a rectangular plate to determine a set of deflections for a finite number of discrete points such that approximate relations corresponding to (1) through (5.03) are satisfied. From these deflections it is possible to compute moments, reactions, and shears at the selected points, using relations similar to (6.01) through (8.02).

The approximate relations referred to above are obtained by replacing the partial derivatives by corresponding finite difference quotients. Such relations are simplest if the discrete points determined by values of the independent variables are equally spaced with respect to both variables. However, in this application it will be advantageous for the relations to be developed on the more general basis of having the equal spacing in one coordinate direction bear a given ratio to the spacing in the perpendicular direction.

Figure 38(a) represents a portion of the interior of a plate subdivided by grid lines into rectangular grid elements. The grid lines are spaced h units apart in the y direction and rh units apart in the x direction. The intersections of the grid lines will be referred to as grid points. Certain of these, lettered for identification, will be spoken of as active points, and the central point of the active group will be called the focal point. For simplicity in writing the equations, the identifying letters for each

active point will also be used to represent the value of the deflection, w , of the middle surface of the plate at that point. The double letters refer in every case to the deflection at the individual point so lettered; they do not indicate products of deflections at points designated by only one letter.

Based on the usual methods of finite differences¹⁰ the difference quotient relations required in this development can be written directly and are given below. All of the difference quotients are given with reference to the focal point, lettered Z .

$$\frac{\Delta w}{\Delta x} = \frac{1}{2rh} (E - W) \quad \dots (9.01)$$

$$\frac{\Delta^2 w}{\Delta x^2} = \frac{1}{r^2 h^2} (E - 2Z + W) \quad \dots (9.02)$$

$$\frac{\Delta^3 w}{\Delta x^3} = \frac{1}{2r^3 h^3} (EE - 2E + 2W - WW) \quad (9.03)$$

$$\frac{\Delta^4 w}{\Delta x^4} = \frac{1}{r^4 h^4} (EE - 4E + 6Z - 4W + WW) \quad \dots (9.04)$$

$$\frac{\Delta w}{\Delta y} = \frac{1}{2h} (N - S) \quad \dots (9.05)$$

$$\frac{\Delta^2 w}{\Delta y^2} = \frac{1}{h^2} (N - 2Z + S) \quad \dots (9.06)$$

$$\frac{\Delta^3 w}{\Delta y^3} = \frac{1}{2h^3} (NN - 2N + 2S - SS) \quad (9.07)$$

$$\frac{\Delta^4 w}{\Delta y^4} = \frac{1}{h^4} (NN - 4N + 6Z - 4S + SS) \quad \dots (9.08)$$

$$\frac{\Delta^2 w}{\Delta x \Delta y} = \frac{1}{4r h^2} (NE - NW + SW - SE) \quad (9.09)$$

$$\frac{\Delta^3 w}{\Delta x^2 \Delta y} = \frac{1}{2r^2 h^3} (NE - 2N + NW - SE + 2S - SW) \quad \dots (9.10)$$

$$\frac{\Delta^3 w}{\Delta x \Delta y^2} = \frac{1}{2r h^3} (NE - 2E + SE - NW + 2W - SW) \quad \dots (9.11)$$

$$\frac{\Delta^4 w}{\Delta x^2 \Delta y^2} = \frac{1}{r^2 h^4} (NE - 2E + SE - 2N + 4Z - 2S + NW - 2W + SW) \quad (9.12)$$

The approximate counterparts of the basic relations (1) through (8.02) may now be writ-

ten. For instance if $\nabla^4 w$ is used to represent the difference quotient equivalent to the left-hand member of equation (1), and the partial derivatives are replaced by their corresponding difference quotients, (9.04), (9.08), and (9.12), there results:

$$\nabla^4 w = \frac{1}{r^4 h^4} \left[EE + WW + r^4(NN + SS) + 2r^2 \right. \\ (NE + SE + SW + NW) - 4(1 + r^2) \\ (E + W) - 4r^2(1 + r^2)(N + S) \\ \left. + 2(3 + 4r^2 + 3r^4)Z \right] \dots (10)$$

This may be considered as an operator, and the portion within the brackets can be conveniently portrayed as an array of coefficients. This expression, multiplied by h^4 , is shown in array form at (a) of Figure 39. Each element of the array represents the coefficient of the deflection of one of the active grid points in a group similar to that shown at (a) of Figure 38. The location of the coefficients in the array is congruent to the physical locations of the points and the heavily outlined coefficient applies at the focal point--the point for which the relation is to be determined.

Since the solution deals with discrete points, the distributed load intensity p in the right-hand member of (1) is replaced by an average intensity P/rh^2 at each of the interior grid points. Here P represents a concentrated load whose magnitude at any grid point is a function of the distribution of p on the four adjoining grid elements. If each of these elements is considered as an infinitely rigid plate supported at its four corners, then the force P_Z , at the focal point, is equal in magnitude and opposite in direction to the sum of the reactions at all corners common to Z . This can be expressed mathematically as:

$$P_Z = P_{ZNE} + P_{ZSE} + P_{ZSW} + P_{ZNW} \dots (11)$$

in which P_{ZNE} represents the contribution from the grid element Z-N-NE-E and similarly for the other right-hand members. Thus it is seen that the concentrated loads P_Z are the static equivalent of p .

It can be shown, if p varies linearly--a usual condition for structures--and if this variation is constant over the four grid elements adjoining any focal point Z , that the magnitude of the statically equivalent average load is:

$$P_Z/rh^2 = (1/6)(p_N + p_E + p_S + p_W + 2p_Z), \dots (12)$$

where p_N represents the intensity of p at point N , etc.

The approximate counterpart of (1) may now be written:

$$\nabla^4 w = \frac{P_Z}{D rh^2} \dots (13)$$

Multiplying both sides of (13) by h^4 and replacing $\nabla^4 w$ by the deflections as given by (10) leads to:

$$\frac{1}{r^4} \left[EE + WW + r^4(NN + SS) + 2r^2(NE + SE + SW + NW) - 4(1 + r^2)(E + W) - 4r^2 \right. \\ (1 + r^2)(N + S) + 2(3 + 4r^2 + 3r^4)Z \left. \right] \\ = \frac{P_Z}{rh^2} \frac{h^4}{D} \dots (14)$$

This is the general load-deflection relation for an interior point. It is written at (a) of Figure 39 in the convenient array form previously described. This general form of the equations has been used for the special cases which include the boundary conditions and, in fact, for all of the relations connecting the deflections with load, moments, reactions, and shears. These load-deflection equations establish a linear relation between the load at the focal point and the unknown deflections of the plate at that and the other active grid points. It is these linear equations which are to be solved simultaneously to determine the approximate deflections of the plate at the grid points.

Equation (14) may be derived directly by a second method which considers equilibrium of certain elements of the plate. Referring to the subdivided grid of Figure 38(b), consider the rectangular element ne-se-sw-nw with center at Z . Equilibrium of forces normal to

the plate requires that

$$(v_{x_e} - v_{x_v})h + (v_{y_n} - v_{y_s})rh + P_z = 0 \dots (15)$$

For the similar element with center at e, equilibrium of moments about the center line ne-se requires that

$$(M_{x_E} - M_{x_Z})h + (M_{yx_{ne}} - M_{yx_{se}})rh + (v_{x_E} + v_{x_Z}) \frac{rh^2}{2} = 0.$$

However, if the elements are sufficiently small, $\frac{1}{2}(v_{x_E} + v_{x_Z})$ may be replaced with

$$v_{x_e} \text{ so that } (M_{x_E} - M_{x_Z})h + (M_{yx_{ne}} - M_{yx_{se}})rh + v_{x_e} rh^2 = 0 \dots (16.01)$$

In like manner for elements with centers at w, n, and s: $(M_{x_Z} - M_{x_W})h + (M_{yx_{nw}} - M_{yx_{sw}})rh + v_{x_w} rh^2 = 0, \dots (16.02)$

$$(M_{y_N} - M_{y_Z})rh + (M_{xy_{ne}} - M_{xy_{nw}})h + v_{y_n} rh^2 = 0, \dots (16.03)$$

$$(M_{y_Z} - M_{y_S})rh + (M_{xy_{se}} - M_{xy_{sw}})h + v_{y_s} rh^2 = 0. \dots (16.04)$$

If equations (15) and (16.01) through (16.04) are combined to eliminate the shears, noting at the same time that $M_{xy} = M_{yx}$, there results

$$\begin{aligned} & \frac{1}{r}(M_{x_E} - 2M_{x_Z} + M_{x_W}) + 2(M_{xy_{ne}} - M_{xy_{nw}} + M_{xy_{sw}} - M_{xy_{se}}) \\ & + r(M_{y_N} - 2M_{y_Z} + M_{y_S}) = P_z \dots (17) \end{aligned}$$

An approximation to each moment in terms of deflections is obtained if the partial differentials of the definitions (6.01), (6.02), and (7) are replaced by their proper difference quotients corresponding to (9.02), (9.06), and (9.09). For instance,

$$M_{x_Z} = \frac{D}{r^2 h^2} [E - 2Z + W + \mu r^2 (N - 2Z + S)], \dots (18)$$

and $M_{xy_{ne}}$

$$= \frac{D(1-\mu)}{rh^2} [NE - N + Z - E] \dots (19)$$

Substituting these and corresponding relations for the other moments into (17), and multiplying both sides by h^2/rD gives

$$\begin{aligned} & \frac{1}{r^4}(WW - 4W + 6Z - 4E + EE) \\ & + \frac{2}{r^2}(NW - 2N + NE - 2W + 4Z - 2E + SW - 2S + SE) \\ & + (NN - 4N + 6Z - 4S + SS) = \frac{P_z h^2}{rD}, \end{aligned}$$

which with some rearrangement, is the same as (14).

This second method is easily adapted to deriving expressions involving nonuniform spacings, moment-free boundaries, etc. It was applied to obtain all of the load-deflection arrays shown in Figures 39 through 59, which were required in the solution of the problems covered by this monograph.

Where boundary conditions involve a reaction, the load P may be replaced by the net load, $(P - R)$, which is the difference between load and reaction. Note that R represents a concentrated force whose positive direction is opposite to that of p . R_x and R_y , on the other hand, represent intensities of shearing reactions whose positive directions conform to v_x and v_y .

Relations connecting the deflections with moments and with shears are given in Figures 60 through 64. It should be noted that shears computed by finite difference methods are inherently less accurate than moments. This is because the shears are functions of odd numbered difference quotients which are determined by a grid spacing double the value found in the even numbered quotients which define the moments.

Application to Plate Fixed Along Three Edges and Free Along the Fourth

As an example of the use of this general method, its application to the problem of a plate fixed along three edges and free along the fourth is given below. The a/b ratio of

1/4 has been used to illustrate use of the 20 supplementary equations. Loads I, II, and IV only are included.

The plate is divided into grid elements and the grid points numbered systematically for identification. Layout of Plate, Figure 66, shows the method used in this case. Because of symmetry of the plate and loading about the line $x = a$, points which are symmetrical about this line will have equal deflections and are, therefore, numbered alike. This reduces considerably the number of unknown deflections to be determined.

With $r = 1/4$ and $\mu = 0.2$, the left-hand side of each of the load-deflection relations yields an array of numerical coefficients corresponding to the type of point it represents. These values have been computed for typical points and they are shown in Figure 65. They are used in writing the left-hand members of the simultaneous equations. Solution of these equations determines the deflections.

One equation must be written for each grid point having an unknown deflection. The equation corresponding to any point is formed as follows:

- Select the array of load-deflection coefficients having edge conditions and spacings which correspond to those of the given point.
- Orient the focal point of this array at the given point.
- Multiply the unknown which represents the deflection of each active grid point by the corresponding coefficient.
- Equate the sum of these products to the load term for the given point.

For example, for Point 45 the array at (b) of Figure 65 must be used in order that the free edges correspond properly. Then, following the procedure outlined above, the left-hand member of the equation for Point 45 is

$$+ 256w_{25} + 32w_{34} - 1088w_{35} + 28.8w_{36} \\ + w_{43} - 68w_{44} + (1669 + 256)w_{45}$$

$$- 59.6w_{46} + 32w_{54} - 1088w_{55} + 28.8w_{56}$$

Noting that $R_z = 0$ along the free edge it is seen that in this case the general expression for the right-hand terms is always $(P_z/rh^2)(h^4/D)$. Since these load terms are to be expressed as coefficients of ph^4/D , it remains to evaluate the P_z/rh^2 in terms of p for each point and each loading. At Point 45 the right-hand members for Loads I and IV may be obtained by direct application of (12). However, a discontinuity occurs in the magnitude of Load II within the grid elements adjoining Point 45. For this reason, the more general method expressed by (11) must be employed.

In particular for Load II, the elements 45-35-36-46 and 45-46-56-55 carry no load, and accordingly they make no contribution to P_{45} . The elements 45-44-34-35 and 45-55-54-44 each carry an equal portion of the uniform load. Under the assumptions leading to (11) it is found, by statics, that the contribution of each of these elements to P_{45} is $ph^2/144$. Hence, $P_{45} = ph^2/72$ and $P_{45}/rh^2 = p/18$.

The complete set of 30 equations and the right-hand (load) terms are shown as two matrices in Figure 66. Simultaneous solution of the equations establishes a set of deflections for each of the 30 grid points, corresponding to each load. These results are tabulated in the upper portion of Figure 67.

The 20 supplementary equations used to determine the deflections of the row of points at $y = \frac{1}{4}h$ are set up in a similar manner. Equations are written for each point of the 3-, 2-, 1-, and 7-rows (see Figure 68). However, in writing equations for the 3- and 2-rows use is made of the previously computed deflections for the 4- and 5-rows. In addition, the solution of the 20 equations gives new and improved values of deflections for the 3-, 2-, and 1-rows. For Point 42, for example, the array (f) of Figure 65 is used to conform with the spacing of the grid points involved. The equation for Load I is

$$- 28w_{21} + 210w_{22} + 10w_{23} + 176w_{31} \\ - 936w_{32} - 8w_{33} + \frac{64}{3}w_{47} - 364w_{41} \\ + \frac{5057}{3}w_{42} + 176w_{51} - 936w_{52} \\ - 8w_{53} = \frac{3}{4} \frac{ph^4}{D} - w_{44}$$

Substituting for Point 44, its deflection as determined from the 30 equations gives, for the right-hand member

$$(0.75 - 0.100572) \frac{ph^4}{D} = 0.649428 \frac{ph^4}{D}.$$

The complete set of 20 equations for Loads I, II, and IV is given in Figure 68. Solution of these gives the deflections shown on the lower portion of Figure 67. Where improved values of the deflection were obtained, the former ones have been discarded as indicated in the figure. Comparison of old and new values shows that they approach closely for the points where $y/b = 0.4$.

Having determined the deflections, reactions and moments may be computed by operating upon the deflections with the appropriate relations, typical samples of which are given in Figure 69. These numerical arrays were obtained similarly to those for the load-deflection relations, by inserting numerical values for r and μ in the proper general expressions of the referenced figures.

To illustrate the method of computation of reactions and moments, an example of each (Load I, $a/b = 1/4$) is given below. At Point 30, for instance, using array (f) of Figure 69, the reaction is:

$$R_{30} = P_{30} + \frac{D}{h^2} (-32w_{27} - 16w_{31} + 128w_{37} - 32w_{47}) \dots$$

Substituting numerical values for P_{30} and the various deflections, this becomes

$$\begin{aligned} R_{30} &= 0.03125 ph^2 \\ &+ \left(\frac{D}{h^2} \right) \left(\frac{ph^4}{D} \right) \left[- (32)(0.004944) \right. \\ &- (16)(0.021325) + (128)(0.007860) \\ &\left. - (32)(0.009833) \right] \\ &= (0.03125 + 0.192016) ph^2 \\ &= 0.223266 ph^2. \end{aligned}$$

This represents a concentrated force acting at Point 30. Assuming that it is uniformly distributed over a distance rh , it can be expressed as an average shearing reaction per unit length

$$R_{y_{30}} = R_{30}/rh = 0.893064 ph,$$

or in terms of b

$$R_{y_{30}} = 0.178613 pb,$$

which is in the units used in Figures 1 through 33.

Similarly, for example, the bending moment M_x at Point 23 is computed using array (g) of Figure 69. Thus

$$\begin{aligned} M_{x_{23}} &= \frac{D}{h^2} (16w_{13} + 0.2w_{22} \\ &- 32.4w_{23} + 0.2w_{24} + 16w_{33}). \end{aligned}$$


Again inserting numerical values

$$\begin{aligned} M_{x_{23}} &= \left(\frac{D}{h^2} \right) \left(\frac{ph^4}{D} \right) \left[(16)(0.015283) \right. \\ &+ (0.2)(0.029914) \\ &- (32.4)(0.043935) + (0.2)(0.046526) \\ &\left. + (16)(0.073156) \right] \\ &= 0.006818 ph^2 = 0.000273 pb^2. \end{aligned}$$


Upon completion of computation of the reactions, a partial check of the solution may be obtained from equilibrium considerations. For Load I, $a/b = 1/4$, the total load on one-half of the plate is $p(5h)(5h/4) = 6.25 ph^2$. The summation of the R/ph^2 column of Figure 70 should agree with this, and it is seen to be in error by something less than 0.015 percent.

LIST OF REFERENCES

1. Timoshenko, S., Theory of Plates and Shells, McGraw-Hill, New York, 1940.
2. Anonymous, "Rectangular Concrete Tanks," Concrete Information Bulletin No. ST63, Portland Cement Association, 1947.
3. Westergaard, H. M., and Slater, W. A., "Moments and Stresses in Slabs," Proceedings, American Concrete Institute, Vol. XVII, page 415, 1921.
4. Nielsen, N. J., Bestemmelse af Spaendinger i Plader, Jørgenson, Copenhagen, 1920.
5. Marcus, H., Die Theorie elastischer Gewebe, 2nd Edition, Julius Springer, Berlin, 1932.
6. Wise, J. A., "The Calculation of Flat Plates by the Elastic Web Method," Proceedings, American Concrete Institute, Vol. XXIV, page 408, 1928.
7. Holl, D. L., "Analysis of Plate Examples by Difference Methods and the Superposition Principle," Journal of Applied Mechanics, Vol. 58, page A-81, 1936.
8. Barton, M. V., Finite Difference Equations for the Analysis of Thin Rectangular Plates, University of Texas, 1948.
9. Jensen, V. P., "Analyses of Skew Slabs," Bulletin Series No. 332, University of Illinois, Engineering Experiment Station, 1941.
10. Scarborough, J. B., Numerical Mathematical Analysis, John Hopkins Press, Baltimore, 1950.

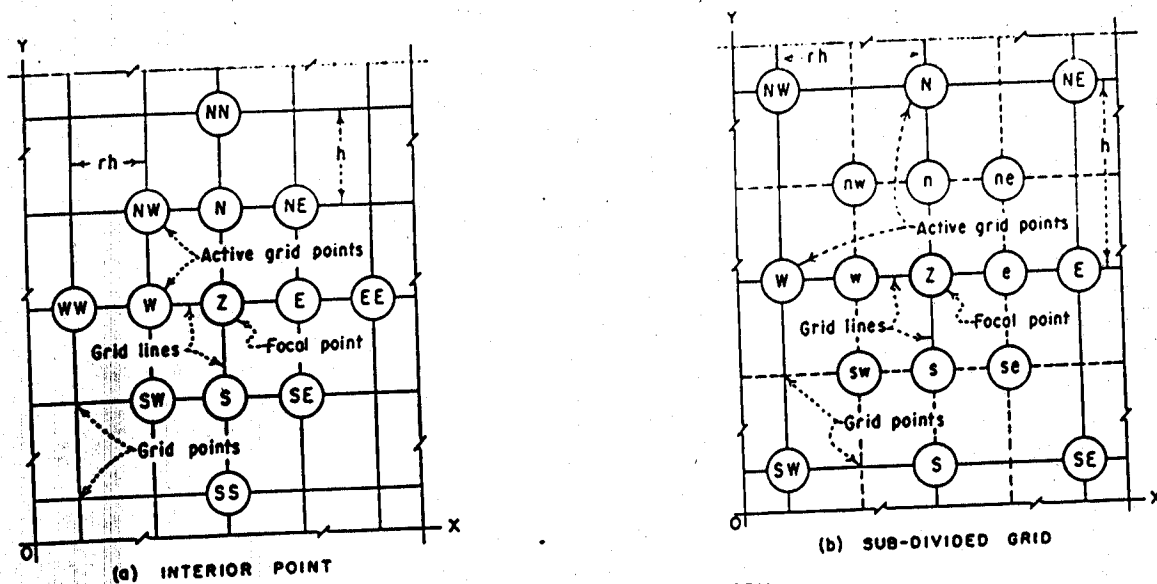

GRID POINT DESIGNATION SYSTEM

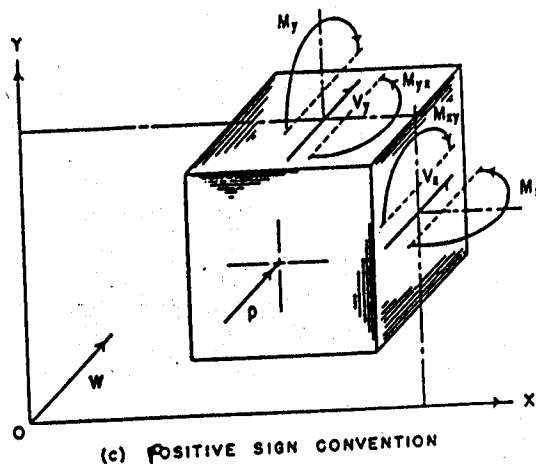

- p Intensity of pressure, normal to the plane of the plate.
- a, b Lateral dimensions of the plate.
- h Lateral dimension in the y direction of the grid elements of the plate.
- r Ratio of lateral dimensions of the grid elements.
- w Deflection of the middle surface of the plate, normal to the XOY plane.
- x, y Rectangular coordinates in the plane of the plate.
- $Z, N, E, \dots, NE, NN$ Designation of active grid points. Also used to represent the value of the deflection of the plate at the point so lettered.
- $n, e, s, \dots, sw, nw$ Designation of additional points on sub-divided grid.
- n, t Subscripts used to indicate directions normal and tangential to an edge.
- M_x, M_y Bending moment per unit length acting on planes perpendicular to the x and y axes respectively.
- M_{xy}, M_{yx} Twisting moment per unit length in planes perpendicular to the x and y axes respectively.
- V_x, V_y Shearing force per unit length acting normal to the plane of the plate, in planes normal to the x and y axes respectively.
- R_x, R_y Shearing reactions per unit length acting normal to the plane of the plate, in planes normal to the x and y axes respectively.
- P Concentrated load acting at a grid point; positive in the same direction as p .
- R Concentrated reaction acting at a supported grid point; positive direction opposite to that of p .
- E Young's modulus for the material of the plate.
- I Moment of inertia per unit length of a section of the plate.
- μ Poisson's ratio for the material of the plate.
- D Flexural rigidity per unit length of the plate; $D = EI/(1 - \mu^2)$.
- ∇^4 Difference quotient operator: $\nabla^4 w = \frac{\Delta^4 w}{\Delta x^4} + 2 \frac{\Delta^4 w}{\Delta x^2 \Delta y^2} + \frac{\Delta^4 w}{\Delta y^4}$.

NOTATION

FIGURE 38 - Grid point designation system and notation.

$$\frac{1}{r^4} \begin{array}{ccccc} & & +r^4 & & \\ & +2r^2 & -4r^2 - 4r^4 & +2r^2 & \\ +1 & -4 - 4r^2 & +6 + 8r^2 + 6r^4 & -4 - 4r^2 & +1 \\ & +2r^2 & -4r^2 - 4r^4 & +2r^2 & \\ & & +r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

(a) INTERIOR POINT

$$\frac{1}{r^4} \begin{array}{ccccc} & & +r^4 & & \\ & +2r^2 & -4r^2 - 4r^4 & +2r^2 & \\ +1 & -4 - 4r^2 & +6 + 8r^2 + 7r^4 & -4 - 4r^2 & +1 \\ & * & * & * & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

(b) POINT ADJACENT TO A FIXED X-EDGE

$$\frac{1}{r^4} \begin{array}{ccccc} & & +r^4 & & \\ * & -4r^2 - 4r^4 & +2r^2 & & \\ * & +7 + 8r^2 + 6r^4 & -4 - 4r^2 & +1 & \\ * & -4r^2 - 4r^4 & +2r^2 & & \\ & +r^4 & & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

(c) POINT ADJACENT TO A FIXED Y-EDGE

$$\frac{1}{r^4} \begin{array}{ccccc} & & +r^4 & & \\ * & -4r^2 - 4r^4 & +2r^2 & & \\ * & +7 + 8r^2 + 7r^4 & -4 - 4r^2 & +1 & \\ * & * & * & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

(d) POINT ADJACENT TO A FIXED CORNER

NOTES

Except where otherwise indicated horizontal spacing of grid points is rh units and vertical spacing h units.

An asterisk (*) indicates that no coefficient is required because the fixed-edge deflection of that point is zero.

An edge parallel to the X-Axis is designated as an X-Edge.

An edge parallel to the Y-Axis is designated as a Y-Edge.

A fixed edge is indicated thus: 

A moment-free edge is indicated thus: 

Any factor preceding an array of coefficients is a multiplier of each element of the array.

FIGURE 39 - Load-deflection relations, Sheet I.

		$+(2-\mu)r^2$	$-2(2-\mu)r^2-2r^4$	$+2(1-\mu)r^2$	
$\frac{1}{r^4}$	$+1$	$-4-4r^2$	$+5+8r^2+5r^4$	$-2-2(2-\mu)r^2$	
		$+2r^2$	$-4r^2-4r^4$	$+(2-\mu)r^2$	
			$+r^4$		

$$= \frac{P}{rh^2} \frac{h^4}{D}$$

(a) POINT ADJACENT TO A MOMENT-FREE CORNER

		$+(2-\mu)r^2$	$-2(2-\mu)r^2-2r^4$	$+(2-\mu)r^2$	
$\frac{1}{r^4}$	$+1$	$-4-4r^2$	$+6+8r^2+5r^4$	$-4-4r^2$	$+1$
		$+2r^2$	$-4r^2-4r^4$	$+2r^2$	
			$+r^4$		

$$= \frac{P}{rh^2} \frac{h^4}{D}$$

(b) POINT ADJACENT TO A MOMENT-FREE X-EDGE

			$+r^4$		
		$+2r^2$	$-4r^2-4r^4$	$+(2-\mu)r^2$	
$\frac{1}{r^4}$	$+1$	$-4-4r^2$	$+5+8r^2+6r^4$	$-2-2(2-\mu)r^2$	
		$+2r^2$	$-4r^2-4r^4$	$+(2-\mu)r^2$	
			$+r^4$		

$$= \frac{P}{rh^2} \frac{h^4}{D}$$

(c) POINT ADJACENT TO A MOMENT-FREE Y-EDGE

			$-2(2-\mu)r^2-2r^4$	$+(2-\mu)r^2$	
$\frac{1}{r^4}$	*		$+7+8r^2+5r^4$	$-4-4r^2$	$+1$
	*		$-4r^2-4r^4$	$+2r^2$	
			$+r^4$		

$$= \frac{P}{rh^2} \frac{h^4}{D}$$

(d) POINT ADJACENT TO A MOMENT-FREE X-EDGE AND A FIXED Y-EDGE

			$+r^4$		
		$+2r^2$	$-4r^2-4r^4$	$+(2-\mu)r^2$	
$\frac{1}{r^4}$	$+1$	$-4-4r^2$	$+5+8r^2+7r^4$	$-2-2(2-\mu)r^2$	
		*	*	*	

$$= \frac{P}{rh^2} \frac{h^4}{D}$$

(e) POINT ADJACENT TO A MOMENT-FREE Y-EDGE AND A FIXED X-EDGE

NOTE
For general notes see Figure 39.

FIGURE 40 - Load-deflection relations, Sheet II.

$$\frac{1}{r^4} \begin{array}{|c|c|c|c|c|} \hline +\frac{1}{2}(1-\mu^2) & -2(1-\mu^2)-2(1-\mu)r^2 & +\frac{3}{4}(1-\mu^2) & -2(1-\mu^2)-2(1-\mu)r^2 & +\frac{1}{2}(1-\mu^2) \\ \hline & +(2-\mu)r^2 & -2(2-\mu)r^2-2r^4 & & \\ \hline & & +r^4 & & \\ \hline \end{array} = \frac{(P-R)}{r h^2} \frac{h^4}{D}$$

(a) POINT ON A MOMENT-FREE X-EDGE

$$\frac{1}{r^4} \begin{array}{|c|c|c|c|} \hline & & +\frac{1}{2}(1-\mu^2)r^4 & \\ \hline & +(2-\mu)r^2 & -2(1-\mu)r^2-2(1-\mu^2)r^4 & \\ \hline +1 & -2-2(2-\mu)r^2 & +1+\frac{4}{3}(1-\mu)r^2 & \\ & & +\frac{3}{2}(1-\mu^2)r^4 & \\ \hline & +(2-\mu)r^2 & -2(1-\mu)r^2-2(1-\mu^2)r^4 & \\ \hline & & +\frac{1}{2}(1-\mu^2)r^4 & \\ \hline \end{array} = \frac{(P-R)}{r h^2} \frac{h^4}{D}$$

(b) POINT ON A MOMENT-FREE Y-EDGE

$$\frac{1}{r^4} \begin{array}{|c|c|c|c|} \hline +\frac{1}{2}(1-\mu^2) & -2(1-\mu^2)-2(1-\mu)r^2 & +\frac{3}{4}(1-\mu^2) & -(1-\mu^2)-2(1-\mu)r^2 \\ \hline & +(2-\mu)r^2 & -2(2-\mu)r^2-2r^4 & +(2-\mu)r^2 \\ \hline & & +r^4 & \\ \hline \end{array} = \frac{(P-R)}{r h^2} \frac{h^4}{D}$$

(c) POINT ON A MOMENT-FREE X-EDGE ADJACENT TO A MOMENT-FREE Y-EDGE

$$\frac{1}{r^4} \begin{array}{|c|c|c|c|} \hline & & +(2-\mu)r^2 & -2(1-\mu)r^2-(1-\mu^2)r^4 \\ \hline +1 & -2-2(2-\mu)r^2 & +1+\frac{4}{3}(1-\mu)r^2 & \\ & & +\frac{3}{2}(1-\mu^2)r^4 & \\ \hline & +(2-\mu)r^2 & -2(1-\mu)r^2-2(1-\mu^2)r^4 & \\ \hline & & +\frac{1}{2}(1-\mu^2)r^4 & \\ \hline \end{array} = \frac{(P-R)}{r h^2} \frac{h^4}{D}$$

(d) POINT ON A MOMENT-FREE Y-EDGE ADJACENT TO A MOMENT-FREE X-EDGE

$$\frac{1}{r^4} \begin{array}{|c|c|c|c|} \hline * & +\frac{1}{2}(1-\mu^2) & -2(1-\mu^2)-2(1-\mu)r^2 & +\frac{1}{2}(1-\mu^2) \\ \hline * & +\frac{4}{3}(1-\mu)r^2 & & \\ \hline & -2(2-\mu)r^2-2r^4 & +(2-\mu)r^2 & \\ \hline & +r^4 & & \\ \hline \end{array} = \frac{(P-R)}{r h^2} \frac{h^4}{D}$$

(e) POINT ON A MOMENT-FREE X-EDGE ADJACENT TO A FIXED Y-EDGE

$$\frac{1}{r^4} \begin{array}{|c|c|c|c|} \hline & & +\frac{1}{2}(1-\mu^2)r^4 & \\ \hline & +(2-\mu)r^2 & -2(1-\mu)r^2-2(1-\mu^2)r^4 & \\ \hline +1 & -2-2(2-\mu)r^2 & +1+\frac{4}{3}(1-\mu)r^2 & \\ & & +\frac{3}{2}(1-\mu^2)r^4 & \\ \hline & * & * & \\ \hline \end{array} = \frac{(P-R)}{r h^2} \frac{h^4}{D}$$

(f) POINT ON A MOMENT-FREE Y-EDGE ADJACENT TO A FIXED X-EDGE

NOTE

For general notes see Figure 39.

FIGURE 41 - Load-deflection relations, Sheet III.

$$\frac{1}{r^4} \begin{array}{|c|c|c|} \hline \frac{1}{2}(1-\mu^2) & -(1-\mu^2) - 2(1-\mu)r^2 & \frac{1}{2}(1-\mu^2) + 2(1-\mu)r^2 \\ \hline & +2(1-\mu)r^2 & -2(1-\mu)r^2 - (1-\mu^2)r^4 \\ \hline & & +\frac{1}{2}(1-\mu^2)r^4 \\ \hline \end{array} = \frac{(P-R)}{r h^2} \frac{h^4}{D}$$

(a) POINT ON A MOMENT-FREE CORNER

$$\frac{1}{r^4} \begin{array}{|c|c|c|} \hline * & & \\ \hline * & +2r^2 & \\ \hline * & * & * \\ \hline \end{array} = \frac{(P-R)}{r h^2} \frac{h^4}{D}$$

(b) POINT ON A FIXED CORNER

$$\frac{1}{r^4} \begin{array}{|c|c|c|c|c|} \hline & & +r^4 & & \\ \hline & +2r^2 & -4r^2 - 4r^4 & +2r^2 & \\ \hline * & * & * & * & * \\ \hline \end{array} = \frac{(P-R)}{r h^2} \frac{h^4}{D}$$

(c) POINT ON A FIXED X-EDGE

$$\frac{1}{r^4} \begin{array}{|c|c|c|} \hline * & & \\ \hline * & +2r^2 & \\ \hline * & -4 - 4r^2 & +1 \\ \hline * & +2r^2 & \\ \hline * & & \\ \hline \end{array} = \frac{(P-R)}{r h^2} \frac{h^4}{D}$$

(d) POINT ON A FIXED Y-EDGE

$$\frac{1}{r^4} \begin{array}{|c|c|c|c|} \hline & +r^4 & & \\ \hline * & -4r^2 - 4r^4 & +2r^2 & \\ \hline * & * & * & * \\ \hline \end{array} = \frac{(P-R)}{r h^2} \frac{h^4}{D}$$

(e) POINT ON A FIXED X-EDGE ADJACENT TO A FIXED CORNER

$$\frac{1}{r^4} \begin{array}{|c|c|c|} \hline * & & \\ \hline * & +2r^2 & \\ \hline * & -4 - 4r^2 & +1 \\ \hline * & * & \\ \hline \end{array} = \frac{(P-R)}{r h^2} \frac{h^4}{D}$$

(f) POINT ON A FIXED Y-EDGE ADJACENT TO A FIXED CORNER

$$\frac{1}{r^4} \begin{array}{|c|c|c|c|} \hline & +r^4 & & \\ \hline & +2r^2 & -4r^2 - 4r^4 & +2(1-\mu)r^2 \\ \hline * & * & * & * \\ \hline \end{array} = \frac{(P-R)}{r h^2} \frac{h^4}{D}$$

(g) POINT ON A FIXED X-EDGE ADJACENT TO A MOMENT-FREE Y-EDGE

$$\frac{1}{r^4} \begin{array}{|c|c|c|} \hline * & +2(1-\mu)r^2 & \\ \hline * & -4 - 4r^2 & +1 \\ \hline * & +2r^2 & \\ \hline * & & \\ \hline \end{array} = \frac{(P-R)}{r h^2} \frac{h^4}{D}$$

(h) POINT ON A FIXED Y-EDGE ADJACENT TO A MOMENT-FREE X-EDGE

$$\frac{1}{r^4} \begin{array}{|c|c|c|} \hline & +\frac{1}{2}(1-\mu^2)r^4 & \\ \hline & +2(1-\mu)r^2 & -2(1-\mu)r^2 \\ \hline * & * & * \\ \hline \end{array} = \frac{(P-R)}{r h^2} \frac{h^4}{D}$$

(i) POINT ON A FIXED X- MOMENT-FREE Y-CORNER

$$\frac{1}{r^4} \begin{array}{|c|c|c|} \hline * & -2(1-\mu^2)r^2 & +\frac{1}{2}(1-\mu^2)r^4 \\ \hline * & +2(1-\mu)r^2 & \\ \hline * & & \\ \hline \end{array} = \frac{(P-R)}{r h^2} \frac{h^4}{D}$$


(j) POINT ON A FIXED Y- MOMENT-FREE X-CORNER

NOTE
For general notes see Figure 39.


FIGURE 42 - Load-deflection relations, Sheet IV.




$$\frac{1}{r^4} \begin{array}{ccccc} & & +r^4 & & \\ & +2r^2 & -4r^2 - 4r^4 & +2r^2 & \\ +1 & -4 - 4r^2 & +6 + 8r^2 + \frac{19}{3}r^4 & -4 - 4r^2 & +1 \\ & +2r^2 & -4r^2 - 6r^4 & +2r^2 & \\ & & +\frac{8}{3}r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{\Delta}$$



(a) INTERIOR POINT




$$\frac{1}{r^4} \begin{array}{ccccc} & & +r^4 & & \\ & +2r^2 & -4r^2 - 4r^4 & + (2-\mu)r^2 & \\ +1 & -4 - 4r^2 & +5 + 8r^2 + \frac{19}{3}r^4 & -2 - 2(2-\mu)r^2 & \\ & +2r^2 & -4r^2 - 6r^4 & + (2-\mu)r^2 & \\ & & +\frac{8}{3}r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{\Delta}$$



(b) POINT ADJACENT TO A MOMENT-FREE Y-EDGE



$$\frac{1}{r^4} \begin{array}{ccccc} & & & & +\frac{1}{2}(1-\mu^2)r^4 \\ & & + (2-\mu)r^2 & -2(1-\mu)r^2 - 2(1-\mu^2)r^4 & \\ +1 & -2 - 2(2-\mu)r^2 & +1 + 4(1-\mu)r^2 + \frac{19}{6}(1-\mu^2)r^4 & & \\ & + (2-\mu)r^2 & -2(1-\mu)r^2 - 3(1-\mu^2)r^4 & & \\ & & +\frac{4}{3}(1-\mu^2)r^4 & & \end{array} = \frac{(P-R)}{rh^2} \frac{h^4}{\Delta}$$



(c) POINT ON A MOMENT-FREE Y-EDGE

NOTE
For general notes see
Figure 39.

FIGURE 43 - Load-deflection relations, vertical spacing:
3 at h; 1 at h/2, Sheet V.

$\frac{1}{r^4}$

					$+ r^4$					
$+\frac{5}{128}$	$-\frac{5}{32} + 2r^2$	$+\frac{15}{64} - 4r^2 - 6r^4$	$-\frac{5}{32} + 2r^2$	$+\frac{5}{128}$						
$+\frac{105}{128}$	$-\frac{105}{32} - 6r^2$	$+\frac{315}{64} + 12r^2 + 21r^4$	$-\frac{105}{32} - 6r^2$	$+\frac{105}{128}$						
$-\frac{7}{64}$	$+\frac{7}{16} + 4r^2$	$-\frac{21}{32} - 8r^2 - 24r^4$	$+\frac{7}{16} + 4r^2$	$-\frac{7}{64}$						
					$+ 8r^4$					

$= \frac{P}{rh^2} \frac{h^4}{D}$

$\leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow$

(a) INTERIOR POINT

$\frac{1}{r^4}$

				$+ r^4$				
$+\frac{5}{128}$	$-\frac{5}{32} + 2r^2$	$+\frac{29}{128} - 4r^2 - 6r^4$	$-\frac{5}{64} + (2-\mu)r^2$					
$+\frac{105}{128}$	$-\frac{105}{32} - 6r^2$	$+\frac{525}{128} + 12r^2 + 21r^4$	$-\frac{105}{64} - 3(2-\mu)r^2$					
$-\frac{7}{64}$	$+\frac{7}{16} + 4r^2$	$-\frac{35}{64} - 8r^2 - 24r^4$	$+\frac{7}{32} + 2(2-\mu)r^2$					
				$+ 8r^4$				

$= \frac{P}{rh^2} \frac{h^4}{D}$

$\leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow$

(b) POINT ADJACENT TO A MOMENT-FREE Y-EDGE

$\frac{1}{r^4}$

			$+\frac{1}{2}(1-\mu^2)r^4$			
$+\frac{5}{128}$	$-\frac{5}{64} + (2-\mu)r^2$	$+\frac{5}{128} - 2(1-\mu)r^2$	$-\frac{5}{64} + (2-\mu)r^2$			
$+\frac{105}{128}$	$-\frac{105}{64} - 3(2-\mu)r^2$	$+\frac{105}{128} + 6(1-\mu)r^2$	$-\frac{105}{64} - 3(2-\mu)r^2$			
$-\frac{7}{64}$	$+\frac{7}{32} + 2(2-\mu)r^2$	$-\frac{7}{64} - 4(1-\mu)r^2$	$+\frac{7}{32} + 2(2-\mu)r^2$			
			$+ 4(1-\mu^2)r^4$			


$= \frac{(P-R)}{rh^2} \frac{h^4}{D}$

$\leftarrow rh \rightarrow \leftarrow rh \rightarrow$

(c) POINT ON A MOMENT-FREE Y-EDGE

NOTE
For general notes see
Figure 39.


FIGURE 44 - Load-deflection relations, vertical spacing:
2 at h; 2 at h/2; Sheet VI.




$$\frac{1}{r^4}$$

		$+ r^4$		
$+\frac{5}{128}$	$-\frac{5}{32} + 2r^2$	$+\frac{15}{64} - 4r^2 - 6r^4$	$-\frac{5}{32} + 2r^2$	$+\frac{5}{128}$
$+\frac{105}{128}$	$-\frac{105}{32} - 6r^2$	$+\frac{315}{64} + 12r^2 + \frac{71}{3}r^4$	$-\frac{105}{32} - 6r^2$	$+\frac{105}{128}$
$-\frac{7}{64}$	$+\frac{7}{16} + 4r^2$	$-\frac{21}{32} - 8r^2 - 40r^4$	$+\frac{7}{16} + 4r^2$	$-\frac{7}{64}$
		$+\frac{64}{3}r^4$		

$$= \frac{P}{rh^2} \frac{h^4}{D}$$




(a) INTERIOR POINT



$$\frac{1}{r^4}$$

		$+ r^4$	
$+\frac{5}{128}$	$-\frac{5}{32} + 2r^2$	$+\frac{25}{128} - 4r^2 - 6r^4$	$-\frac{5}{64} + (2-\mu)r^2$
$+\frac{105}{128}$	$-\frac{105}{32} - 6r^2$	$+\frac{525}{128} + 12r^2 + \frac{71}{3}r^4$	$-\frac{105}{64} - 3(2-\mu)r^2$
$-\frac{7}{64}$	$+\frac{7}{16} + 4r^2$	$-\frac{35}{64} - 8r^2 - 40r^4$	$+\frac{7}{32} + 2(2-\mu)r^2$
		$+\frac{64}{3}r^4$	

$$= \frac{P}{rh^2} \frac{h^4}{D}$$




(b) POINT ADJACENT TO A MOMENT-FREE Y-EDGE



$$\frac{1}{r^4}$$

		$+\frac{1}{2}(1-\mu^2)r^4$
$+\frac{5}{128}$	$-\frac{5}{64} + (2-\mu)r^2$	$+\frac{5}{128} - 2(1-\mu)r^2 - 3(1-\mu^2)r^4$
$+\frac{105}{128}$	$-\frac{105}{64} - 3(2-\mu)r^2$	$+\frac{105}{128} + \frac{6(1-\mu)r^2}{6} + \frac{71}{6}(1-\mu^2)r^4$
$-\frac{7}{64}$	$+\frac{7}{32} + 2(2-\mu)r^2$	$-\frac{7}{64} - 4(1-\mu)r^2 - 20(1-\mu^2)r^4$
		$+\frac{32}{3}(1-\mu^2)r^4$

$$= \frac{(P-R)}{rh^2} \frac{h^4}{D}$$




(c) POINT ON A MOMENT-FREE Y-EDGE

NOTE

For general notes see Figure 39.

FIGURE 45 - Load-deflection relations, vertical spacing: 2 at h; 1 at h/2; 1 at h/4, Sheet VII.



$$\frac{1}{r^4} \begin{array}{ccccc} & & +\frac{8}{3}r^4 & & \\ & +4r^2 & -8r^2 - 24r^4 & +4r^2 & \\ +\frac{1}{2} & -2 - 8r^2 & +3 + 16r^2 + \frac{136}{3}r^4 & -2 - 8r^2 & +\frac{1}{2} \\ & +4r^2 & -8r^2 - 32r^4 & +4r^2 & \\ & & +8r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

|←rh→|←rh→|←rh→|←rh→|


(a) INTERIOR POINT



$$\frac{1}{r^4} \begin{array}{ccccc} & & +\frac{8}{3}r^4 & & \\ & +4r^2 & -8r^2 - 24r^4 & +2(2-\mu)r^2 & \\ +\frac{1}{2} & -2 - 8r^2 & +\frac{5}{2} + 16r^2 + \frac{136}{3}r^4 & -1 - 4(2-\mu)r^2 & \\ & +4r^2 & -8r^2 - 32r^4 & +2(2-\mu)r^2 & \\ & & +8r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

|←rh→|←rh→|←rh→|

(b) POINT ADJACENT TO A MOMENT-FREE Y-EDGE



$$\frac{1}{r^4} \begin{array}{ccccc} & & & & +\frac{4}{3}(1-\mu^2)r^4 \\ & +2(2-\mu)r^2 & -4(1-\mu)r^2 - 12(1-\mu^2)r^4 & & \\ +\frac{1}{2} & -1 - 4(2-\mu)r^2 & +\frac{1}{2} + 8(1-\mu)r^2 + \frac{68}{3}(1-\mu^2)r^4 & & \\ & +2(2-\mu)r^2 & -4(1-\mu)r^2 - 16(1-\mu^2)r^4 & & \\ & & +4(1-\mu^2)r^4 & & \end{array} = \frac{(P-R)}{rh^2} \frac{h^4}{D}$$

|←rh→|←rh→|

(c) POINT ON A MOMENT-FREE Y-EDGE

NOTE
For general notes see
Figure 39.


FIGURE 46 - Load-deflection relations, vertical spacing:
1 at h; 3 at h/2, Sheet VIII.



$$\frac{1}{r^4} \begin{array}{ccccc} & & + \frac{8}{3} r^4 & & \\ + \frac{5}{256} & - \frac{5}{64} + 4r^2 & + \frac{15}{128} - 8r^2 - 40r^4 & - \frac{5}{64} + 4r^2 & + \frac{5}{256} \\ + \frac{105}{256} & - \frac{105}{64} - 12r^2 & + \frac{315}{128} + 24r^2 + \frac{496}{3} r^4 & - \frac{105}{64} - 12r^2 & + \frac{105}{256} \\ - \frac{7}{128} & + \frac{7}{32} + 8r^2 & - \frac{21}{64} - 16r^2 - 192r^4 & + \frac{7}{32} + 8r^2 & - \frac{7}{128} \\ & & + 64r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

|-----rh-----|-----rh-----|-----rh-----|-----rh-----|


(a) INTERIOR POINT



$$\frac{1}{r^4} \begin{array}{cccc} & & + \frac{8}{3} r^4 & \\ + \frac{5}{256} & - \frac{5}{64} + 4r^2 & + \frac{25}{256} - 8r^2 - 40r^4 & - \frac{5}{128} + 2(2-\mu)r^2 \\ + \frac{105}{256} & - \frac{105}{64} - 12r^2 & + \frac{525}{256} + 24r^2 + \frac{496}{3} r^4 & - \frac{105}{128} - 6(2-\mu)r^2 \\ - \frac{7}{128} & + \frac{7}{32} + 8r^2 & - \frac{35}{128} - 16r^2 - 192r^4 & + \frac{7}{64} + 4(2-\mu)r^2 \\ & & + 64r^4 & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

|-----rh-----|-----rh-----|-----rh-----|

(b) POINT ADJACENT TO A MOMENT-FREE Y-EDGE




$$\frac{1}{r^4} \begin{array}{ccc} & & + \frac{4}{3}(1-\mu^2)r^4 \\ + \frac{5}{256} & - \frac{5}{128} + 2(2-\mu)r^2 & + \frac{5}{256} - 4(1-\mu)r^2 - 20(1-\mu^2)r^4 \\ + \frac{105}{256} & - \frac{105}{128} - 6(2-\mu)r^2 & + \frac{105}{256} + \frac{12(1-\mu)r^2}{248} + \frac{248}{3}(1-\mu^2)r^4 \\ - \frac{7}{128} & + \frac{7}{64} + 4(2-\mu)r^2 & - \frac{7}{128} - 8(1-\mu)r^2 - 96(1-\mu^2)r^4 \\ & & + 32(1-\mu^2)r^4 \end{array} = \frac{(P-R)}{rh^2} \frac{h^4}{D}$$

|-----rh-----|-----rh-----|

(c) POINT ON A MOMENT-FREE Y-EDGE

NOTE
For general notes see
Figure 39.


FIGURE 47 - Load-deflection relations, vertical spacing:
1 at h; 1 at h/2; 2 at h/4, Sheet IX.



$$\frac{1}{r^4} \begin{array}{ccccc} & & + \frac{8}{3} r^4 & & \\ + \frac{5}{256} & - \frac{5}{64} + 4r^2 & + \frac{15}{128} - 8r^2 - 40r^4 & - \frac{5}{64} + 4r^2 & + \frac{5}{256} \\ + \frac{105}{256} & - \frac{105}{64} - 12r^2 & + \frac{315}{128} + 24r^2 + \frac{560}{3} r^4 & - \frac{105}{64} - 12r^2 & + \frac{105}{256} \\ - \frac{7}{128} & + \frac{7}{32} + 8r^2 & - \frac{21}{64} - 16r^2 - 320r^4 & + \frac{7}{32} + 8r^2 & - \frac{7}{128} \\ & & + \frac{512}{3} r^4 & & \end{array} = \frac{p}{rh^2} \frac{h^4}{D}$$

|-----rh-----|-----rh-----|-----rh-----|-----rh-----|


(a) INTERIOR POINT



$$\frac{1}{r^4} \begin{array}{ccccc} & & + \frac{8}{3} r^4 & & \\ + \frac{5}{256} & - \frac{5}{64} + 4r^2 & + \frac{25}{256} - 8r^2 - 40r^4 & - \frac{5}{128} + 2(2-\mu)r^2 & \\ + \frac{105}{256} & - \frac{105}{64} - 12r^2 & + \frac{325}{256} + 24r^2 + \frac{560}{3} r^4 & - \frac{105}{128} - 6(2-\mu)r^2 & \\ - \frac{7}{128} & + \frac{7}{32} + 8r^2 & - \frac{35}{128} - 16r^2 - 320r^4 & + \frac{7}{64} + 4(2-\mu)r^2 & \\ & & + \frac{512}{3} r^4 & & \end{array} = \frac{p}{rh^2} \frac{h^4}{D}$$

|-----rh-----|-----rh-----|-----rh-----|-----rh-----|

(b) POINT ADJACENT TO A MOMENT-FREE Y-EDGE




$$\frac{1}{r^4} \begin{array}{ccccc} & & + \frac{4}{3} (1-\mu^2) r^4 & & \\ + \frac{5}{256} & - \frac{5}{128} + 2(2-\mu)r^2 & + \frac{5}{256} - 4(1-\mu)r^2 - 20(1-\mu^2)r^4 & & \\ + \frac{105}{256} & - \frac{105}{128} - 6(2-\mu)r^2 & + \frac{105}{256} + \frac{12(1-\mu)r^2}{3} + \frac{280}{3}(1-\mu^2)r^4 & & \\ - \frac{7}{128} & + \frac{7}{64} + 4(2-\mu)r^2 & - \frac{7}{128} - 8(1-\mu)r^2 - 160(1-\mu^2)r^4 & & \\ & & + \frac{256}{3} (1-\mu^2) r^4 & & \end{array} = \frac{(p-R)}{rh^2} \frac{h^4}{D}$$

|-----rh-----|-----rh-----|-----rh-----|-----rh-----|


(c) POINT ON A MOMENT-FREE Y-EDGE

NOTE
For general notes see
Figure 39.


FIGURE 48 - Load-deflection relations, vertical spacing:
1 each at h , $h/2$, $h/4$, and $h/8$, Sheet X.

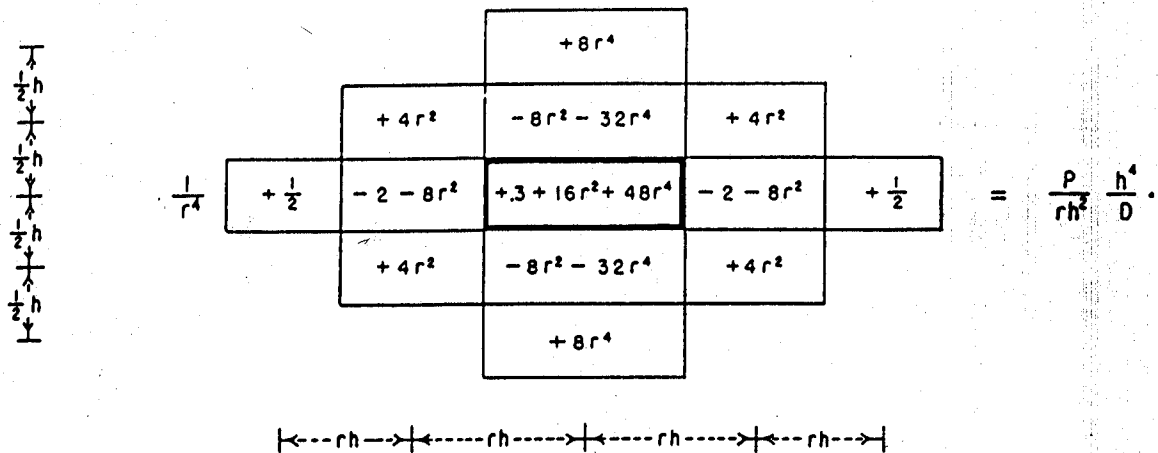

(a) INTERIOR POINT

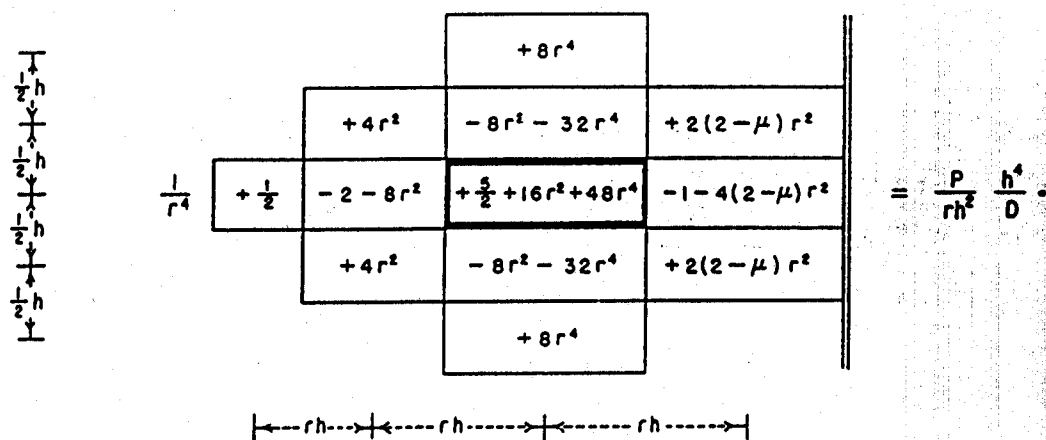

(b) POINT ADJACENT TO A MOMENT-FREE Y-EDGE

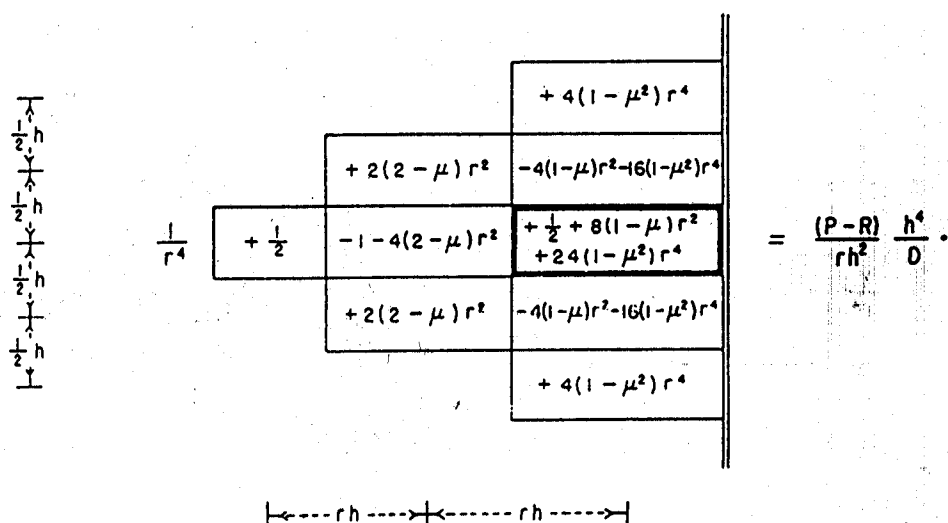

(c) POINT ON A MOMENT-FREE Y-EDGE.

NOTE
For general notes see
Figure 39.

FIGURE 49 - Load-deflection relations, vertical spacing:
4 at $h/2$, Sheet XI.

$$\frac{1}{r^4} \begin{array}{ccccc} & & +\frac{64}{3}r^4 & & \\ & +8r^2 & -16r^2 - 192r^4 & +8r^2 & \\ +\frac{1}{4} & -1 - 16r^2 & +\frac{3}{2} + 32r^2 + \frac{1088}{3}r^4 & -1 - 16r^2 & +\frac{1}{4} \\ & +8r^2 & -16r^2 - 256r^4 & +8r^2 & \\ & & +64r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

|←rh→|←rh→|←rh→|←rh→|

(a) INTERIOR POINT

$$\frac{1}{r^4} \begin{array}{ccccc} & & +\frac{64}{3}r^4 & & \\ & +8r^2 & -16r^2 - 192r^4 & +4(2-\mu)r^2 & \\ +\frac{1}{4} & -1 - 16r^2 & +\frac{5}{4} + 32r^2 + \frac{1088}{3}r^4 & -\frac{1}{2} - 8(2-\mu)r^2 & \\ & +8r^2 & -16r^2 - 256r^4 & +4(2-\mu)r^2 & \\ & & +64r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

|←rh→|←rh→|←rh→|←rh→|

(b) POINT ADJACENT TO A MOMENT-FREE Y-EDGE

$$\frac{1}{r^4} \begin{array}{ccccc} & & +\frac{32}{3}(1-\mu^2)r^4 & & \\ & +4(2-\mu)r^2 & -8(1-\mu)r^2 - 96(1-\mu^2)r^4 & & \\ +\frac{1}{4} & -\frac{1}{2} - 8(2-\mu)r^2 & +\frac{1}{4} + \frac{16(1-\mu)r^2}{3} + \frac{544}{3}(1-\mu^2)r^4 & & \\ & +4(2-\mu)r^2 & -8(1-\mu)r^2 - 128(1-\mu^2)r^4 & & \\ & & +32(1-\mu^2)r^4 & & \end{array} = \frac{(P-R)}{rh^2} \frac{h^4}{D}$$

|←rh→|←rh→|←rh→|←rh→|

(c) POINT ON A MOMENT-FREE Y-EDGE

NOTE
For general notes see
Figure 39.

FIGURE 50 - Load-deflection relations, vertical spacing:
1 at $h/2$; 3 at $h/4$, Sheet XII.

$\frac{1}{r^4}$

$\frac{1}{2}h$

$\frac{1}{4}h$

$\frac{1}{8}h$

$\frac{1}{8}h$

$\frac{1}{8}h$

$\frac{1}{8}h$

$\frac{1}{4}h$

$\frac{1}{2}h$

		$+\frac{64}{3}r^4$			
$+\frac{5}{512}$	$-\frac{5}{128} + 8r^2$	$+\frac{15}{256} - 16r^2 - 320r^4$	$-\frac{5}{128} + 8r^2$	$+\frac{5}{512}$	
$+\frac{105}{512}$	$-\frac{105}{128} - 24r^2$	$+\frac{315}{256} + 48r^2 + \frac{3968}{3}r^4$	$-\frac{105}{128} - 24r^2$	$+\frac{105}{512}$	
$-\frac{7}{256}$	$+\frac{7}{64} + 16r^2$	$-\frac{21}{128} - 32r^2 - 1536r^4$	$+\frac{7}{64} + 16r^2$	$-\frac{7}{256}$	
		$+512r^4$			

$\leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow$

$= \frac{P}{rh^2} \frac{h^4}{D}$

(a) INTERIOR POINT

$\frac{1}{r^4}$

$\frac{1}{2}h$

$\frac{1}{4}h$

$\frac{1}{8}h$

$\frac{1}{8}h$

$\frac{1}{8}h$

$\frac{1}{8}h$

$\frac{1}{4}h$

$\frac{1}{2}h$

		$+\frac{64}{3}r^4$			
$+\frac{5}{512}$	$-\frac{5}{128} + 8r^2$	$+\frac{25}{512} - 16r^2 - 320r^4$	$-\frac{5}{256} + 4(2-\mu)r^2$		
$+\frac{105}{512}$	$-\frac{105}{128} - 24r^2$	$+\frac{325}{512} + 48r^2 + \frac{3968}{3}r^4$	$-\frac{105}{256} - 12(2-\mu)r^2$		
$-\frac{7}{256}$	$+\frac{7}{64} + 16r^2$	$-\frac{35}{256} - 32r^2 - 1536r^4$	$+\frac{7}{128} + 8(2-\mu)r^2$		
		$+512r^4$			

$\leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow$

$= \frac{P}{rh^2} \frac{h^4}{D}$

(b) POINT ADJACENT TO A MOMENT-FREE Y-EDGE

$\frac{1}{r^4}$

$\frac{1}{2}h$

$\frac{1}{4}h$

$\frac{1}{8}h$

$\frac{1}{8}h$

$\frac{1}{8}h$

$\frac{1}{8}h$

$\frac{1}{4}h$

$\frac{1}{2}h$

		$+\frac{32}{3}(1-\mu^2)r^4$			
$+\frac{5}{512}$	$-\frac{5}{256} + 4(2-\mu)r^2$	$+\frac{5}{512} - 8(1-\mu)r^2 - 160(1-\mu^2)r^4$	$+\frac{105}{512} + 24(1-\mu)r^2 + \frac{1984}{3}(1-\mu^2)r^4$		
$+\frac{105}{512}$	$-\frac{105}{256} - 12(2-\mu)r^2$	$+\frac{105}{512} + 24(1-\mu)r^2 + \frac{1984}{3}(1-\mu^2)r^4$	$+\frac{105}{512} + 24(1-\mu)r^2 + \frac{1984}{3}(1-\mu^2)r^4$		
$-\frac{7}{256}$	$+\frac{7}{128} + 8(2-\mu)r^2$	$-\frac{7}{256} - 16(1-\mu)r^2 - 768(1-\mu^2)r^4$	$-\frac{7}{256} - 16(1-\mu)r^2 - 768(1-\mu^2)r^4$		
		$+256(1-\mu^2)r^4$			

$\leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow$

$= \frac{(P-R)}{rh^2} \frac{h^4}{D}$

(c) POINT ON A MOMENT-FREE Y-EDGE

NOTE
For general notes see
Figure 39.

FIGURE 51 - Load-deflection relations, vertical spacing:
1 at $h/2$; 1 at $h/4$; 2 at $h/8$, Sheet XIII.

66

$$\frac{1}{r^4} \begin{array}{ccccc} & & +64r^4 & & \\ & +8r^2 & -16r^2 - 256r^4 & +8r^2 & \\ +\frac{1}{4} & -1 - 16r^2 & +\frac{3}{2} + 32r^2 + 384r^4 & -1 - 16r^2 & +\frac{1}{4} \\ & +8r^2 & -16r^2 - 256r^4 & +8r^2 & \\ & & +64r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$


←-rh-→←-rh-→←-rh-→←-rh-→

(a) INTERIOR POINT

$$\frac{1}{r^4} \begin{array}{ccccc} & & +64r^4 & & \\ & +8r^2 & -16r^2 - 256r^4 & +4(2-\mu)r^2 & \\ +\frac{1}{4} & -1 - 16r^2 & +\frac{3}{2} + 32r^2 + 384r^4 & -\frac{1}{2} - 8(2-\mu)r^2 & \\ & +8r^2 & -16r^2 - 256r^4 & +4(2-\mu)r^2 & \\ & & +64r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

←-rh-→←-rh-→←-rh-→

(b) POINT ADJACENT TO A MOMENT-FREE Y-EDGE

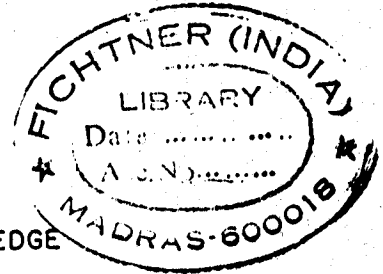


$$\frac{1}{r^4} \begin{array}{ccccc} & & & & +32(1-\mu^2)r^4 \\ & +4(2-\mu)r^2 & -8(1-\mu)r^2 - 128(1-\mu^2)r^4 & & \\ +\frac{1}{4} & -\frac{1}{2} - 8(2-\mu)r^2 & +\frac{1}{4} + 16(1-\mu)r^2 + 192(1-\mu^2)r^4 & & \\ & +4(2-\mu)r^2 & -8(1-\mu)r^2 - 128(1-\mu^2)r^4 & & \\ & & +32(1-\mu^2)r^4 & & \end{array} = \frac{(P-R)}{rh^2} \frac{h^4}{D}$$

←-rh-→←-rh-→

(c) POINT ON A MOMENT-FREE Y-EDGE

NOTE
For general notes see
Figure 39.

FIGURE 52 - Load-deflection relations, vertical spacing:
4 at $h/4$, Sheet XIV.



$$\frac{1}{r^4} \begin{array}{ccccc} & & + \frac{512}{3} r^4 & & \\ & + 16r^2 & - 32r^2 - 1536r^4 & + 16r^2 & \\ + \frac{1}{8} & - \frac{1}{2} - 32r^2 & + \frac{3}{4} + 64r^2 + \frac{8704}{3} r^4 & - \frac{1}{2} - 32r^2 & + \frac{1}{8} \\ & + 16r^2 & - 32r^2 - 2048r^4 & + 16r^2 & \\ & & + 512r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{\Delta}$$

|---rh---| |---rh---| |---rh---| |---rh---|


(a) INTERIOR POINT



$$\frac{1}{r^4} \begin{array}{ccccc} & & + \frac{512}{3} r^4 & & \\ & + 16r^2 & - 32r^2 - 1536r^4 & + 8(2-\mu)r^2 & \\ + \frac{1}{8} & - \frac{1}{2} - 32r^2 & + \frac{5}{8} + 64r^2 + \frac{8704}{3} r^4 & - \frac{1}{4} - 16(2-\mu)r^2 & \\ & + 16r^2 & - 32r^2 - 2048r^4 & + 8(2-\mu)r^2 & \\ & & + 512r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{\Delta}$$

|---rh---| |---rh---| |---rh---|

(b) POINT ADJACENT TO A MOMENT-FREE Y-EDGE



$$\frac{1}{r^4} \begin{array}{ccccc} & & + \frac{256}{3} (1-\mu^2) r^4 & & \\ & + 8(2-\mu)r^2 & - 16(1-\mu)r^2 - 768(1-\mu^2)r^4 & & \\ + \frac{1}{8} & - \frac{1}{4} - 16(2-\mu)r^2 & + \frac{1}{8} + \frac{32(1-\mu)r^2}{3} + \frac{4352}{3} (1-\mu^2) r^4 & & \\ & + 8(2-\mu)r^2 & - 16(1-\mu)r^2 - 1024(1-\mu^2)r^4 & & \\ & & + 256(1-\mu^2) r^4 & & \end{array} = \frac{(P-R)}{rh^2} \frac{h^4}{\Delta}$$

|---rh---| |---rh---|

(c) POINT ON A MOMENT-FREE Y-EDGE

NOTE
For general notes see
Figure 39.

FIGURE 53 - Load-deflection relations, vertical spacing:
1 at h/4; 3 at h/8, Sheet XV.

$$\frac{1}{r^4} \begin{array}{ccccc} & & +512r^4 & & \\ & +16r^2 & -32r^2 - 2048r^4 & +16r^2 & \\ +\frac{1}{8} & -\frac{1}{2} - 32r^2 & +\frac{3}{4} + 64r^2 + 3072r^4 & -\frac{1}{2} - 32r^2 & +\frac{1}{8} \\ & +16r^2 & -32r^2 - 2048r^4 & +16r^2 & \\ & & +512r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

←---rh---→←---rh---→←---rh---→←---rh---→

(a) INTERIOR POINT

$$\frac{1}{r^4} \begin{array}{ccccc} & & +512r^4 & & \\ & +16r^2 & -32r^2 - 2048r^4 & +8(2-\mu)r^2 & \\ +\frac{1}{8} & -\frac{1}{2} - 32r^2 & +\frac{5}{8} + 64r^2 + 3072r^4 & -\frac{1}{4} - 16(2-\mu)r^2 & \\ & +16r^2 & -32r^2 - 2048r^4 & +8(2-\mu)r^2 & \\ & & +512r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

←---rh---→←---rh---→←---rh---→

(b) POINT ADJACENT TO A MOMENT-FREE Y-EDGE


$$\frac{1}{r^4} \begin{array}{ccccc} & & +256(1-\mu^2)r^4 & & \\ & +8(2-\mu)r^2 & -16(1-\mu)r^2 - 1024(1-\mu^2)r^4 & & \\ +\frac{1}{8} & -\frac{1}{4} - 16(2-\mu)r^2 & +\frac{1}{8} + 32(1-\mu)r^2 & & \\ & +8(2-\mu)r^2 & -16(1-\mu)r^2 - 1024(1-\mu^2)r^4 & & \\ & & +256(1-\mu^2)r^4 & & \end{array} = \frac{(P-R)}{rh^2} \frac{h^4}{D}$$

←---rh---→←---rh---→

(c) POINT ON A MOMENT-FREE Y-EDGE


NOTE
For general notes see
Figure 39.

FIGURE 54 - Load-deflection relations, vertical spacing:
4 at $h/8$, Sheet XVI.




$$\frac{1}{r^4} \begin{array}{ccccc} & & +4r^4 & & \\ & +8r^2 & -16r^2 - 16r^4 & +8r^2 & \\ +4 & -16 - 16r^2 & +24 + 32r^2 + 24r^4 & -16 - 16r^2 & +4 \\ & +8r^2 & -16r^2 - 16r^4 & +8r^2 & \\ & & +4r^4 & & \end{array} = \frac{(P-R)}{rh^2} \frac{h^4}{D}$$

$\leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow$




$$\frac{1}{r^4} \begin{array}{ccccc} & & +\frac{4}{3}r^4 & & \\ & +8r^2 & -16r^2 - 12r^4 & +8r^2 & \\ +4 & -16 - 16r^2 & +24 + 32r^2 + \frac{64}{3}r^4 & -16 - 16r^2 & +4 \\ & +8r^2 & -16r^2 - 16r^4 & +8r^2 & \\ & & +4r^4 & & \end{array} = \frac{(P-R)}{rh^2} \frac{h^4}{D}$$

$\leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow$




$$\frac{1}{r^4} \begin{array}{ccccc} & & +\frac{1}{2}r^4 & & \\ & +4r^2 & -8r^2 - 3r^4 & +4r^2 & \\ +6 & -24 - 12r^2 & +36 + 24r^2 + \frac{21}{2}r^4 & -24 - 12r^2 & +6 \\ & +8r^2 & -16r^2 - 12r^4 & +8r^2 & \\ & & +4r^4 & & \end{array} = \frac{(P-R)}{rh^2} \frac{h^4}{D}$$

$\leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow$



$$\frac{1}{r^4} \begin{array}{ccccc} & & +\frac{1}{2}r^4 & & \\ & +4r^2 & -8r^2 - 2r^4 & +4r^2 & \\ +8 & -32 - 8r^2 & +48 + 16r^2 + \frac{19}{6}r^4 & -32 - 8r^2 & +8 \\ & +4r^2 & -8r^2 - 3r^4 & +4r^2 & \\ & & +\frac{4}{3}r^4 & & \end{array} = \frac{(P-R)}{rh^2} \frac{h^4}{D}$$

$\leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow$



$$\frac{1}{r^4} \begin{array}{ccccc} & & +\frac{1}{2}r^4 & & \\ & +4r^2 & -8r^2 - 2r^4 & +4r^2 & \\ +8 & -32 - 8r^2 & +48 + 16r^2 + 3r^4 & -32 - 8r^2 & +8 \\ & +4r^2 & -8r^2 - 2r^4 & +4r^2 & \\ & & +\frac{1}{2}r^4 & & \end{array} = \frac{(P-R)}{rh^2} \frac{h^4}{D}$$

$\leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow$

NOTE
For general notes see Figure 39.

FIGURE 55 - Load-deflection relations, horizontal spacing: 4 at $rh/2$, Sheet XVII.

Diagram showing a cross-section of a beam with a central vertical axis and horizontal spacing. The vertical axis is divided into segments of $\frac{1}{2}h$. The horizontal axis is divided into segments of $\frac{1}{2}rh$ and rh .

		$+8r^2$	$-16r^2 - 16r^4$	$+8r^2$	
	$+4$	$-16 - 16r^2$	$+\frac{68}{3} + 32r^2 + 24r^4$	$-12 - 16r^2$	$+\frac{4}{3}$
		$+8r^2$	$-16r^2 - 16r^4$	$+8r^2$	
			$+4r^4$		

$$= \frac{(P-R)}{rh^2} \frac{h^4}{D}$$

Diagram showing a cross-section of a beam with a central vertical axis and horizontal spacing. The vertical axis is divided into segments of $\frac{1}{2}h$. The horizontal axis is divided into segments of $\frac{1}{2}rh$ and rh .

Diagram showing a cross-section of a beam with a central vertical axis and horizontal spacing. The vertical axis is divided into segments of $\frac{1}{2}h$. The horizontal axis is divided into segments of $\frac{1}{2}rh$ and rh .

			$+\frac{4}{3}r^4$		
		$+8r^2$	$-16r^2 - 12r^4$	$+8r^2$	
	$+4$	$-16 - 16r^2$	$+\frac{68}{3} + 32r^2 + \frac{68}{3}r^4$	$-12 - 16r^2$	$+\frac{4}{3}$
		$+8r^2$	$-16r^2 - 16r^4$	$+8r^2$	
			$+4r^4$		

$$= \frac{P}{rh^2} \frac{h^4}{D}$$

Diagram showing a cross-section of a beam with a central vertical axis and horizontal spacing. The vertical axis is divided into segments of $\frac{1}{2}h$. The horizontal axis is divided into segments of $\frac{1}{2}rh$ and rh .

Diagram showing a cross-section of a beam with a central vertical axis and horizontal spacing. The vertical axis is divided into segments of $\frac{1}{2}h$. The horizontal axis is divided into segments of $\frac{1}{2}rh$ and rh .

			$+\frac{1}{2}r^4$		
		$+4r^2$	$-8r^2 - 3r^4$	$+4r^2$	
	$+6$	$-24 - 12r^2$	$+34 + 24r^2 + \frac{21}{2}r^4$	$-18 - 12r^2$	$+2$
		$+8r^2$	$-16r^2 - 12r^4$	$+8r^2$	
			$+4r^4$		

$$= \frac{P}{rh^2} \frac{h^4}{D}$$

Diagram showing a cross-section of a beam with a central vertical axis and horizontal spacing. The vertical axis is divided into segments of $\frac{1}{2}h$. The horizontal axis is divided into segments of $\frac{1}{2}rh$ and rh .

Diagram showing a cross-section of a beam with a central vertical axis and horizontal spacing. The vertical axis is divided into segments of $\frac{1}{2}h$. The horizontal axis is divided into segments of $\frac{1}{2}rh$ and rh .

			$+\frac{1}{2}r^4$		
		$+4r^2$	$-8r^2 - 2r^4$	$+4r^2$	
	$+8$	$-32 - 8r^2$	$+\frac{136}{3} + 16r^2 + \frac{19}{6}r^4$	$-24 - 8r^2$	$+\frac{8}{3}$
		$+4r^2$	$-8r^2 - 3r^4$	$+4r^2$	
			$+\frac{4}{3}r^4$		

$$= \frac{P}{rh^2} \frac{h^4}{D}$$

Diagram showing a cross-section of a beam with a central vertical axis and horizontal spacing. The vertical axis is divided into segments of $\frac{1}{2}h$. The horizontal axis is divided into segments of $\frac{1}{2}rh$ and rh .

Diagram showing a cross-section of a beam with a central vertical axis and horizontal spacing. The vertical axis is divided into segments of $\frac{1}{2}h$. The horizontal axis is divided into segments of $\frac{1}{2}rh$ and rh .


			$+\frac{1}{2}r^4$		
		$+4r^2$	$-8r^2 - 2r^4$	$+4r^2$	
	$+8$	$-32 - 8r^2$	$+\frac{136}{3} + 16r^2 + 3r^4$	$-24 - 8r^2$	$+\frac{8}{3}$
		$+4r^2$	$-8r^2 - 2r^4$	$+4r^2$	
			$+\frac{1}{2}r^4$		

$$= \frac{P}{rh^2} \frac{h^4}{D}$$

Diagram showing a cross-section of a beam with a central vertical axis and horizontal spacing. The vertical axis is divided into segments of $\frac{1}{2}h$. The horizontal axis is divided into segments of $\frac{1}{2}rh$ and rh .


NOTE
For general notes see Figure 39.

FIGURE 56 - Load-deflection relations, horizontal spacing: 3 at $rh/2$; 1 at rh , Sheet XVIII.




$$\frac{1}{r^4} \begin{array}{ccccc} & & +6r^4 & & \\ & +8r^2 & -12r^2 - 24r^4 & +4r^2 & \\ +4 & -12 - 16r^2 & +\frac{21}{2} + 24r^2 + 36r^4 & -3 - 8r^2 & +\frac{1}{2} \\ & +8r^2 & -12r^2 - 24r^4 & +4r^2 & \\ & & +6r^4 & & \end{array} = \frac{(P-R)}{rh^2} \frac{h^4}{D}$$

$\left| \leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow \right|$




$$\frac{1}{r^4} \begin{array}{ccccc} & & +2r^4 & & \\ & +8r^2 & -12r^2 - 18r^4 & +4r^2 & \\ +4 & -12 - 16r^2 & +\frac{21}{2} + 24r^2 + 34r^4 & -3 - 8r^2 & +\frac{1}{2} \\ & +8r^2 & -12r^2 - 24r^4 & +4r^2 & \\ & & +6r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

$\left| \leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow \right|$




$$\frac{1}{r^4} \begin{array}{ccccc} & & +\frac{3}{4}r^4 & & \\ & +4r^2 & -6r^2 - \frac{9}{2}r^4 & +2r^2 & \\ +6 & -18 - 12r^2 & +\frac{63}{4} + 18r^2 + \frac{63}{4}r^4 & -\frac{9}{2} - 6r^2 & +\frac{3}{4} \\ & +8r^2 & -12r^2 - 18r^4 & +4r^2 & \\ & & +6r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

$\left| \leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow \right|$



$$\frac{1}{r^4} \begin{array}{ccccc} & & +\frac{3}{4}r^4 & & \\ & +4r^2 & -6r^2 - 3r^4 & +2r^2 & \\ +8 & -24 - 8r^2 & +21 + 12r^2 + \frac{19}{4}r^4 & -6 - 4r^2 & +1 \\ & +4r^2 & -6r^2 - \frac{9}{2}r^4 & +2r^2 & \\ & & +2r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

$\left| \leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow \right|$



$$\frac{1}{r^4} \begin{array}{ccccc} & & +\frac{3}{4}r^4 & & \\ & +4r^2 & -6r^2 - 3r^4 & +2r^2 & \\ +8 & -24 - 8r^2 & +21 + 12r^2 + \frac{9}{2}r^4 & -6 - 4r^2 & +1 \\ & +4r^2 & -6r^2 - 3r^4 & +2r^2 & \\ & & +\frac{3}{4}r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

$\left| \leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow \right|$

NOTE
For general notes see
Figure 39.

FIGURE 57 - Load-deflection relations, horizontal spacing: 2 at $rh/2$; 2 at rh , Sheet XIX.

Diagram showing a vertical stack of four horizontal segments, each of height $\frac{1}{2}h$. The horizontal spacing is indicated as $\frac{1}{2}rh$, rh , rh , and rh .

$$\frac{1}{r^4} \begin{bmatrix} & & +8r^4 & & \\ & +4r^2 & -8r^2 - 32r^4 & +4r^2 & \\ +\frac{4}{3} & -3 - 8r^2 & +\frac{19}{6} + 16r^2 + 48r^4 & -2 - 8r^2 & +\frac{1}{2} \\ & +4r^2 & -8r^2 - 32r^4 & +4r^2 & \\ & & +8r^4 & & \end{bmatrix} = \frac{(P-R)}{rh^2} \frac{h^4}{0}.$$

Diagram showing a vertical stack of four horizontal segments, each of height $\frac{1}{2}h$. The horizontal spacing is indicated as $\frac{1}{2}rh$, rh , rh , and rh .

$$\frac{1}{r^4} \begin{bmatrix} & & +\frac{8}{3}r^4 & & \\ & +4r^2 & -8r^2 - 24r^4 & +4r^2 & \\ +\frac{4}{3} & -3 - 8r^2 & +\frac{19}{6} + 16r^2 + \frac{136}{3}r^4 & -2 - 8r^2 & +\frac{1}{2} \\ & +4r^2 & -8r^2 - 32r^4 & +4r^2 & \\ & & +8r^4 & & \end{bmatrix} = \frac{P}{rh^2} \frac{h^4}{0}.$$

Diagram showing a vertical stack of four horizontal segments, each of height $\frac{1}{2}h$. The horizontal spacing is indicated as $\frac{1}{2}rh$, rh , rh , and rh .

$$\frac{1}{r^4} \begin{bmatrix} & & +r^4 & & \\ & +2r^2 & -4r^2 - 6r^4 & +2r^2 & \\ +2 & -\frac{9}{2} - 6r^2 & +\frac{19}{4} + 12r^2 + 21r^4 & -3 - 6r^2 & +\frac{3}{4} \\ & +4r^2 & -8r^2 - 24r^4 & +4r^2 & \\ & & +8r^4 & & \end{bmatrix} = \frac{P}{rh^2} \frac{h^4}{0}.$$


Diagram showing a vertical stack of four horizontal segments, each of height $\frac{1}{2}h$. The horizontal spacing is indicated as $\frac{1}{2}rh$, rh , rh , and rh .

$$\frac{1}{r^4} \begin{bmatrix} & & +r^4 & & \\ & +2r^2 & -4r^2 - 4r^4 & +2r^2 & \\ +\frac{8}{3} & -6 - 4r^2 & +\frac{19}{3} + 8r^2 + \frac{19}{3}r^4 & -4 - 4r^2 & +1 \\ & +2r^2 & -4r^2 - 6r^4 & +2r^2 & \\ & & +\frac{8}{3}r^4 & & \end{bmatrix} = \frac{P}{rh^2} \frac{h^4}{0}.$$

Diagram showing a vertical stack of four horizontal segments, each of height $\frac{1}{2}h$. The horizontal spacing is indicated as $\frac{1}{2}rh$, rh , rh , and rh .


$$\frac{1}{r^4} \begin{bmatrix} & & +r^4 & & \\ & +2r^2 & -4r^2 - 4r^4 & +2r^2 & \\ +\frac{8}{3} & -6 - 4r^2 & +\frac{19}{3} + 8r^2 + 6r^4 & -4 - 4r^2 & +1 \\ & +2r^2 & -4r^2 - 4r^4 & +2r^2 & \\ & & +r^4 & & \end{bmatrix} = \frac{P}{rh^2} \frac{h^4}{0}.$$

FIGURE 58 - Load-deflection relations, horizontal spacing: 1 at $rh/2$; 3 at rh , Sheet XX.




$$\frac{1}{r^4} \begin{array}{ccccc} & +4r^2 & -8r^2 - 32r^4 & +4r^2 & \\ +\frac{1}{2} & -2 - 8r^2 & +3 + 16r^2 + 48r^4 & -2 - 8r^2 & +\frac{1}{2} \\ & +4r^2 & -8r^2 - 32r^4 & +4r^2 & \\ & & +8r^4 & & \end{array} = \frac{(P-R)}{rh^2} \frac{h^4}{D}$$

$\leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow$




$$\frac{1}{r^4} \begin{array}{ccccc} & +\frac{8}{3}r^4 & & & \\ & +4r^2 & -8r^2 - 24r^4 & +4r^2 & \\ +\frac{1}{2} & -2 - 8r^2 & +3 + 16r^2 + \frac{136}{3}r^4 & -2 - 8r^2 & +\frac{1}{2} \\ & +4r^2 & -8r^2 - 32r^4 & +4r^2 & \\ & & +8r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

$\leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow$




$$\frac{1}{r^4} \begin{array}{ccccc} & +r^4 & & & \\ & +2r^2 & -4r^2 - 6r^4 & +2r^2 & \\ +\frac{3}{4} & -3 - 6r^2 & +\frac{3}{2} + 12r^2 + 21r^4 & -3 - 6r^2 & +\frac{3}{4} \\ & +4r^2 & -8r^2 - 24r^4 & +4r^2 & \\ & & +8r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

$\leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow$



$$\frac{1}{r^4} \begin{array}{ccccc} & +r^4 & & & \\ & +2r^2 & -4r^2 - 4r^4 & +2r^2 & \\ +1 & -4 - 4r^2 & +6 + 8r^2 + \frac{19}{3}r^4 & -4 - 4r^2 & +1 \\ & +2r^2 & -4r^2 - 6r^4 & +2r^2 & \\ & & +\frac{8}{3}r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

$\leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow$



$$\frac{1}{r^4} \begin{array}{ccccc} & +r^4 & & & \\ & +2r^2 & -4r^2 - 4r^4 & +2r^2 & \\ +1 & -4 - 4r^2 & +6 + 8r^2 + 6r^4 & -4 - 4r^2 & +1 \\ & +2r^2 & -4r^2 - 4r^4 & +2r^2 & \\ & & +r^4 & & \end{array} = \frac{P}{rh^2} \frac{h^4}{D}$$

$\leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow \leftarrow rh \rightarrow$

NOTE
For general notes see Figure 39.

FIGURE 59 - Load deflection relations, horizontal spacing: 4 at rh, Sheet XXI.

$$M_x = \frac{0}{h^2} \frac{1}{r^2} \begin{array}{|c|c|c|} \hline & +\mu r^2 & \\ \hline +1 & -2-2\mu r^2 & +1 \\ \hline & +\mu r^2 & \\ \hline \end{array}$$

(a)

$$M_y = \frac{0}{h^2} \frac{1}{r^2} \begin{array}{|c|c|c|} \hline & +r^2 & \\ \hline +\mu & -2\mu-2r^2 & +\mu \\ \hline & +r^2 & \\ \hline \end{array}$$

(b)

$$M_{xy} = M_{yx} = \frac{0}{h^2} \frac{(1-\mu)}{4r^2}$$

$$\begin{array}{|c|c|c|} \hline -r & 0 & +r \\ \hline 0 & 0 & 0 \\ \hline +r & 0 & -r \\ \hline \end{array}$$

(c)

INTERIOR POINT

$$M_x = \frac{0}{h^2} \frac{1}{r^2} \begin{array}{|c|c|c|} \hline & +(1-\mu^2) & -2(1-\mu^2) & +(1-\mu^2) \\ \hline \end{array}$$

(d)

$$M_x = \frac{0}{h^2} \frac{1}{r^2} \begin{array}{|c|c|} \hline * & +2 \\ \hline \end{array}$$

(e)

$$M_x = \frac{0}{h^2} \frac{1}{r^2} \begin{array}{|c|c|} \hline * & +2(1-\mu^2) \\ \hline \end{array}$$

(f)

$$M_y = \frac{0}{h^2} \frac{1}{r^2} \begin{array}{|c|} \hline +(1-\mu^2)r^2 \\ \hline -2(1-\mu^2)r^2 \\ \hline +(1-\mu^2)r^2 \\ \hline \end{array}$$

(g)

$$M_y = \frac{0}{h^2} \frac{1}{r^2} \begin{array}{|c|} \hline +2r^2 \\ \hline * \\ \hline \end{array}$$

(h)

$$M_y = \frac{0}{h^2} \frac{1}{r^2} \begin{array}{|c|} \hline +2(1-\mu^2)r^2 \\ \hline * \\ \hline \end{array}$$

(i)

EDGE AND CORNER POINTS

$$M_x = \frac{0}{h^2} \frac{1}{3r^2} \begin{array}{|c|c|c|} \hline & +4\mu r^2 & \\ \hline +3 & -6-12\mu r^2 & +3 \\ \hline & +8\mu r^2 & \\ \hline \end{array}$$

(j)

$$M_y = \frac{0}{h^2} \frac{1}{3r^2} \begin{array}{|c|} \hline +4(1-\mu^2)r^2 \\ \hline -12(1-\mu^2)r^2 \\ \hline +8(1-\mu^2)r^2 \\ \hline \end{array}$$

(k)

$$M_y = \frac{0}{h^2} \frac{1}{3r^2} \begin{array}{|c|c|c|} \hline & +4r^2 & \\ \hline +3\mu & -6\mu-12r^2 & +3\mu \\ \hline & +8r^2 & \\ \hline \end{array}$$

(m)

INTERIOR AND EDGE POINTS - NONUNIFORM SPACING

$$M_y = \frac{0}{h^2} \frac{1}{r^2} \begin{array}{|c|} \hline +8r^2 \\ \hline * \\ \hline \end{array}$$

(n)

$$M_y = \frac{0}{h^2} \frac{1}{r^2} \begin{array}{|c|} \hline +32r^2 \\ \hline * \\ \hline \end{array}$$

(p)

$$M_y = \frac{0}{h^2} \frac{1}{r^2} \begin{array}{|c|} \hline +128r^2 \\ \hline * \\ \hline \end{array}$$

(q)

$$M_y = \frac{0}{h^2} \frac{1}{r^2} \begin{array}{|c|} \hline +8(1-\mu^2)r^2 \\ \hline * \\ \hline \end{array}$$

(r)

$$M_y = \frac{0}{h^2} \frac{1}{r^2} \begin{array}{|c|} \hline +32(1-\mu^2)r^2 \\ \hline * \\ \hline \end{array}$$

(s)

$$M_y = \frac{0}{h^2} \frac{1}{r^2} \begin{array}{|c|} \hline +128(1-\mu^2)r^2 \\ \hline * \\ \hline \end{array}$$

(t)

EDGE AND CORNER POINTS - FRACTIONAL VERTICAL SPACING

NOTES

$M_x = M_y = 0$ at either a fixed or moment-free corner.
 $M_{xy} = M_{yx} = 0$ at any point on a fixed edge.

NOTE

For general notes see Figure 39.

FIGURE 60 - Moment-deflection relations.

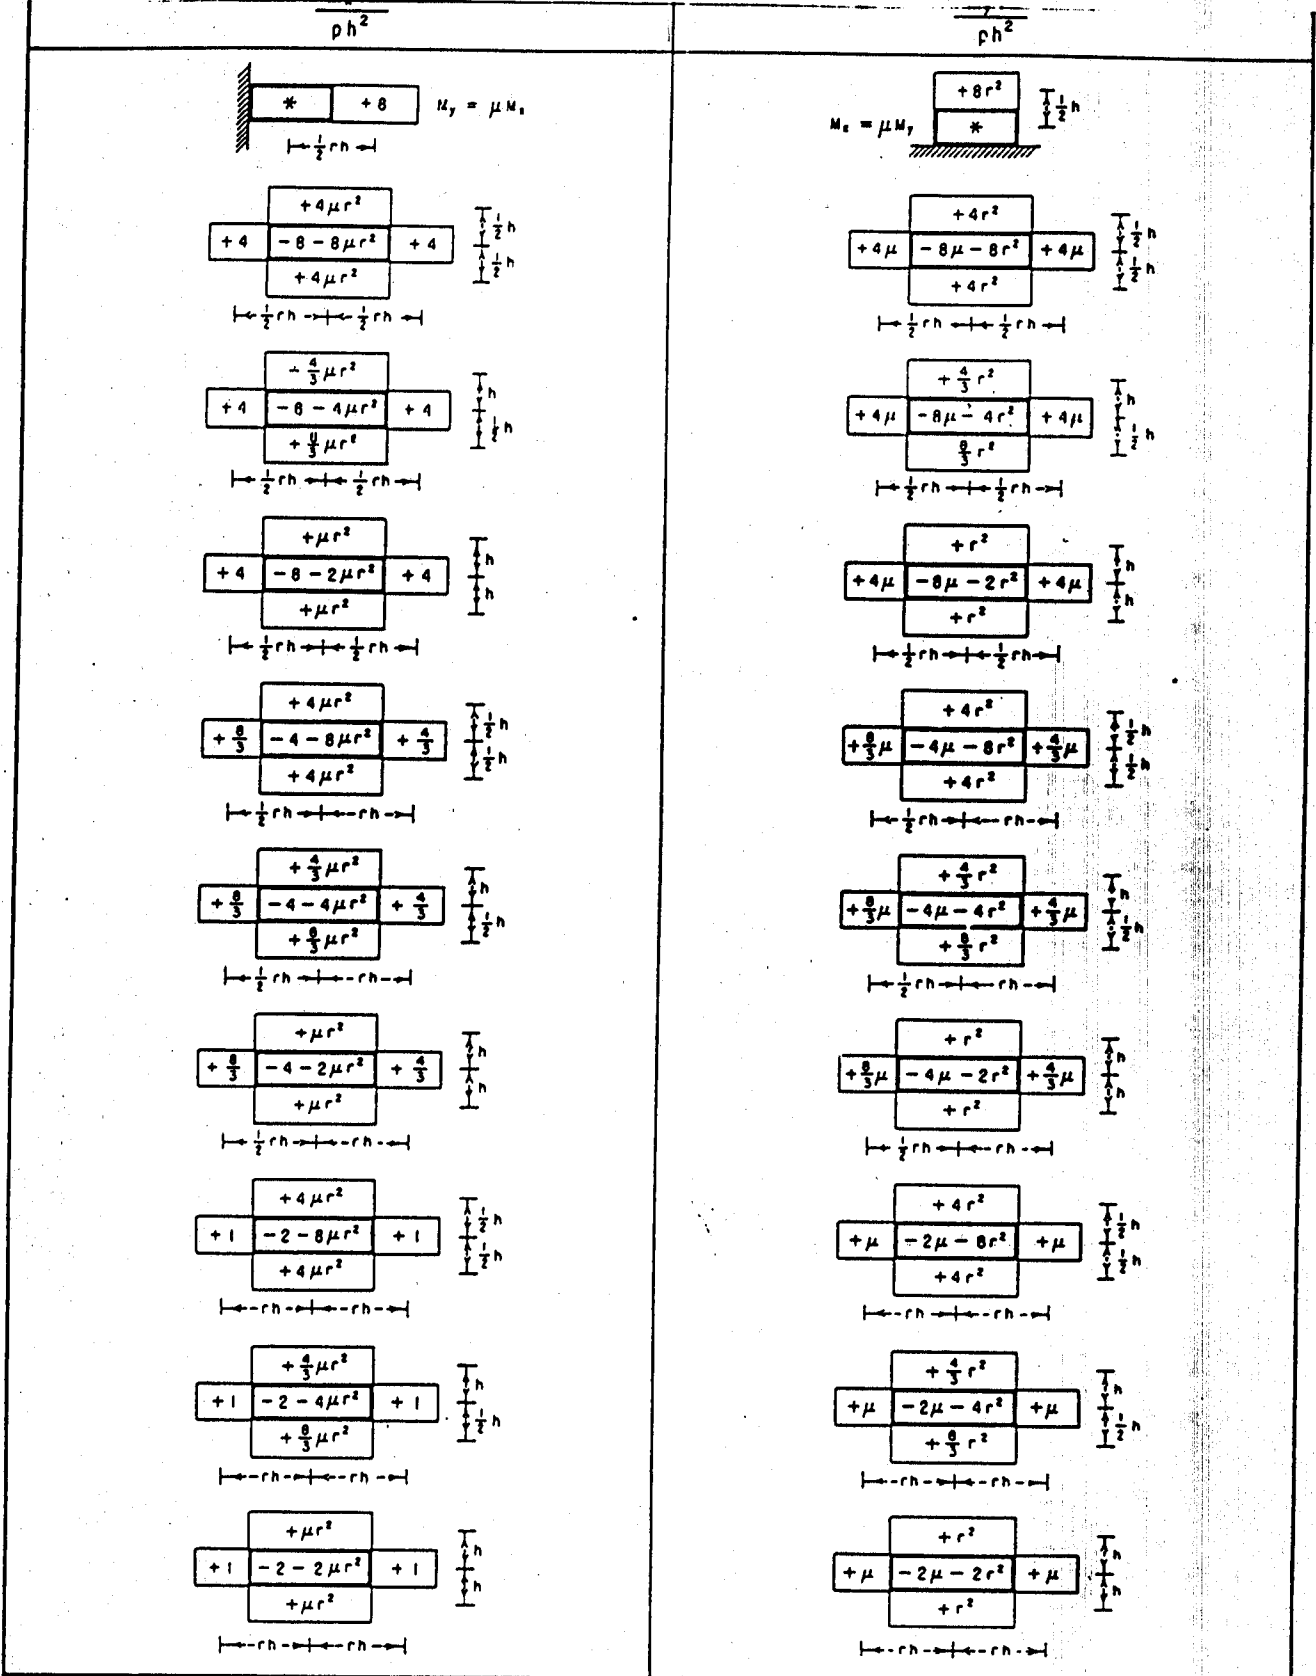


FIGURE 61 - Moment-deflection relations, various point spacings.

$$V_x = \frac{D}{h^3} \frac{1}{2r^3} \begin{array}{|c|c|c|c|c|} \hline & +r^2 & 0 & -r^2 & \\ \hline +1 & -2(1+r^2) & 0 & +2(1+r^2) & -1 \\ \hline & +r^2 & 0 & -r^2 & \\ \hline \end{array}$$

(a)

$$V_y = \frac{D}{h^3} \frac{1}{2r^2} \begin{array}{|c|c|c|} \hline & -r^2 & \\ \hline -1 & +2(1+r^2) & -1 \\ \hline 0 & 0 & 0 \\ \hline +1 & -2(1+r^2) & +1 \\ \hline & +r^2 & \\ \hline \end{array}$$

(b)

INTERIOR POINT

$$V_x = \frac{D}{h^3} \frac{1}{2r^3} \begin{array}{|c|c|c|c|} \hline & +r^2 & 0 & -r^2(1-\mu) \\ \hline +1 & -2(1+r^2) & +1 & +2r^2(1-\mu) \\ \hline & +r^2 & 0 & -r^2(1-\mu) \\ \hline \end{array}$$

(c)

$$V_y = \frac{D}{h^3} \frac{1}{2r^2} \begin{array}{|c|c|c|} \hline -(1-\mu) & +2(1-\mu) & -(1-\mu) \\ \hline 0 & +r^2 & 0 \\ \hline +1 & -2(1+r^2) & +1 \\ \hline & +r^2 & \\ \hline \end{array}$$

(d)

POINT ADJACENT TO A MOMENT-FREE EDGE

$$V_x = \frac{D}{h^3} \frac{1}{2r^3} \begin{array}{|c|c|c|c|} \hline -(1-\mu) & -2(1-\mu) & 0 & +2(1-\mu) \\ \hline \end{array}$$

(e)

$$V_y = \frac{D}{h^3} \frac{1}{2r^2} \begin{array}{|c|} \hline -r^2(1-\mu) \\ \hline +2r^2(1-\mu) \\ \hline 0 \\ \hline -2r^2(1-\mu) \\ \hline +r^2(1-\mu) \\ \hline \end{array}$$

(f)

POINT ON A MOMENT-FREE EDGE

$$V_x = \frac{D}{h^3} \frac{1}{2r^3} \begin{array}{|c|c|c|c|} \hline +(1-\mu) & -2(1-\mu) & +(1-\mu) & 0 \\ \hline \end{array}$$

$$V_y = \frac{R}{rh}$$

(g)

$$V_y = \frac{D}{h^3} \frac{1}{2r^2} \begin{array}{|c|} \hline 0 \\ \hline +r^2(1-\mu) \\ \hline -2r^2(1-\mu) \\ \hline +r^2(1-\mu) \\ \hline \end{array}$$

$$V_x = \frac{R}{rh}$$


(h)

POINT ON A MOMENT-FREE EDGE ADJACENT TO A MOMENT-FREE CORNER


NOTE

For general notes see Figure 39.

FIGURE 62 - Shear-deflection relations, Sheet I.

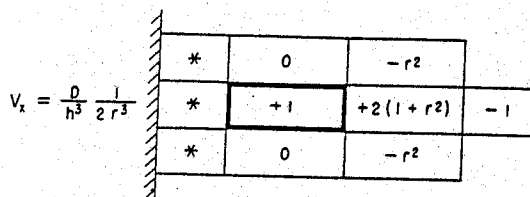


(a)

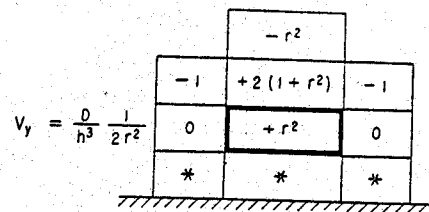


(b)

POINT ADJACENT TO A FIXED EDGE



$$V_y = \frac{R}{rh}$$


(c)

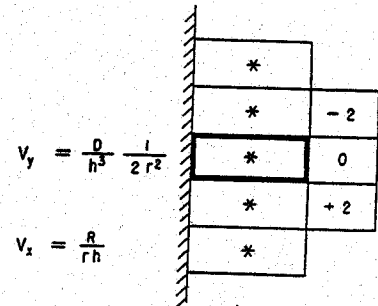

$$V_x = \frac{R}{rh}$$


(d)

POINT ON A FIXED EDGE

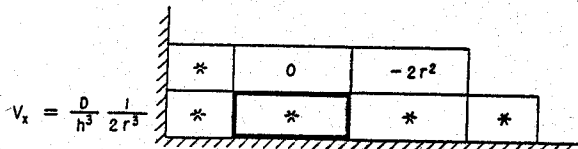

$$V_y = \frac{R}{rh}$$


(e)

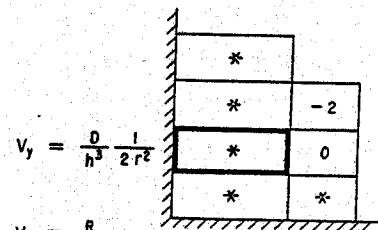

$$V_x = \frac{R}{rh}$$


(f)

POINT ON A FIXED EDGE ADJACENT TO A FIXED CORNER



$$V_y = \frac{R}{rh}$$

(g)



$$V_x = \frac{R}{rh}$$

(h)

POINT ON A MOMENT-FREE EDGE ADJACENT TO A FIXED EDGE

NOTE

For general notes see Figure 39.

FIGURE 63 - Shear-deflection relations, Sheet II.

$$V_x = \frac{ph}{r^3}$$

	$+r^2$	0
$+1$	$-2(1+r^2)$	*
	$+r^2$	0

$\begin{array}{c} \uparrow h \\ \uparrow h \\ \uparrow h \end{array}$

$\leftarrow rh \rightarrow \leftarrow rh \rightarrow$

$$V_y = \frac{ph}{r^2}$$

0	*	0
$+1$	$-2(1+r^2)$	$+1$
	$+r^2$	

$\begin{array}{c} \uparrow h \\ \uparrow h \\ \uparrow h \end{array}$

$\leftarrow rh \rightarrow \leftarrow rh \rightarrow$

$$V_x = \frac{ph}{3r^3}$$

	$+4r^2$	0
$+3$	$-6(1+2r^2)$	*
	$+8r^2$	0

$\begin{array}{c} \uparrow h \\ \uparrow \frac{1}{2}h \\ \uparrow \frac{1}{2}h \end{array}$

$\leftarrow rh \rightarrow \leftarrow rh \rightarrow$

$$V_y = \frac{ph}{3r^2}$$

0	*	0
$+8$	$-6(2+r^2)$	$+4$
	$+3r^2$	

$\begin{array}{c} \uparrow h \\ \uparrow \frac{1}{2}h \\ \uparrow \frac{1}{2}h \end{array}$

$\leftarrow \frac{1}{2}rh \rightarrow \leftarrow rh \rightarrow$

$$V_x = \frac{ph}{r^3}$$

	$+4r^2$	0
$+1$	$-2(1+4r^2)$	*
	$+4r^2$	0

$\begin{array}{c} \uparrow \frac{1}{2}h \\ \uparrow \frac{1}{2}h \\ \uparrow \frac{1}{2}h \end{array}$

$\leftarrow rh \rightarrow \leftarrow rh \rightarrow$

$$V_y = \frac{ph}{r^2}$$

0	*	0
$+4$	$-2(4+r^2)$	$+4$
	$+r^2$	


$\begin{array}{c} \uparrow \frac{1}{2}h \\ \uparrow \frac{1}{2}h \\ \uparrow \frac{1}{2}h \end{array}$

$\leftarrow \frac{1}{2}rh \rightarrow \leftarrow \frac{1}{2}rh \rightarrow$

Note: These arrays apply only where the load at corresponding points on opposite sides of the centerline is equal in magnitude but opposite in direction.


NOTE
For general notes see Figure 39.

FIGURE 64 - Shear-deflection relations, Sheet III.

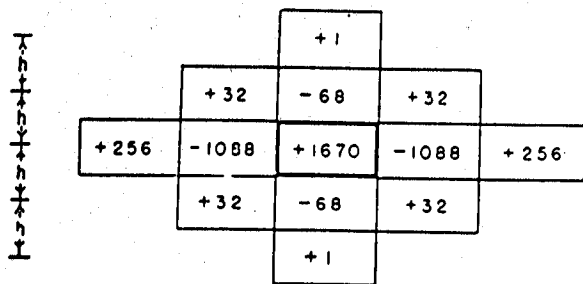


$\left| \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \right|$

(a) INTERIOR POINT

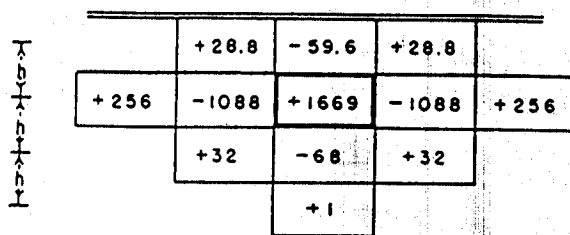

$\left| \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \right|$


(b) POINT ADJACENT TO A FREE X-EDGE

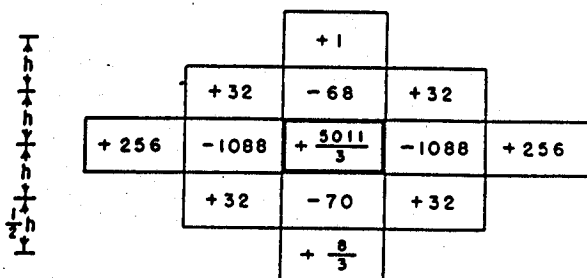

$\left| \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \right|$


(c) INTERIOR POINT

VERTICAL SPACING: 3 AT h ; 1 AT $\frac{1}{2}h$

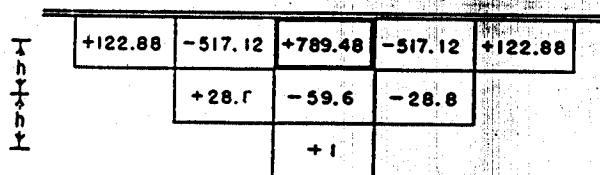

$\left| \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \right|$


(d) POINT ON A FREE X-EDGE

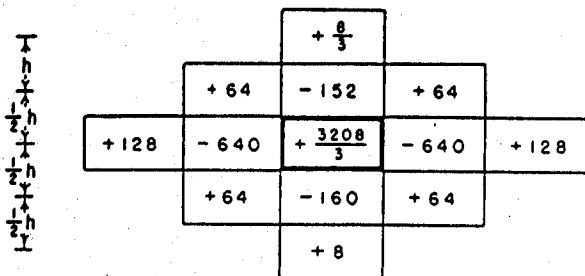

$\left| \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \right|$

(e) INTERIOR POINT

VERTICAL SPACING: 1 AT h ; 3 AT $\frac{1}{2}h$

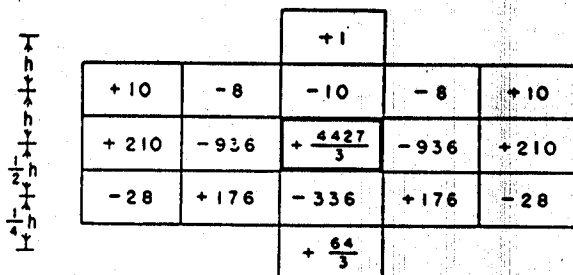

$\left| \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \leftarrow \frac{1}{4}h \rightarrow \right|$

(f) INTERIOR POINT

VERTICAL SPACING: 2 AT h ; 1 AT $\frac{1}{2}h$; 1 AT $\frac{1}{4}h$


NOTE

To form the difference equation for any focal point, multiply the coefficients of the applicable array by the deflection of each corresponding point and equate their sum to the load term $(\frac{p}{rh^2} \cdot \frac{h}{d})$ for the focal point.

FIGURE 65 - Load-deflection coefficients, $r = 1/4$, $\mu = 0.2$.

	y/b \ x/a	DEFLECTION COEFFICIENTS - 30 EQUATIONS				
		0.2	0.4	0.6	0.8	1.0
LOAD I	1.0	+ .017022	+ .049680	+ .083466	+ .107935	+ .116792
	0.8	+ .016122	+ .046840	+ .078499	+ .101377	+ .109650
	0.6	+ .016030	+ .046526	+ .077914	+ .100572	+ .108761
	0.4	+ .015353 *	+ .044177 *	+ .073597 *	+ .094719 *	+ .102331 *
	0.2	+ .011196 *	+ .031304 *	+ .051265 *	+ .065339 *	+ .070366 *
	0.1	+ .005859 *	+ .015907 *	+ .025588 *	+ .032283 *	+ .034651 *
LOAD II	1.0	+ .000426	+ .001800	+ .003572	+ .005018	+ .005570
	0.8	+ .003026	+ .009459	+ .016489	+ .021746	+ .023678
	0.6	+ .011081	+ .031691	+ .052629	+ .067621	+ .073018
	0.4	+ .014484 *	+ .041246 *	+ .068290 *	+ .087579 *	+ .094508 *
	0.2	+ .011123 *	+ .030992 *	+ .050636 *	+ .064448 *	+ .069374 *
	0.1	+ .005866 *	+ .015887 *	+ .025515 *	+ .032518 *	+ .034506 *
LOAD IV	1.0	+ .001780	+ .005582	+ .009748	+ .012870	+ .014019
	0.8	+ .003614	+ .010653	+ .018006	+ .023367	+ .025313
	0.6	+ .006462	+ .018748	+ .031388	+ .040509	+ .043804
	0.4	+ .008999 *	+ .025735 *	+ .042710 *	+ .054845 *	+ .059210 *
	0.2	+ .008349 *	+ .023051 *	+ .037455 *	+ .047522 *	+ .051102 *
	0.1	+ .004804 *	+ .012753 *	+ .020243 *	+ .025348 *	+ .027141 *

$$\text{Deflection} = (\text{Coefficient})(ph^4/D)$$

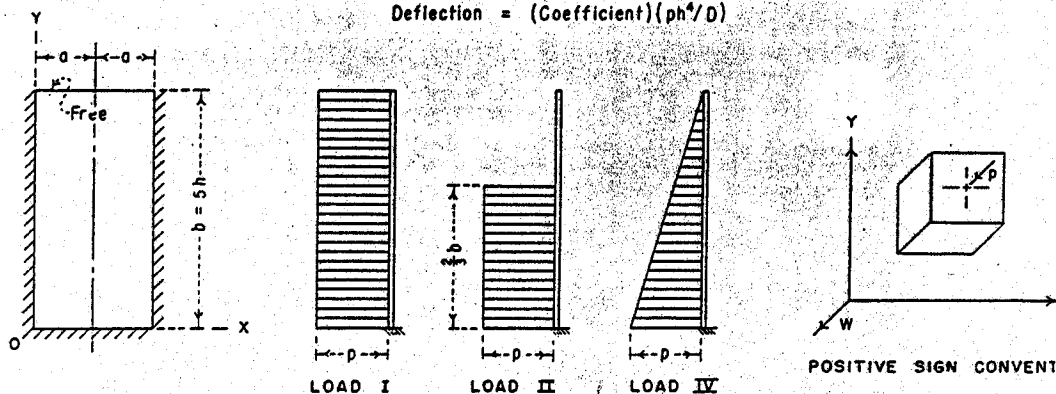


	y/b \ x/a	DEFLECTION COEFFICIENTS - 20 EQUATIONS				
		0.2	0.4	0.6	0.8	1.0
LOAD I	0.4	+ .015283	+ .043935	+ .073156	+ .094124	+ .101678
	0.2	+ .010730	+ .029914	+ .048903	+ .062267	+ .067035
	0.1	+ .004899	+ .013281	+ .021325	+ .026868	+ .028824
	0.05	+ .001835	+ .004944	+ .007860	+ .009833	+ .010522
LOAD II	0.4	+ .014414	+ .041004	+ .067848	+ .086983	+ .093855
	0.2	+ .010657	+ .029598	+ .048268	+ .061367	+ .066034
	0.1	+ .004900	+ .013246	+ .021229	+ .026715	+ .028649
	0.05	+ .001840	+ .004945	+ .007847	+ .009805	+ .010489
LOAD IV	0.4	+ .008937	+ .025523	+ .042324	+ .054326	+ .058641
	0.2	+ .007946	+ .021849	+ .035416	+ .044873	+ .048232
	0.1	+ .003980	+ .010505	+ .016603	+ .020734	+ .022181
	0.05	+ .001579	+ .004080	+ .006341	+ .007838	+ .008356

$$\text{Deflection} = (\text{Coefficient})(ph^4/D)$$


NOTE

Starred values computed from 30 equations are discarded when the corresponding improved value is obtained from the 20 equations.


FIGURE 67 - Plate fixed along three edges, deflection coefficients. $a/b = 1/4$. Various loadings.




(a) POINT ON A FIXED Y-FREE X-CORNER
[FIGURE 39 (i)]




(b) POINT ON A FIXED Y-EDGE
ADJACENT TO A MOMENT-FREE X-EDGE
[FIGURE 39 (h)]




(c) POINT ON A FIXED Y-EDGE
VERTICAL SPACING: h AND $\frac{1}{4}h$
[FIGURE 42 (a)]



(d) POINT ON A FIXED Y-EDGE
VERTICAL SPACING: $\frac{1}{4}h$ AND $\frac{1}{4}h$
[FIGURE 44 (a)]




(e) POINT ON A FIXED CORNER
[FIGURE 49 (a)]




(f) POINT ON A FIXED X-EDGE
[FIGURE 49 (a)]

REACTION-DEFLECTION COEFFICIENTS


$r = 1/4$ $\mu = 0.2$



(g) INTERIOR POINT
[FIGURE 52 (a)]




(h) POINT ON A FREE EDGE
[FIGURE 52 (d)]




(i) INTERIOR POINT
VERTICAL SPACING: h AND $\frac{1}{4}h$
[FIGURE 52 (j)]

BENDING MOMENT-DEFLECTION COEFFICIENTS (M_x)


$r = 1/4$ $\mu = 0.2$



(j) INTERIOR POINT
[FIGURE 52 (b)]



(k) POINT ON A FIXED EDGE
[FIGURE 52 (p)]



(m) INTERIOR POINT
VERTICAL SPACING: h AND $\frac{1}{4}h$
[FIGURE 52 (m)]

BENDING MOMENT-DEFLECTION COEFFICIENTS (M_y)

$r = 1/4$ $\mu = 0.2$

NOTES

To find the net reaction or the bending moment at any focal point, compute the products of the coefficients of the appropriate array by the deflection of the corresponding points and multiply their sum by (D/h^2) . Figure numbers in brackets refer to general expressions from which these numerical arrays were computed.

FIGURE 69 - Numerical values of typical moment and reaction arrays, $r = 1/4$, $\mu = 0.2$.

DEFLECTIONS - $w/(ph^4/D)$							
POINT NO.							
TENS UNITS	0	1	2	3	4	5	
6	0	+ .017022	+ .049680	+ .083466	+ .107935	+ .116792	
5	0	+ .016122	+ .046840	+ .078499	+ .101377	+ .109650	
4	0	+ .016030	+ .046526	+ .077914	+ .100572	+ .108761	
3	0	+ .015283	+ .043935	+ .073156	+ .094124	+ .101678	
2	0	+ .010730	+ .029914	+ .048903	+ .062267	+ .067035	
1	0	+ .004899	+ .013281	+ .021325	+ .026868	+ .028824	
7	0	+ .001835	+ .004944	+ .007860	+ .009833	+ .010522	
0	0	0	0	0	0	0	

POINT NO.	REACTIONS			
	P/ph^2	DEFL. TERM	R/ph^2	R_t/ph
06	+ .0625	+ .558356	+ .620856	+ .248342
05	+ .125	+ 1.136626	+ 1.261626	+ .252325
04	+ .125	+ 1.131256	+ 1.256256	+ .251251
03	+ .125	+ 1.131056	+ 1.256056	+ .251211
02	+ .09375	+ .738474	+ .832224	+ .190484
01	+ .046875	+ .178392	+ .225267	—
07	+ .03125	- .000992	+ .030258	—
00	+ .015625	- .058720	- .043095	+ .029514
10	+ .03125	- .001712	+ .029538	+ .023630
20	+ .03125	+ .110096	+ .141346	+ .113077
30	+ .03125	+ .192016	+ .223266	+ .178613
40	+ .03125	+ .240512	+ .271762	+ .217410
50	+ .03125	+ .256320	+ .287570	+ .230056
	Σ^*		+ 6.249145	

* Includes only $\frac{1}{2}$ of R_{50} .

BENDING MOMENT - M_x/pb^2						
POINT NO.						
TENS	0	1	2	3	4	5
UNITS						
6	+ .020917	+ .009607	+ .000693	- .005724	- .009592	- .010883
5	+ .020636	+ .009348	+ .000622	- .005585	- .009301	- .010531
4	+ .020518	+ .009253	+ .000553	- .005621	- .009305	- .010531
3	+ .019562	+ .008526	+ .000273	- .005438	- .008788	- .009890
2	+ .013734	+ .005335	- .000330	- .003930	- .005917	- .006549
0	0	+ .000470	+ .001266	+ .002012	+ .002517	+ .002694

POINT NO.	BENDING MOMENT - M_y/pb^2					
	TENS					
UNITS	0	1	2	3	4	5
6	0	0	0	0	0	0
5	+ .004127	+ .001901	+ .000221	- .000949	- .001639	- .001868
4	+ .004104	+ .001825	+ .000023	- .001284	- .002078	- .002344
3	+ .003912	+ .001559	- .000384	- .001836	- .002734	- .003036
2	+ .002747	+ .000703	- .001051	- .002368	- .003177	- .003449
0	0	+ .002349	+ .006328	+ .010061	+ .012586	+ .013468

FIGURE 70 - Plate fixed along three edges, deflections-- reactions--bending moments, Load I. $a/b = 1/4$, $\mu = 0.2$.