




FINISH SCHEDULE:

SERIAL NUMBER		ROOMS	FLOORS	SKIRTING (150MM HIGH)	INTERNAL WALLS	CEILING	EXTERNAL WALL	ROOF
			GRANOLITHIC FLOORING WITH METALLIC HARDENER	CEMENT SKIRTING	ACRYLIC EMULSION PAINT	OIL BOUND DISTEMPER	NOVALUX EXTERIOR PAINT	20MM THK MANGALORE TILES
01	DG ROOM 1&2		●	●	●	●	●	●

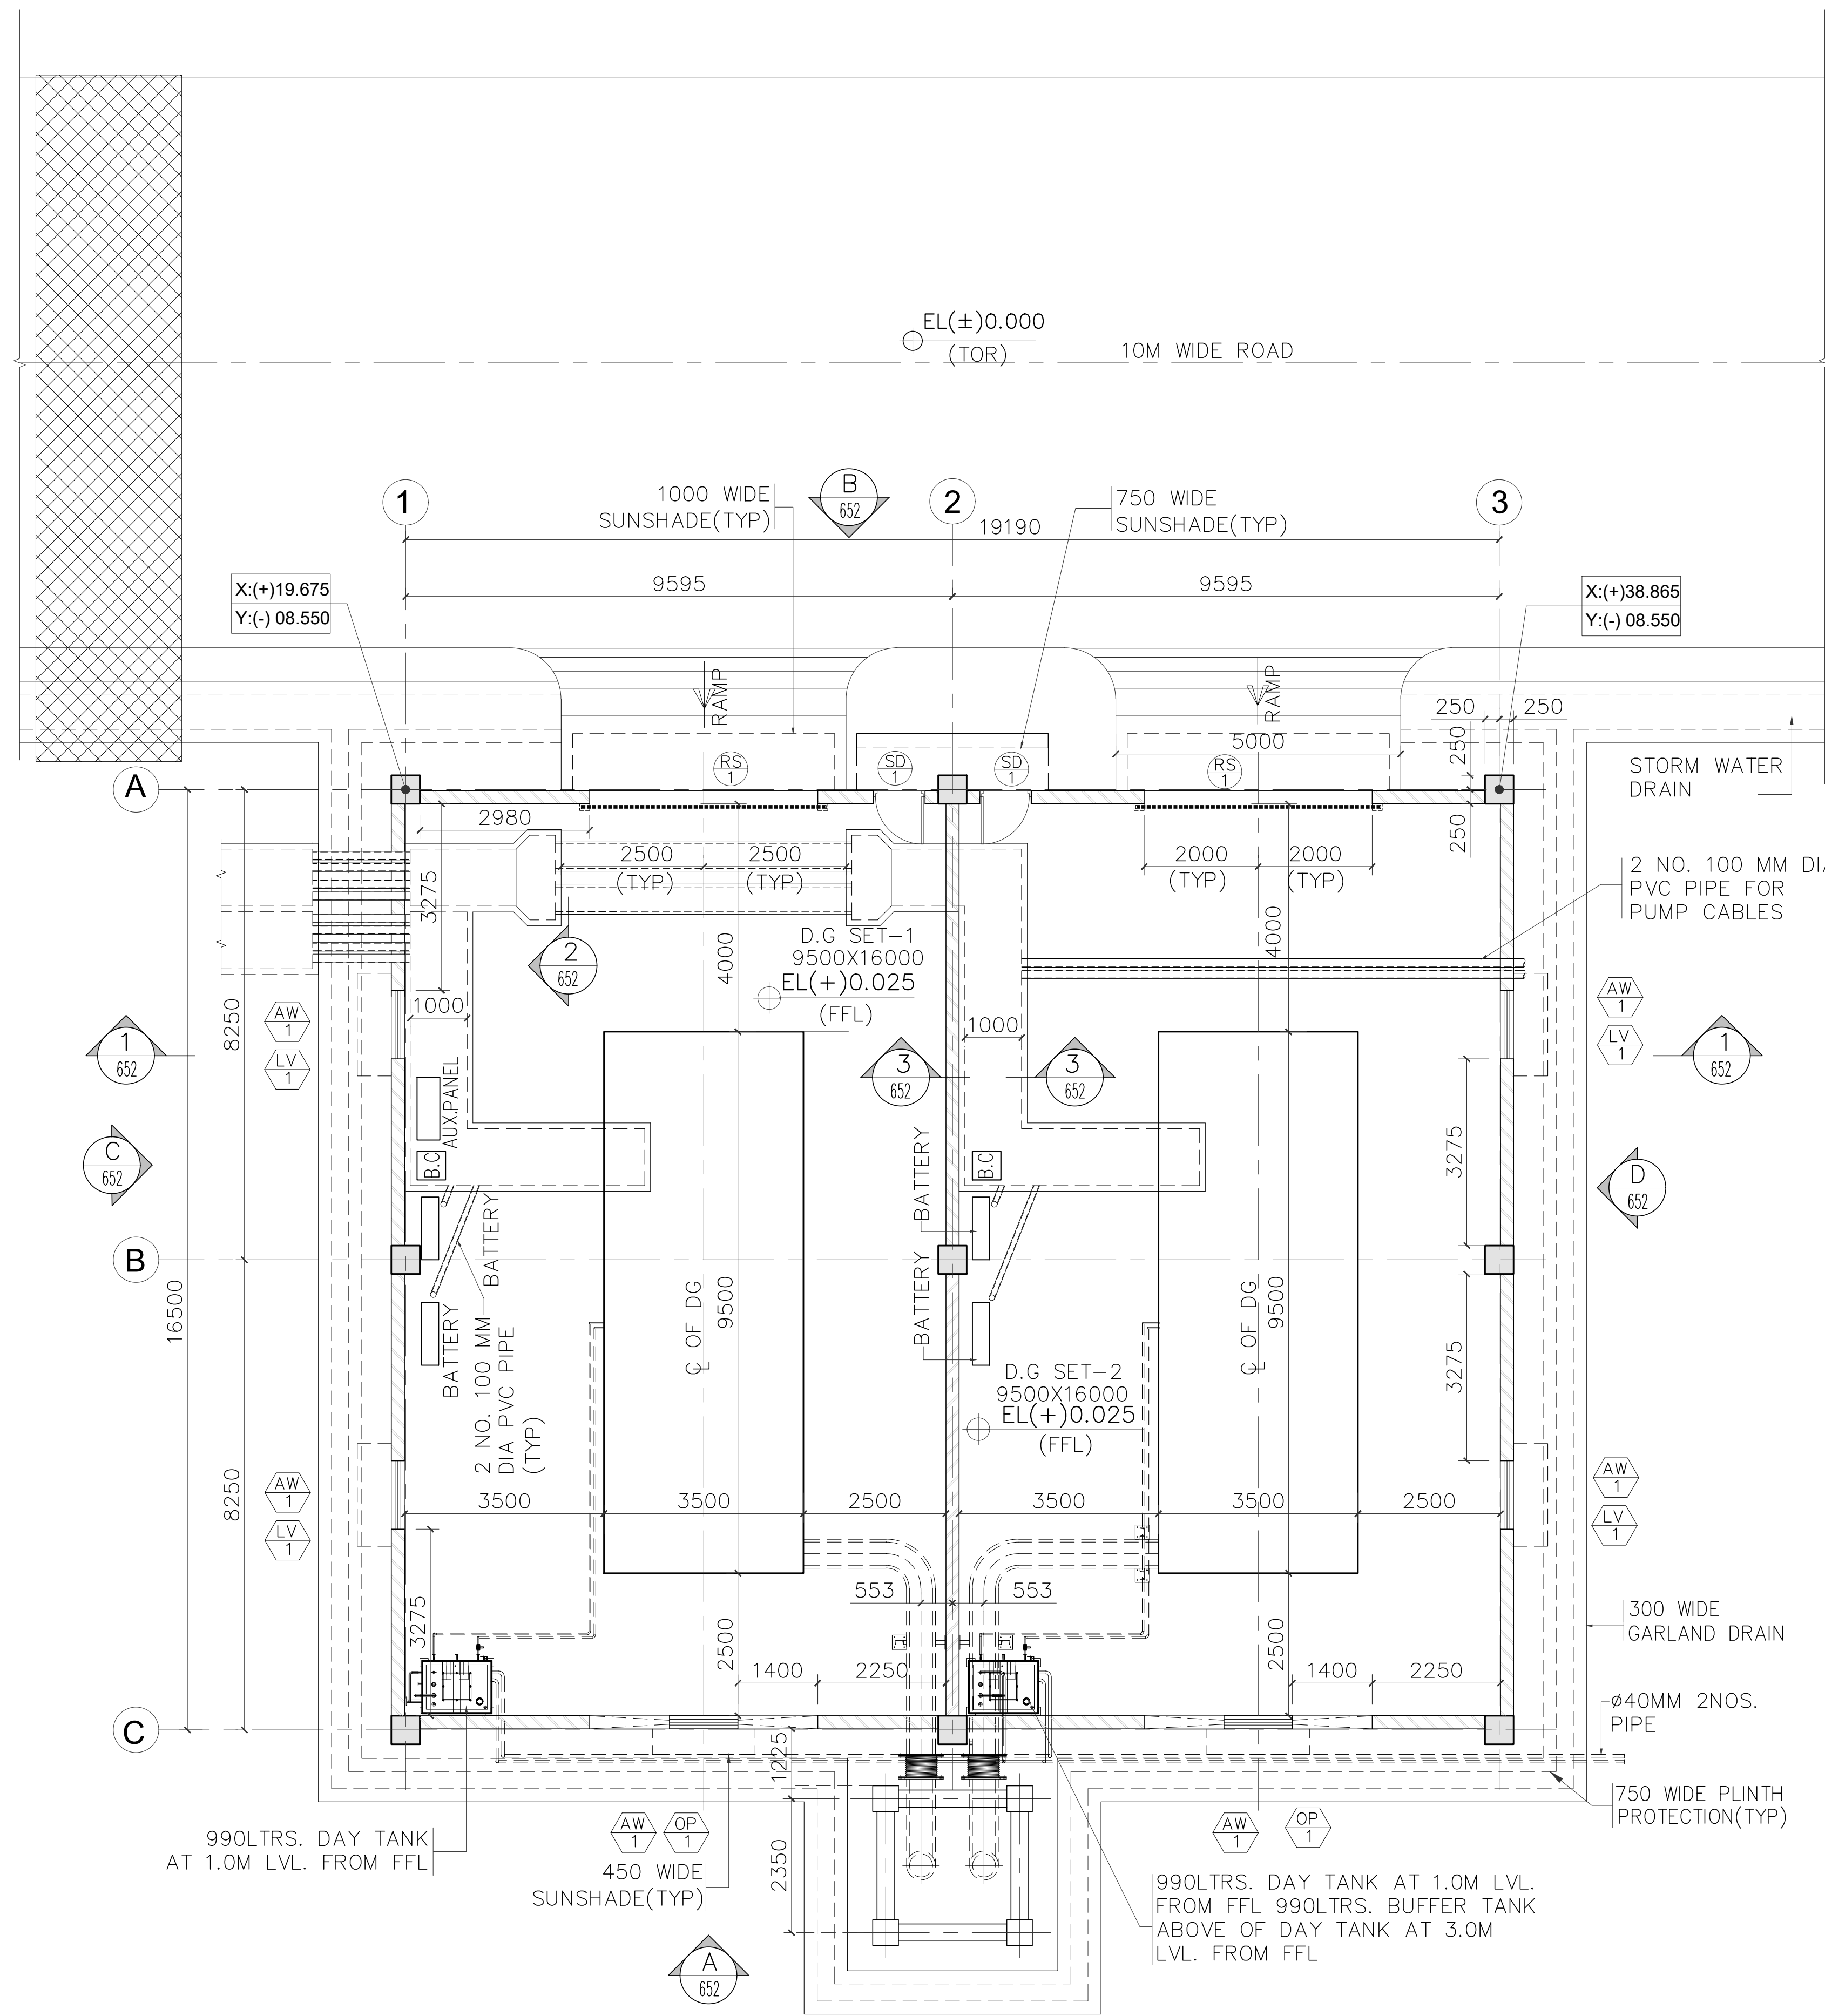

SCHEDULE OF JOINERY

SYMBOL	Nos.	MASONRY OPENING		REMARKS
		WIDTH	HEIGHT	
	02	4000	4500	ROLLING SHUTTER(OPEN MESH TYPE) (MESH SIZE 4000X2500)
	02	900	2100	STEEL DOOR – SINGLE SHUTTER
	06	1200	1200	ALUMINUM FRAMED GLAZED OPENABLE WINDOW WITH TWO EQUAL PANELS
	04	1200	600	LOUVER TYPE VENTILATOR
	02	4000	1200	DUCT OPENING
	02	ø600		EXHAUST PIPE OPENING

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETER AND LEVELS ARE IN METERS, UNO.
2. ALL ELEVATIONS ARE REFERRED TO FINISHED FLOOR LEVEL OF VALVE HALL EL(±)0.000M WHICH CORRESPONDS TO RL (+)76.655MSL.
3. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH CONTRACT TERMS AND CONDITIONS AND SPECIFICATION.

LEGEND:

	230 THK BRICK WALL	TYP	TYPICAL
BOC	BOTTOM OF CONCRETE	TOC	TOP OF THE CONCRETE
EL	ELEVATION	TOR	TOP OF ROAD
FGL	FINISHED GROUND LEVEL		
FFL	FINISHED FLOOR LEVEL		
FPL	FINISHED PAVING LEVEL		
IL	INVERT LEVEL		